

CAPLIN LIBERATOR 4.3 Administration Guide

December 2006

Preface
What this document contains 15
Who should read this document 15
Typographical conventions 15
Acronyms and glossary 15
Feedback
Acknowledgments
Overview 17
What is the Liberator? 17 Caplin's Platform architecture 18
What's new in version 4.2? 20
Architectural examples 21 Example 1—internal network 21 Example 2—Internet 21
Functions and features of the Liberator22Operational features22Permissioning and security features23The Liberator web site24Restricting data25
Liberator's data sources25Data sources25Data source features26Data features27
Getting started 30
Installing Liberator.30Introduction30Conventions and Assumptions30Step-by-Step Standard Install30Upgrading Liberator.32

Starting Liberator	
Introduction	
Step-By-Step Start-up	
About your Liberator licence	
Licence limits	
Full secure set up on Linux and Solaris	
Running multiple Liberators from the same install location	
Clustering and intelligent source routing	
Intelligent Source Routing	
Step-by-step examples	
Basic active request	
Two clients actively request same data	
Active request with DataSource failover/load balancing	
Active requests for data from 2 sources	
Passive source-broadcast data	
Liberator failover	
Liberator and DataSource failover	
Requesting news headlines	
Requesting news stories	
Requesting historic news headlines	
Throttling updates	
Authentication and authorisation of users using Auth Modules 72	
About the data	
What is RTTP?	
Key features of RTTP	
Smart tunnelling	
Persistent Virtual Connection (PVC)	
Data Status	
About RTTP objects	
Directory	
Page	
Record	

News headline and news story	79 79 79 80 80 81
Туре 2 data	
Communicating with clients 8	33
Enabling clients to connect using RTTP (over HTTP). 8 Specifying the Liberator URL. 8 Configuring the HTTP Keep Alive feature. 8 Using cookies to aid HTTP connection 8	83 83
Using cookies to ald HTTP connection 8 Enabling clients to connect using HTTPS 8 Making an HTTPS connection 8 Virtual hosting 8 Configuring the HTTPS connection 8 Applying the security policy 8 Sample certificates and certificate authorities 8 Configuring hardware devices 8	84 84 85 86 87
Enabling clients to connect using RTTP (direct connection)	
Configuring objects	90
Identifying the fields clients can request Setting the number of decimal places Setting the record data to Type 2 Setting the record data to Type 3 Setting the record data to Type 3	94 95
Handling requests for news headlines Identifying news codes users can search for Identifying news codes users can search for	

Adjusting the update rate 97 Using throttling. 97 Configuring "bursts". 100 Configuring buffering 100 Returning news to clients. 101
Configuring write failure actions 102
Authentication and entitlement 103
Overview
Using auth modules103Specifying the Auth Module to use103Configuring user numbers105Waiting times for authentication105Reconnecting106
Liberator's standard auth modules106XMLauth106openauth107cfgauth107javaauth108
Signature authentication
Communicating with sources of data 110
What is a DataSource peer?
Configuring Liberator to be a DataSource peer
Connecting to DataSource peers
Reconnecting peers using the UDP interface
Data services 116 Specifying the object or objects 116 Specifying a single DataSource peer 117

Specifying alternative DataSource peers	17
Specifying multiple datasource peers	18
Specifying priority or failover	19
More complex mappings	20
Waiting for responses 12	20
Waiting for requests	21
Replaying data from peers into Liberator 12	21
Replaying news headlines	23
Making SSL connections with DataSources	23
Sample certificates and certificate authorities	24

Monitoring performance 126

Monitoring and management subsystem 126
Log files
Log file configuration
Log file cycling
System log files (syslog)
Logging crash details
The logcat utility
Examples
Status web page
Data source information
Object Browser
UDP commands
udpsend
Debugging
debug
Latency Measurement
Latency Measurements
End to End Latency
Optimising efficiency 143

3
3
4
5
5
5
6

Running Liberator with many users. 147

Configuring Liberator for a high number of users	147
Changing file descriptor limits—Linux	147
Per process	148
System-wide	148
Configuring the range of ports	148
Changing file descriptor limits—Solaris	149

Starting the demo feed—Linux and Solaris	150
Using an SSL connection for the demo feed	151
Viewing the examples on the website	151
Using SSL with the demonstration feed	151
Configuring the demonstration SSL connection	152

Appendix A: Configuration reference 154

Main		155
	application-root	155
	application-name	155
	event-log	155
	system-max-files	155
	runtime-user	155

catch-crash	. 155
include-file	. 156
pid-filename	. 156
license-file	. 156
syslog-facility	. 156
Logging	. 157
log-dir	. 157
log-maxsize	. 157
log-max-history	. 157
log-cycle-time	. 157
log-cycle-period	. 157
log-cycle-suffix	. 158
log-cycle-offset	. 158
debug-level	. 158
Advanced log file settings	. 160
add-log	
нттр	. 163
http-wwwroot	. 163
http-interface	. 163
http-port	
http-keepalive-max	. 163
http-keepalive-timeout	. 164
http-refuse-time	. 164
http-server-name	. 164
http-indexfile	. 164
http-rttp-content-type	. 164
http-def-content-type	. 164
http-err-content-type	
http-idx-content-type	. 165
http-access-log	. 165
http-error-log	. 165
add-authdir	. 165
direct-max-line-length	. 167
http-max-request-length	. 167

http-max-header-line-length	. 167
http-max-header-lines	. 167
http-max-body-length	. 167
http-connection-cookie-enable	. 167
http-connection-cookie-expires	. 168
RTTP	. 169
rttp-type5-js	. 169
rttp-type5-pad-length	. 169
rttp-type3-timeout	. 169
rttp-hostname	. 169
Enable HTTPS	. 170
https-enable	. 170
https-interface	. 170
https-port	. 170
https-certificate	. 170
https-privatekey	. 170
https-passwordfile	. 171
https-cipher-list	. 171
ssl-random-seed	. 171
ssl-engine-id	. 172
ssl-engine-flags	. 172
add-virtual-host	. 173
Direct connections.	. 174
direct-interface	. 174
direct-port	. 174
direct-refuse-time	. 174
Objects	. 175
object-throttle-times	. 175
object-throttle-default-level	. 175
object-throttle-off	. 175
active-discard-timeout	. 175
record-max-cache	. 175
add-object	. 175
default-type	. 178

é	add-type-mapping	178
	bbject-map	179
		179
	record-type1-clear-on-failover	179
		179
		179
	record-type2-hash-size	180
Auth mo	odules	181
é	auth-moddir	181
á	auth-module	181
r	nax-user-warn	181
r	nax-user-ok	181
r	max-user-limit	181
á	auth-login-timeout	182
á	auth-map-timeout	182
L	write-users-period	182
L	write-users-time	182
Session	IS	183
5	session-log	183
r	request-log	183
C	bbject-log	183
r	noauth-reconnect	183
S	session-timeout	183
S	session-reconnect-timeout	184
5	session-heartbeat	184
Clusteri	ng	185
C	cluster-index	185
C	cluster-cache-request-objects	185
C	cluster-cache-source-routing	185
C	cluster-addr	185
C	cluster-port	185
t	type1-host	185
t	type1-port	186
t	'ype2-url	186

cluster-cache-source-routing	36
priority	36
Fields	37
fields-file	37
add-field	37
requested-fields-only	38
numeric-locale	38
DataSource peers	39
datasrc-name	39
datasrc-id	39
datasrc-reject-new-peers	
datasrc-pkt-log	39
datasrc-interface	
datasrc-port	90
datasrc-sslport	90
datasrc-default-obj-hash-size	90
datasrc-rerequest-timeout	<i>90</i>
add-peer	<i>90</i>
start-ssl	<i>9</i> 5
ssl-passwordfile	98
Data replay	99
datasrc-auto-replay	99
datasrc-auto-replay-days	99
datasrc-auto-replay-files	99
Data services	0
New in version 4.0	-
The service name	-
The subject patterns	00
The source groups	00
Priorities	
Timeouts	00
service-request-timeout	
source-request-timeout	
cleanup-stale-timeout	

		001
		-
	datasrc-default-obj-hash-size	
	add-data-service	
	service-name	
	request-timeout	
	exclude-pattern	202
	include-pattern	203
	add-source-group	203
	required	
	retry-time	203
	add-priority	203
	label	203
	Default behaviour	205
	Conversion	205
	latency-chain-enable	208
	latency-chain-name	208
	latency-chain-init-ts-field	208
	latency-chain-list-event-field	208
	latency-chain-list-ts-field	208
	latency-chain-base64-mode	208
Tuning	9	210
	object-hash-size	
	user-hash-size	
	session-hash-size	
	session-max-queue-length	
	session-max-queue-count	
	burst-min	
	burst-max	
	burst-increment	211
	buf-cache-size	
	buf-elem-len.	
	output-queue-size	
	threads-num.	
	add-thread	

direc	ct-tcp-nodelay-off		212
http-	tcp-nodelay-off		213
data	src-tcp-nodelay-off		213
batc	h-discard-time		213
obje	ct-delete-batchtime		213
obje	ct-delete-time		213
News			214
news	sitems-saved		214
news	sitems-max		214
news	scode-max-length		214
news	scode-exceptions		214
add-	newscodes		214
news	scode-hash-size		215
news	s-purge-time		215
news	s-purge-days		215
news	s-datetime-format		215
news	scodes-valid-chars		215
news	s-log		215
news	s-replay		216
news	s-replay-days		216
news	s-replay-files		216
news	sitems-hash-size		216
KevMaster.			217
2	ature-validtime		
•	ature-hashsize		
-	sigkey		
	ICe		
	port		
	interface		
-	conf configuration		
	l-access		
	e-access		-
Cfgauth.cor	nf configuration	• •	221
add-	user		221

encrypted-passwords 223
Licencing
UUPP
Java Configuration 224
java-file
Java.conf configuration
jvm-location
jvm-global-classpath
add-javaclass
jvm-options
Monitoring configuration
monitor-plugin
add-monuser
log-monitor-level
session-monitoring-interval
object-monitoring-interval
Javaauth configuration
debug-level
javaauth-classid
Container configuration
container-request-timeout

Appendix B: Log file messages and formats ... 232

Session log
Session log messages
Session log format
Request log
Request log format
Object log 235
Object log format
Packet log

Packet log messages
Packet log format. 238 Packet log examples 238
HTTP access log
HTTP error log 240
Event log
Appendix C: Debug Levels and Messages 243
Appendix D: Javaauth configuration 244
Annendix F. Derfermense benchmark 246
Appendix E: Performance benchmark 246
Appendix E: Performance benchmark
Benchmark test methodology

1 Preface

1.1 What this document contains

This document describes the Liberator and its place in the Caplin real-time data architecture. It includes instructions on how to install and configure the Liberator and details some simple user authorising and object permissioning modules that are part of the installation.

It also includes a comprehensive listing of configuration options, debug messages, and example configuration files.

1.2 Who should read this document

This document is intended for people who need to install, configure and maintain the Liberator. Administrators are assumed to have a working knowledge of Solaris and Linux procedures.

1.3 Typographical conventions

This document uses the following typographical conventions to identify particular elements within the text.

Туре	Use
Arial Bold	Function names and methods.
	Other sections and chapters within this document.
Arial Italic	Parameter names and other variables.
Times Italic	File names, folders and directories.
Courier	Program output and code examples.
*	Information bullet point
•	Instruction

1.4 Acronyms and glossary

Please refer to the glossary available on Caplin's Client Portal at demo.caplin.com/clientportal for an explanation of common terms used in this guide.

1.5 Feedback

Customer feedback can only improve the quality of our product documentation, and we would welcome any comments, criticisms or suggestions you may have regarding this document.

Please email your thoughts to documentation@caplin.com.

1.6 Acknowledgments

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (*http://www.openssl.org/*)

This product also includes cryptographic software written by Eric Young (*eay@cryptsoft.com*) and Tim Hudson (*tjh@cryptsoft.com*).

2 Overview

2.1 What is the Liberator?

Liberator is a complete connectivity and subscription management system for streaming market data and trade messages over intranets, extranets and the Internet.

It is capable of handling up to tens of thousands of concurrent users. It handles both HTTP and RTTP traffic (please see What is RTTP? on page 77), but features a special high performance publishing engine capable of delivering hundreds of thousands of updates per second from a single server.

User permissioning and usage monitoring can be carried out in a variety of ways, for example using Caplin's XML Auth module, which enables programmers to use XML to create their own permissioning structures and control the entitlement of objects held on the Liberator - please refer to Authentication and entitlement on page 103 for further details.

The Liberator supports many RTTP data types, including text fields, fixed-format pages and page updates, logical records and news headlines.

Caplin's Platform architecture Figure 2-1 below shows a simplified implementation diagram and highlights the Liberator.

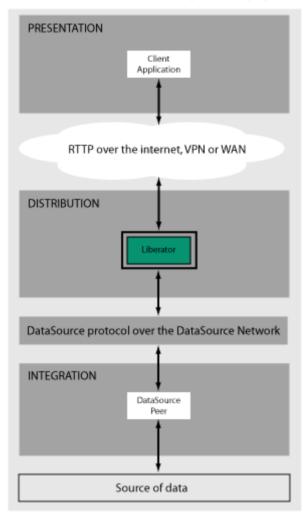


Figure 2-1: Liberator's place in Caplin's architectureInternal architecture

Figure 2-2 shows the components of an RTTP data source and Liberator and how they fit together. Contributing applications send market data to Liberator (see the section entitled Data sources on page 25). Liberator then aggregates the data and publishes it over the Internet using RTTP, where it can be integrated into web pages or custom applications.

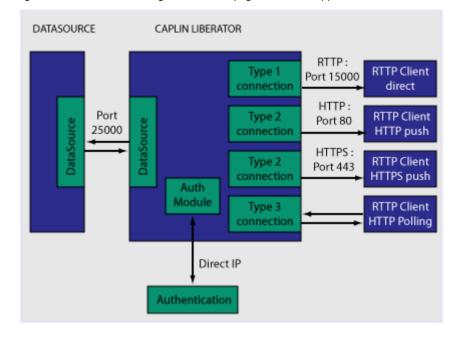


Figure 2-2: Liberator internal architecture

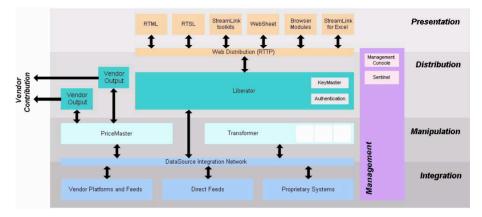


Figure 2-3 below shows a detailed illustration of Caplin's Platform architecture, including all the most common products, showing Liberator's position in the larger data distribution picture.

Figure 2-3: Caplin's architecture

2.2 What's new in version 4.2?

Version 4.2 of the Liberator platform incorporates several enhancements to the major new features added in 4.0:


- Monitoring enhanced ability to view the users, objects and peers involved in the platform using either JMX or a simple socket-based protocol - please refer to the section Monitoring and management subsystem on page 126 for further details.
- Data Services allow greater control over the prioritizing and failover of peers than was available in version 3.6 of the Liberator platform with the source mapping feature - please refer to the section Data services on page 200 for further details of how to specify this.
- Auto Directories allow clients subscribing to a directory to automatically be subscribed to all objects within it - please refer to the section Auto Subscription Directory on page 79 for further details.
- Containers allow clients to be automatically subscribed to an arbitrary collection of objects through references - please refer to the section Container on page 79 for further details.


- Intelligent Source Routing allows greater efficiency when using clustered Liberators. For example, if multiple Liberators are clustered and all require an object which exists on a certain data source, then the intelligent source routing functionality will ensure that only that one data source is serving up the objects and in only one update stream to all of the Liberators. Please refer to Clustering and intelligent source routing on page 41 for further details.
- Latency Measurement, enhanced ability to monitor and measure the latency of messages across the system and through to client applications. Please refer to Latency Measurement on page 139 for further details.

2.3 Architectural examples

Below are two examples of Liberator installations. There are many possible configurations that include more intricate load balancing, fault-tolerant and firewall protected environments.

Example 1—internal Figure 2-4 shows a simple internal network environment for redistributing real time data. The Liberator is connected to the Triarch network via Caplin's DataSource for Triarch feed handler.

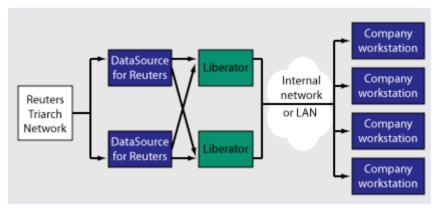




Example 2—Internet

network

Figure 2-5 shows a full Internet environment with two Liberators for load balancing and faulttolerance purposes. In this case both Liberators are receiving data from a DataSource handler

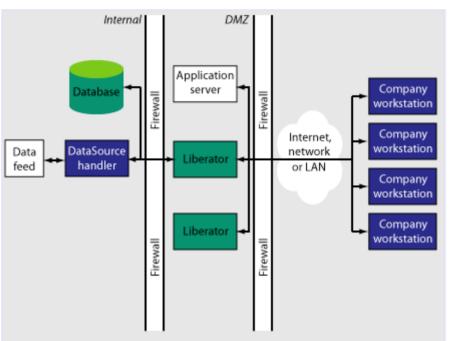

positioned on the other side of an internal firewall. This diagram also shows that the users are able to contribute data back to the data source via the liberator.

Figure 2-5: Liberator in a full Internet environment

2.4 Functions and features of the Liberator

Operational features

Publishing real-time data

Liberator reliably publishes data over the internet in real-time with very low latency. It is capable of publishing to tens of thousands of simultaneous users, employing a protocol called RTTP which tunnels through firewalls and proxy servers without their needing to be modified. It is also possible for users to contribute data back through Liberator to the source of the data.

■ For details about how RTTP works see About the data on page 77.

Clustering

Overview 22

Each Liberator can be configured as a node within a cluster, in order to share information about the number of licences, users logged on, and information about data and subscriptions.

For details on how to configure the Liberator see Running multiple Liberators from the same install location on page 40.

Global caching for clusters

When Liberator is configured as a cluster it can be set up to share information about users subscriptions. This allows each Liberator to request the object itself or know the best DataSource to request it from.

For details on how to configure global caching, see Running multiple Liberators from the same install location on page 40.

Multi-threading

Liberator is a multi-threaded application. It uses one main thread on the DataSource side, and a configurable number of threads on the client session side. This number should ideally match the number of CPUs on a multi-processor machine.

- For details on how to configure optimal threading, see Improving performance using threads on page 143.
- **Note:** (Linux only) As the Liberator uses a number of threads, one Liberator can be listed as a number of processes when you view a process status list.

Per-object configurable throttling

This allows directories (or specific objects) to be given throttle times. This is configured through the add-object interface.

■ For details on how to configure object throttling, see Using throttling on page 97.

Reconnecting clients

Update messages are stored in an output queue which can be resent when reconnecting to a client. This reduces the possibility that the server will not have any messages that the client missed while disconnected. The size of the output queue is configurable.

For details on how to configure output queues, see Configuring buffering on page 100.

Permissioning and security features

Authentication and permissioning modules

Liberator supports a modular system for handling authentication and authorisation. Each "Auth" module allows users to be authenticated, objects to have permissions loaded, a user's

read and write permissions for an object to be checked and object name mappings to be performed.

For details on how to use Auth modules, see Authentication and entitlement on page 103.

Content-based permissioning

Content-based permissioning works by allowing users to see an object only if the object contains a certain value in one of its fields. Your Liberator installation includes an Auth Module which uses XML to handle content permissioning information, or you can create your own modules using the associated development kit.

For details on how to permission objects based on content, see the companion documents XML Auth Module User Guide or Liberator Auth Module Developer's Guide.

HTTP authentication using Auth Modules

You can configure different HTTP directories with different realms for different users, and perform user authentication to allow access to the directory with an Auth Module.

For details on how to authenticate HTTP directories with an Auth Module, see add-authdir on page 165.

KeyMaster Integration

Liberator provides functionality to allow Auth Modules to use a KeyMaster generated encrypted signature as a password. This allows a client application to generate a signature based using a private key, which will then be verified by the Liberator to authenticate the user.

For details on KeyMaster, see the accompanying document KeyMaster 4.0 Administration Guide.

HTTP headers for authentication

A Liberator Auth Module has access to both the Cookie and the Authorization HTTP headers. This allows the Auth Module to work alongside or on top of an existing authentication system which utilises cookies or HTTP Authentication.

- For details on how to access HTTP headers, see the accompanying document Liberator Auth Module Developer's Guide.
- The Liberator web site The Liberator installation includes a local website, which serve as an introduction to the Liberator and enable you to:
 - monitor the usage of the Liberator, including the number of client sessions connected, and information about the DataSources

- view or download documentation for the Liberator and associated components
- view demonstration applications written using the SL4B SDK
- To open the Liberator web pages, point your browser at http://<hostname>:<port number> where <hostname> is the host name or IP address of the machine you have installed the Liberator on. For example http://liberator:8080.

For more information on the contents of the Liberator web site, see Status web page on page 133 and Liberator demonstrations on page 150

Restricting data Liberator enables you to offer users a restricted RTTP service in the following forms.

Delayed data

Delayed delivery of data can be configured for any non-active data source feeding the Liberator.

For more information regarding delaying data please refer to the DataSource supporting documentation.

Throttled data

Liberator can throttle different objects at different levels. Users can be mapped to these throttled objects seamlessly.

The timing of throttling in this way is per object, so if a user is looking at more than one object they will not all update at the same time. This can have a big impact on the loading of the Liberator, as it will be sending fewer updates at any given moment.

For more details on throttling objects, see Using throttling on page 97.

2.5 Liberator's data sources

Data sources

Liberator is capable of retrieving data from any application that uses the DataSource protocol, a protocol that enables most Caplin and RTTP-related products to communicate with each other.

The DataSource API handles data from a variety of sources, such as Triarch, RMDS, Comstock and TIB, please refer to the DataSource documentation for further details.

You can write your own data source application to connect to other DataSource applications using the DataSource SDK. A DataSource-enabled application can contribute any logical record, page update or other type of data by using a straightforward API.

The DataSource SDKs available include:

÷	DataSource	SDK for C	(Solaris,	Linux,	Windows)	;
---	------------	-----------	-----------	--------	----------	---

DataSource SDK for Java

The development kits include comprehensive sets of sample applications and demonstration files to illustrate the use of all aspects of DataSource functionality.

Please see the DataSource documentation for further details.

Data source features Support for SSL data sources

The Liberator is capable of communicating with its data sources over SSL, providing an encrypted channel over which the data sources can publish their data. Liberator can also use SSL for HTTPS.

For details on how to configure Liberator for SSL, see Enabling clients to connect using HTTPS on page 84.

Active data sources

An active data source is one that will keep track of which objects have been requested and send updates for those objects only. This improves performance by reducing network bandwidth requirements.

For details on how to use active data sources, see Data services on page 116.

Data services

This allows you to define which data source or set of data sources an active request for an object will be sent to. Regular expressions are used to match object names which are then sent to the relevant data source.

Each mapping can have many data sources defined—a group of data sources are regarded as one data source and requests will be sent to them in a round-robin fashion.

For details on how to implement active data services, see page 116.

Auto Replay

The Liberator's Auto Replay capability means that previously-sent data can be reprocessed by stepping through its log files and replaying the data on startup.

Auto Replay is useful following a period when Liberator was down, as replaying data can return you to the state immediately before the Liberator shutdown. Auto Replay is not necessary if you are using active sources, as the data will simply be requested again.

For details on how to implement auto replay, see Replaying data from peers into Liberator on page 121.

Message queues

If a data source loses its connection to the Liberator, messages will be queued until the connection can be reestablished. The queue is flushed when a reconnection is successful. The length of the queue is configurable on a per-peer basis.

For details on how to configure message queues, see datasrc-rerequest-timeout on page 190.

UDP command interface

The Liberator now includes a UDP command interface that enables you to send UDP messages from a utility to Liberator in order to reset peer connections after failover, and change the verbosity of log messages.

- For details of the UDP command interface, see UDP commands on page 136.
- For details on how to reset connections with UDP commands, see Reconnecting peers using the UDP interface on page 114.
- For details on how to adjust logging levels with UDP commands, see Debugging on page 137.

Data features Object sub-type mappings

Wildcard mappings can be configured to determine the sub-type of an object.

For details on configuring object type mappings, see add-type-mapping on page 178.

Configurable startup objects

Any number of objects can be configured to be created when Liberator starts. This configuration includes name, type, flags and source.

■ For details on how to configure startup objects, see add-object on page 175.

Purging of objects

Liberator can be configured to delete data held in cache at any time of day, on a per-object basis.

For details on how to configure Liberator purging, see add-object on page 175. The purging of news headlines is set using the news-purge-days on page 215 and news-purge-time on page 215.

News headlines and stories

Liberator can handle news objects, including news headlines and associated stories. Liberator offers complex filtering of headlines based on either headline text or codes.

For details on how to configure Liberator to handle news, see Handling requests for news headlines on page 96. For a description of RTTP news objects, see News headline and news story on page 79.

Type 2 and 3 record data

Liberator holds Type 2 (Level 2 quote data) and Type 3 (historic updates) for specially configured fields (see About RTTP fields on page 80). Data sources can control this store of data by sending flags to clear the cache or to filter out some entries based on the value of a particular field.

For details on how Liberator handles these data types, see Identifying the fields clients can request on page 94.

Record filtering

Liberator can accept requests for record objects with a user-defined filter—only updates matching the expression given by the user will be sent to that user. These expressions are based around the field values in the update and can contain most standard logical and relational operators (NOT, OR, AND, equals, greater than, etc). For example, a user might specify that they only want to receive updates when the Volume field is greater than a certain amount.

Record filtering is implemented by client applications. Please refer to relevant documentation for details.

Object name mapping

Liberator allows the configuration of object name mappings. Object mapping changes the internal name of an object when a user requests it. These mappings are global, but you can insert the username as part of the map. The user will be unaware of the new name which is only known by Liberator and its DataSources.

This functionality was previously only available within Auth Modules, but has been extended so that Liberator can perform the mappings where necessary.

For details on how to configure object name mappings, see Configuring objects on page 89 and auth_map_object in the companion document Liberator Auth Module Developer's Guide.

News headlines

As well as serving up cached headlines previously broadcast to Liberator, Liberator can actively collect historic news using a suitably-configured DataSource such as DataSource for HNAS. This enables clients to request news from a certain date without being limited by Liberator's cache size.

For details on how to configure active news headlines, see the document **DataSource for HNAS** Administrator's Guide.

3 Getting started

3.1 Installing Liberator

Introduction	The standard install procedure described below shows how to install Liberator in a flexible way to allow easy changes in the future.
Conventions and Assumptions	In the following procedure, (and in Caplin installation guides generally), symbolic links are used to point to physical files. This allows multiple configurations of the software to be used at the same time and also means that changing from one version to another is fast and simple. The usage of the link command is:
	In -s TargetFileName AliasFileName
	or
	In -s TargetDirectoryName AliasDirectoryName
	The -s option makes the link a symbolic one rather than a hard one. The TargetFileName is the name of the file that is to be linked to and the AliasFileName is the name by which the file should be known.
	This guide assumes that an appropriate license has been requested from Caplin to allow usage of multiple Liberators (if required) or to allow the Liberator to run for more than the default 30 minutes. Requests can be made to Caplin Support (support@caplin.com).
	It will also be assumed that the Liberator will be installed to <i>/apps/caplin</i> . This path will be referred to as <i>\$INSTALL_DIR</i> . All paths given below will be relative to <i>/apps/caplin</i> i.e. <i>/kits</i> actually refers to <i>/apps/caplin/kits</i> .
Step-by-Step Standard Install	1. Create the following directories:
	/kits/liberator This will contain the Liberator kit
	/liberator1 This will contain the symbolic links to the kit
	To create the directories inside \$INSTALL_DIR, enter the following from inside that directory:
	\$ mkdir -p kits/liberator \$ mkdir -p liberator1

Note: The p option creates parent directories if necessary.

2. Copy the liberator kit into the */kits/liberator* directory. The example below copies the kit from */tmp* into the */kits/liberator* directory:

\$ cp /tmp/Liberator-4.2.0-1-i686-pc-linux-gnu.tar.gz kits/liberator

- Note: Your kit will probably have a slightly different name.
- 3. The Liberator kit is a compressed tar file that will need to be uncompressed and untarred. From the *kits/liberator* directory type:

Linux

\$ tar xzf Liberator-4.2.0-1-i686-pc-linux-gnu.tar.gz

Solaris

```
$ uncompress Liberator-4.2.0-1-sparc-sun-solaris2.8.tar.Z
```

- \$ tar xf Liberator-4.2.0-1-sparc-sun-solaris2.8.tar
- 4. Now, whilst still within the *kits/liberator* directory, create the symbolic link which will make upgrading to new versions easier. Enter the following to create the link:

\$ ln -s Liberator-4.2.0-1 latest

Browsing to *latest*, should reveal the following directory structure:

Folder	Description
bin	Contains binary programs for the Liberator.
doc	Contains Liberator documents and example programs.
etc	Contains start-up scripts and configuration files for the Liberator.
htdocs	Contains the Liberator webpages.

include	Contains auth module development files and contains header files used to create custom auth modules.
lib	Contains auth libraries, modules and third party libraries.
users	Contains Liberator user statistics.
var	This directory will contain all Liberator log files.

5. Now set up an instance of Liberator by moving to the */liberator1* directory and creating symbolic links as shown below:

```
$ ln -s ../kits/liberator/latest/bin bin
$ ln -s ../kits/liberator/latest/doc doc
$ ln -s ../kits/liberator/latest/htdocs htdocs
$ ln -s ../kits/liberator/latest/lib lib
$ ln -s ../kits/liberator/latest/include include
$ cp -r ../kits/liberator/latest/etc etc
$ mkdir users
$ mkdir var
```

- **Note:** The *etc* directory does not have a symbolic link as it contains the config files that should not be overwritten by an upgrade.
- **Note:** The normal directory for containing the Liberator's start-up scripts and configuration files is \$INSTALL_DIR/etc; this is where the example configuration files in the install kit are located. However when the Liberator starts up it will first look for configuration files in its root directory \$INSTALL_DIR. If it finds a required configuration file in \$INSTALL_DIR (for example the main configuration file rttpd.conf), it will use that in preference to a file of the same name in the etc directory.

It is recommended that you do not put configuration files in *\$INSTALL_DIR*; always keep them in the etc directory. In particular. avoid keeping old or back up copies of configuration files in *\$INSTALL_DIR* (unless you rename them), since Liberator would then cease to respond to changes in the "live" versions of these files located in the etc directory.

Upgrading Liberator Periodically new versions of Liberator are released. The release can be due to feature enhancements or bug fixes. Using the setup detailed above greatly simplifies the upgrade

process. Repeat steps 2 to 4 above with the new Liberator kit to complete the upgrade. Once this has been completed, all instances of the Liberator will be upgraded to the new version.

used if https is enabled in the Liberator configuration.

3.2 Starting Liberator

Introduction	With the instance set up, configure the Liberator and the demo DataSource that ships with the Liberator to confirm that the Liberator is working and can successfully connect to a data source.		
	Liberator receives data from DataSources. In this installation we are going to connect to an example DataSource called <i>demosrc</i> to prove the system is operating correctly. It is usually a good idea to perform this step in any install, but you could connect to a real source if you have one available.		
	This demo source can later be deleted and is not necessary for running the Liberator.		
Step-By-Step Start-up	1. Liberator is started with the start-up script $rttpd$ which can be found in the etc directory.		
	Edit this to change the variable LIBERATOR_ROOT to point to the root instance install directory (/liberator1). The extract below shows an example		
	<pre>if [-z "\$LIBERATOR_ROOT"]; then LIBERATOR_ROOT=/apps/caplin/liberator1 export LIBERATOR_ROOT fi</pre>		
	2. The Liberator has a number of ports that need to be defined. Please see below for details:		
	http-port	This is the port that listens for HTTP requests. The Liberator has an inbuilt webserver which hosts pages to check status info etc.	
	udp-port	This is the port which listens for UDP messages. UDP messages can be used to issue commands to the Liberator while it is running.	
	direct-port	This is the port which listens for direct (type1) RTTP connections.	
	datasrc-port	This is the port which listens for connections from DataSource peers.	
	https-port	This is the port used to listen for HTTPS connections. This is only	

In a production environment http-port and https-port would be set to 80 and 443 respectively. This is to allow this traffic to pass through an unmodified firewall and be accessible to external users. All the ports can be modified and set according to your requirements. An example config might be the following:

http-port	80
udp-port	12000
direct-port	15000
datasrc-port	25015
https-port	443

3. Now configure the Demo data source configuration file (*demosrc.conf*) to connect to the Liberator. To do this we must first edit the configuration in the Liberator configuration file (*rttpd.conf*) as shown below:

```
datasrc-port 25015
add-peer
remote-id 1
remote-name demosrc
label demosrc
end-peer
```

Now edit the *demosrc.conf* as shown in the example below:

```
datasrc-id 1
add-peer
port 25015
local-type none
end-peer
```

The datasrc-port (25015) set in *rttpd.conf* must be the same as port specified in *demosrc.conf*. Also note that the remote-id (1) specified in the add-peer section for the demo data source in *rttpd.conf* must be the same as the datasrc-id specified in *demosrc.conf*.

4. To run the Liberator for longer than the default 30 minutes install the new license you received from Caplin Support. Perform the following steps to install it:

1. Ensure the Liberator is not running. (Please refer to step 8 below for how to stop the Liberator).

- 2. Copy the new license to the *etc* directory.
- 3. Rename the license file to *license-rttpd.conf*.
- 4. Empty the contents of the users directory.
- 5. This is the basic configuration required to install the Liberator. Start the Liberator and demo data source by entering the following from inside the *etc* directory:
- \$./rttpd start
- \$./demosrc start

The order in which the Liberator and data source is started is not important, but it is good practice to start the Liberator first.

Automatic restart

Liberator can be configured to attempt to restart after an unexpected shutdown.

Edit the file etc/rttpd and change the value of LIBERATOR_START from start-noloop to start-loop.

6. To ensure the Liberator has started and connected to the demo data source open up Internet Explorer and browse to the status page:

http://hostname:8080 8080 is the http-port specified in the Liberator configuration file.

If the Liberator home page appears then the Liberator has started correctly. To check the demo data source has connected click 'Status'. You will be prompted for the following credentials:

Username: admin Password: admin This username and password is configurable in the Liberator configuration file.

An example status page is shown below:

			C/	APLI		era	tor	4.2
Home	Status	Docume	ntation	Exa	nples	Diagnost	tics Capli	n.com
	Status							
London office Caplin Systems Ltd Triton Court 14 FinSbury Square London EC2A 1BR info@caplin.com	Server Version: Applet Version: RTML Version: Company: Max Users: Max Sources: Explivy Date: Current Sersions: Peak Sessions: Number of Objects: <u>+ Server Breakdown</u>	4.2.0 4.0.5 4.0.5 caplin Unlimited Unlimited 1 1 40 Na Sta Last Char	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	osrc-test	5 53:48 5	0 0	0 0	

Figure 3-1: Example Liberator status page after initial step-by-step set up

The important part to note is the Data Sources section, which will tell us whether demosrc has status UP or DOWN. The usual cause of the status showing down is incorrect ports being specified in *demosrc.conf*.

 The Object Browsing Tool, which ships with the Liberator, can be used to request some data from the demo data source. Browse to Examples -> Object Browsing Tool and request /DEMO/MSFT.

Request Objects					
Enter Object: 🖡	/DEMO/MSFT		OK Car	ncel	
Object Type	Record				
Parent Dir	/DEMO				
Туре	211				
dFullName	Microsoft				
dTime	12:11	12:11	12:11	12:11	
dLast	56.510	53.963	52,473	53.340	
dNet.Chng	2.330	-0.217	-1.707	-0.840	
dVolumeAcc	16068000	16062000	16060000	16051000	
dBestBid	53.680	51.557			
dBestAsk	55.871	53.661			
SID	demosvc				

Figure 3-2: Object Browser Tool from the Examples page

A full list of available symbols is available within the demo data source configuration file (*demosrc.conf*).

- 8. To stop the Liberator and demo data source enter the following commands from inside the *etc* directory:
- \$./demosrc stop
- \$./rttpd stop

3.3 About your Liberator licence

Liberator licence details are contained in a system file called *licence-rttpd.conf*. This file can be found in the etc directory.

The file can contain several licences which simplifies deployment by enabling one file to control several installations.

If you need to change, upgrade or renew your licence agreement, this file will be forwarded to you by Caplin along with the appropriate installation instructions.

- Liberator licences can limit users to a maximum number of unique users per month. A unique user is an individual person. Liberator can either limit the number of unique users or create an audit log for billing purposes.
- When a number of Liberators are clustered (see page 40 for details on how to configure clusters), if the connection with one is lost, for a set time the remaining Liberators will not count the disconnected Liberator's users in relation to the total licence allowance.

After this period, the total number of permitted users will be reduced by an amount proportional to the failed Liberator's load. This proportion is calculated by assuming that the users are shared equally between Liberators.

The licence contains another timeout setting that determines how long this reduced user count will last, whether the failed Liberator reconnects or not, before the maximum number of users are permitted again.

3.4 Full secure set up on Linux and Solaris

If you want to use port 80, 443 or any other restricted port, or if your licence contains a MAC address entry, you will need to enter the following to unpack the Liberator kit as a normal user, then make the binaries start as root but run as an unprivileged user (cap-run).

Note: Locations may vary.

This is the preferred method for a production install. It means that only the log files are writable by the user which the process runs as, providing additional security.

1. Login as root.

2. Create two users.

```
# /usr/sbin/useradd -d /opt/caplin caplin
# /usr/sbin/useradd -d /opt/caplin -s /usr/bin/false cap-run
# mkdir -p /opt/caplin
# chown caplin /opt/caplin
# passwd caplin [enter a password twice as prompted]
```

- 3. Login as caplin.
- 4. Unpack Liberator

```
$ cd /opt/caplin
$ zcat /tmp/Liberator-4.0.0.1.tar.Z | tar xf -
$ ln -s Liberator-4.0.0.1 Liberator
```

- 5. Login as root.
- 6. Configure runtime user.

```
# cd /opt/caplin/Liberator
# chown cap-run var users
# vi etc/rttpd.conf [Uncomment the line runtime-user cap-run, save
and exit]
```

7. Configure run directory.

```
# vi etc/rttpd [Edit the LIBERATOR_ROOT line to point to /opt/
caplin/Liberator]
```

- 8. Configure ports and set any other required parameters.
- 9. Log in as root.

10. Start Liberator as root.

\$ etc/rttpd start

Liberator will start as root to allow it to open restricted ports, it will then change to run as 'caprun' which only has access to write to the *var* and *users* directories. This provides a secure sandbox for the application to run in.

3.5 Running multiple Liberators from the same install location

It is possible to run multiple instances of the Liberator from the same installation. You will need a license which allows this, and the Liberators will have to use different interfaces or ports in their configuration. This can be done using the standard Liberator startup script:

1. Create two links to the startup script *etc/rttpd*, eg

```
$ ln -s rttpd rttpd-one
$ ln -s rttpd rttpd-two
```

2. Create seperate configuration files, eg

\$ cp rttpd.conf rttpd-one.conf

- \$ cp rttpd.conf rttpd-two.conf
- 3. Make relevant changes to the configuration files. The things that will or may need changing are either ports or interfaces for the following:

```
http
direct
datasrc
udp
cluster
```

4. Using the new startup scripts the revelant config files will be used, eg

```
$ ./etc/rttpd-one start
```

\$./etc/rttpd-two start

Using this method the same binary (*bin/rttpd*) will be used, but you must use the convention of using the binary name as a prefix in the startup script links and the configuration files. It would be possible to use a name other than *rttpd*, but it would require you to rename or make links to the binary as well. In each case the startup script and the binary can be links to the original file, but the config files would need to be copies to allow changes to be made. The following table shows examples as an aid to understanding the startup script.

Startup Script	Binary it will start	Config file it will read
etc/rttpd	bin/rttpd	etc/rttpd.conf
etc/rttpd-one	bin/rttpd	etc/rttpd-one.conf
etc/lib1	bin/lib1	etc/lib1.conf
etc/lib-one	bin/lib	etc/lib-one.conf

3.6 Clustering and intelligent source routing

A cluster enables a group of Liberators to act as one, in order to monitor licence use and numbers of users logged on. Clients can also contribute data to a cluster, for example when using the chat facility. You can configure the cluster to use a global cache, which means on failover each clustered Liberator can provide data from the same cache without having to rerequest it from the data source.

Use the following parameters in the configuration file *rttpd.conf* to enable the clustering of multiple Liberators.

cluster-index	The index number of this cluster node. This states which of the add-cluster-node sections this node represents.
cluster-cache-request-objects	When this option is set to true all Liberators in a cluster will request an object when one of the Liberators requests it.
cluster-cache-source-routing	When this option is set to true the Liberators will share information about which DataSource it requested the object from.
add-cluster-node	Identifies all the Liberators in the cluster.

	 Make sure each Liberator identifies every node in the cluster, including itself. This list of nodes must be in the same order in each Liberator's configuration file.
	Make sure each Liberator in the cluster has a different cluster-index in its configuration file. Index numbers must start at 0 corresponding to the order of the 'add-cluster-node' entries.
Intelligent Source Routing	Enabling cluster cache source routing allows the other Liberators in the cluster to request the object from the same DataSource. This can have two advantages, firstly it minimises the load on the DataSources as they are not all serving up the same objects. and secondly it minimises the bandwidth used on the DataSource to Liberator network as each update is only sent by a single DataSource. This can be a significant advantage if the DataSources are connected to the Liberators over a WAN. For cluster cache source routing to work, all Liberators in the cluster must be configured in a compatible way. The source routing works based on the labels given to DataSource peers (see add-peer on page 190 and add-data-service on page 202), so each Liberator must use the same labels for the relevant DataSources.


3.7 Step-by-step examples


The following pages contain diagrammatic step-by-step examples of scenarios in which Liberator might be used and how it processes client requests for real-time data. Each example lists the major configuration options that must be set in the configuration file *rttpd.conf* in order to achieve the illustrated functionality.


The examples in this section show how Liberator fits into a real-time system with the following functionality:


Active requests Basic active request Two clients actively request same data Active request with DataSource failover Active requests for data from 2 sources	page 44 page 47 page 60 page 53
Passive source—broadcast data	page 56
Failover Liberator failover Liberator and DataSource failover	page 58 page 60
Requesting news Requesting news headlines Requesting historic news headlines Requesting news stories	page 63 page 67 page 65
Throttling updates	page 70
Authentication and authorisation of users using Auth Modules	page 72


Basic active request

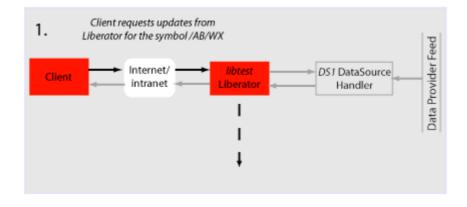


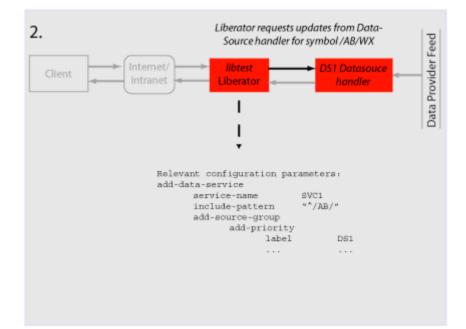


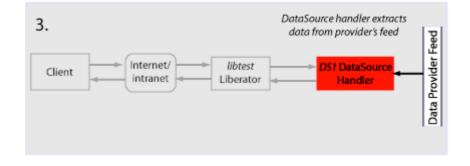

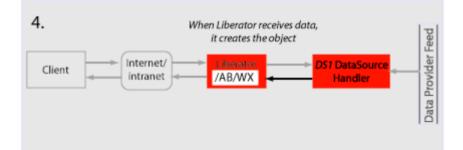


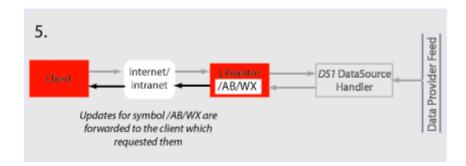


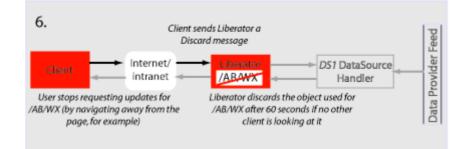


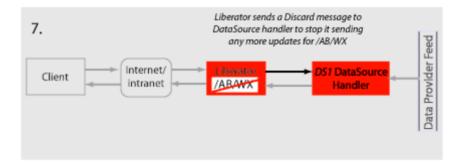



Two clients actively request same data

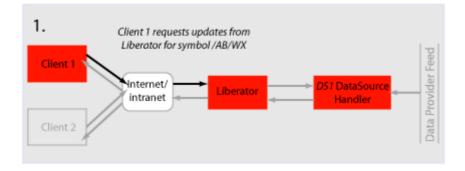

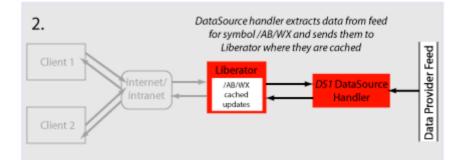


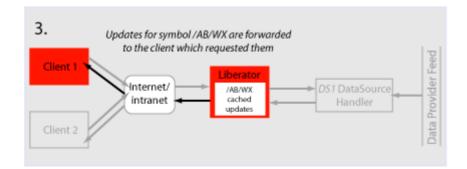


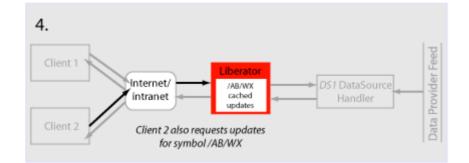


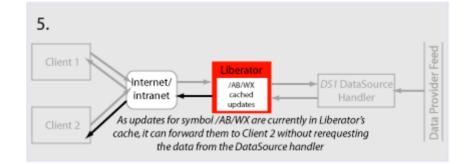



Active request with DataSource failover/load balancing

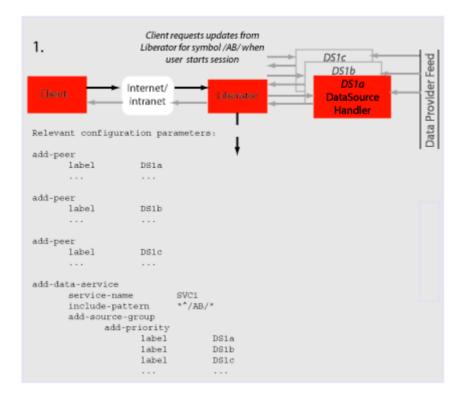


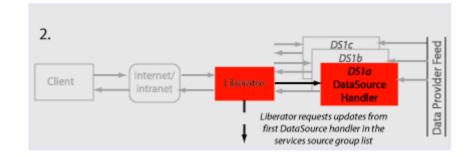


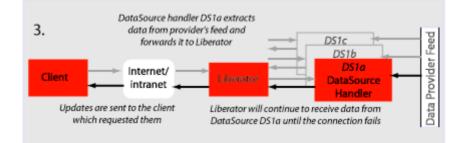


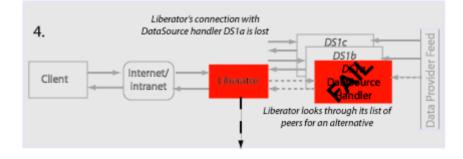


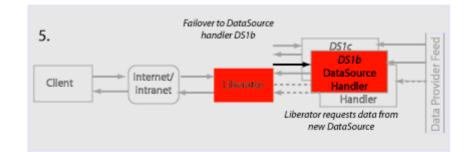


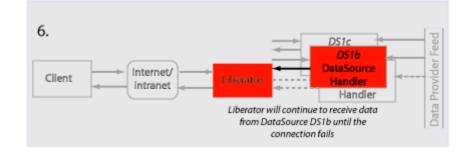

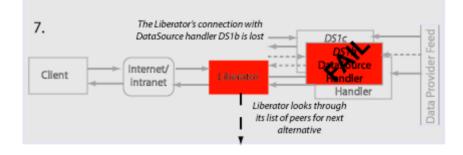


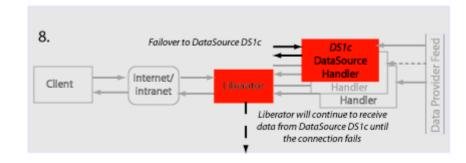


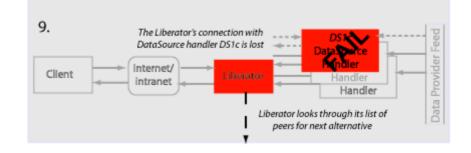


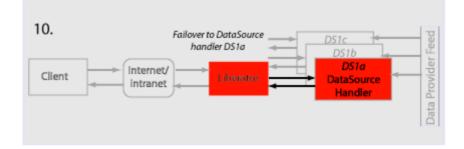


Active requests for data from 2 sources

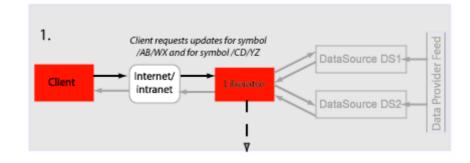


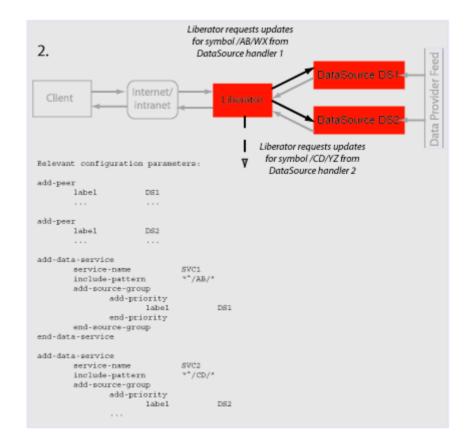


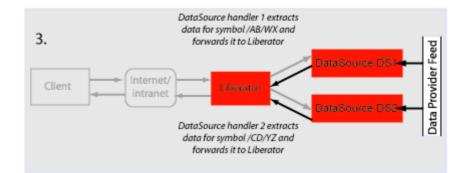


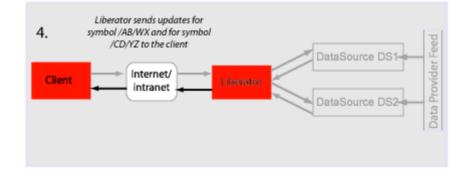



Passive source-broadcast data

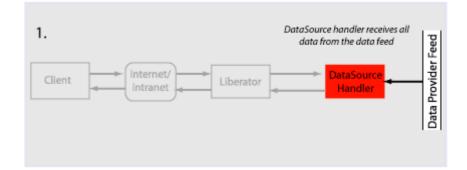


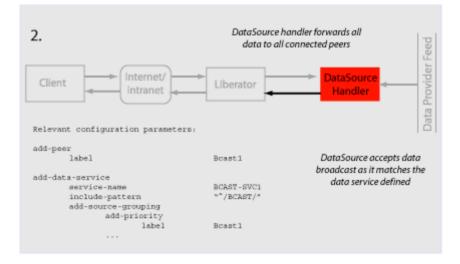


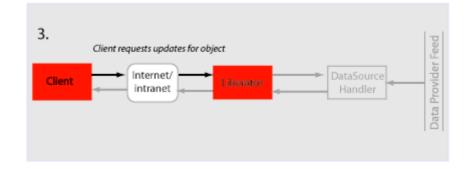


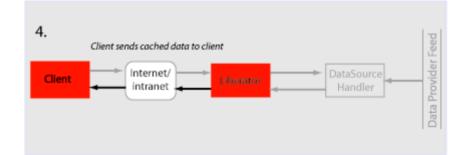


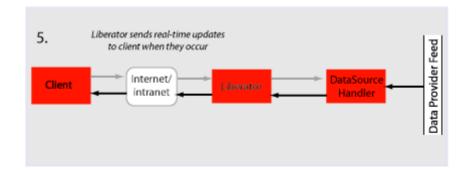

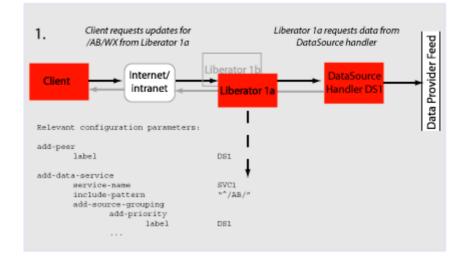

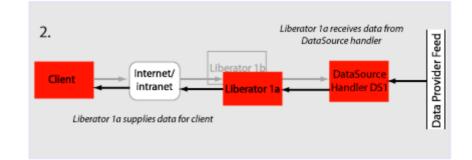


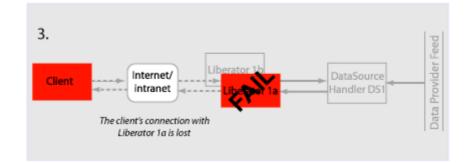


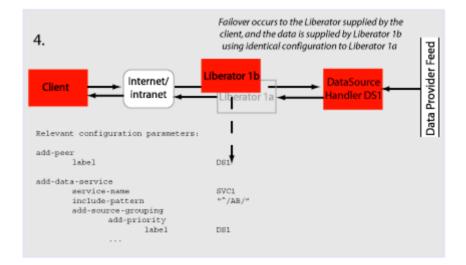


Liberator and DataSource failover	The following example assumes that the components are installed on different machines to provide extra resilience in case of failure:			
	Host A	Liberator 1a		
	Host B	Liberator 1b		
	Host C	DataSource 1a DataSource 1b		
	Host D	DataSource 1c		

DataSource 1d

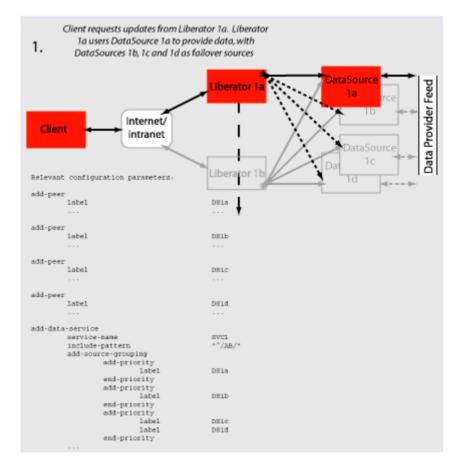


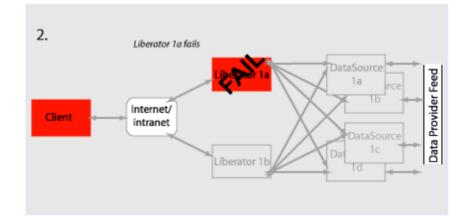


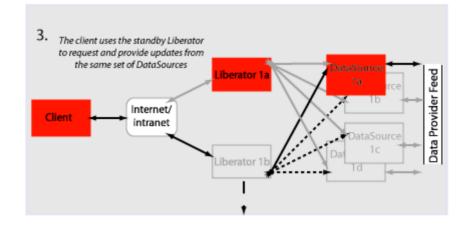



Requesting news headlines


News headlines are delivered to Liberator as a broadcast feed—see page 56.

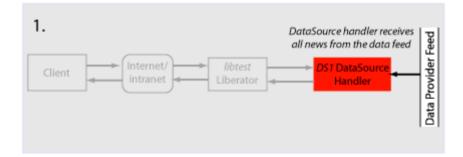

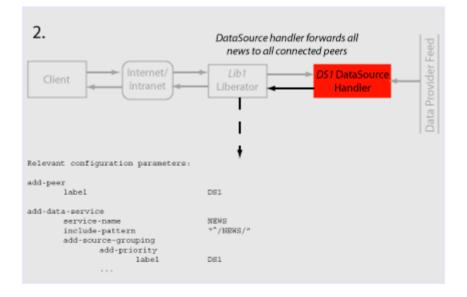


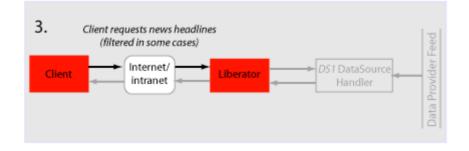


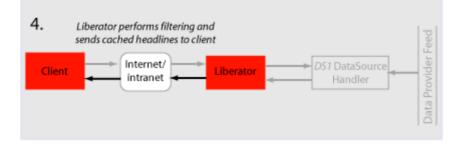


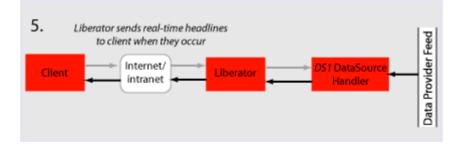


Requesting news stories

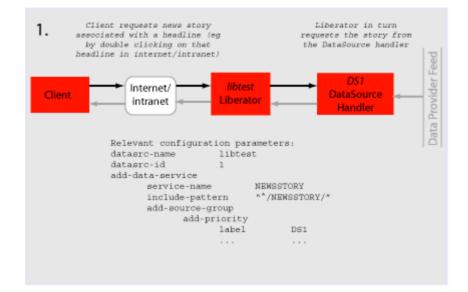


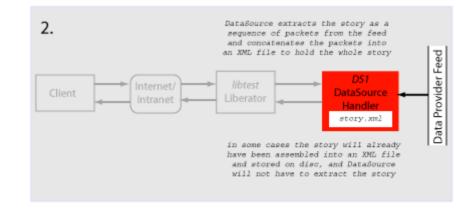


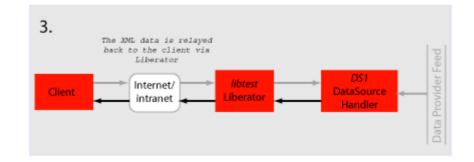


Requesting historic news headlines The following steps take place after Liberator has supplied all its cached real-time headlines— see page 63.

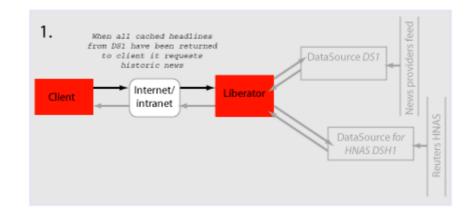


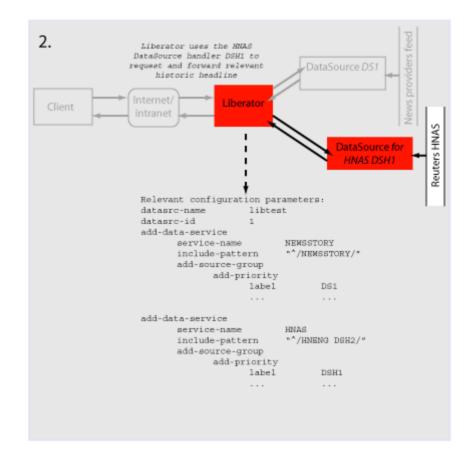


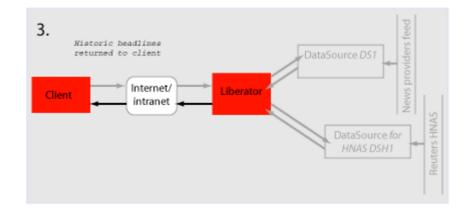


Throttling updates

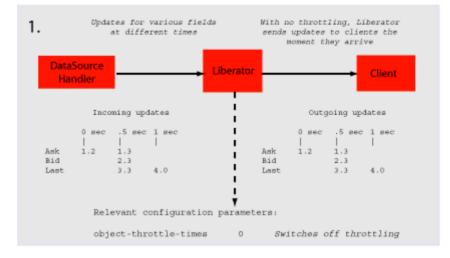


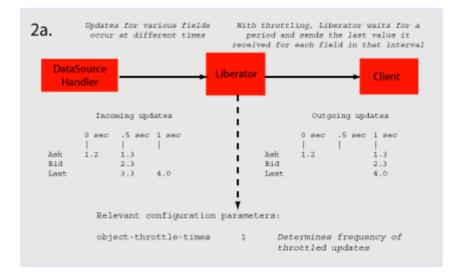


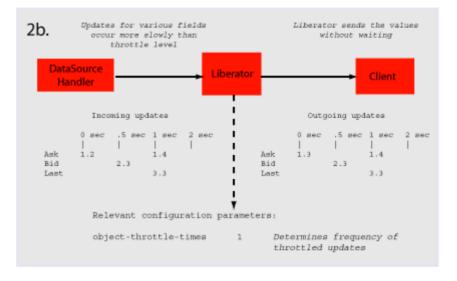



Authentication and authorisation of users using Auth Modules

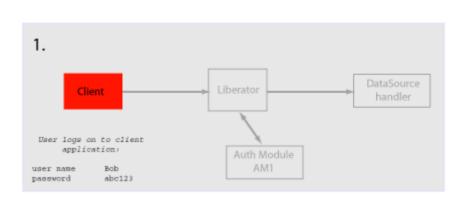


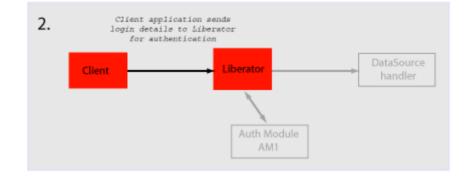


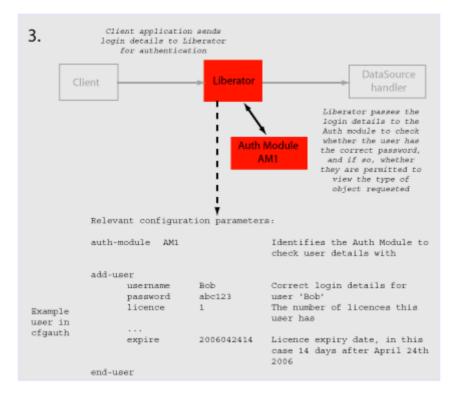


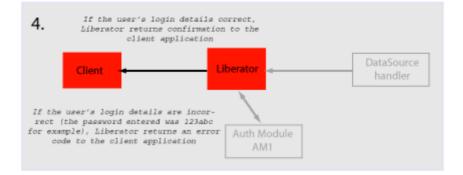

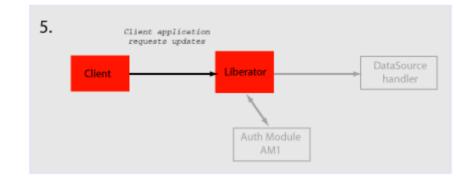

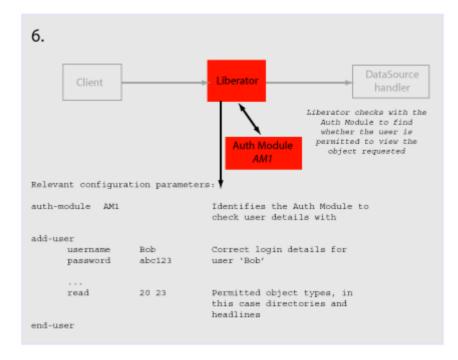

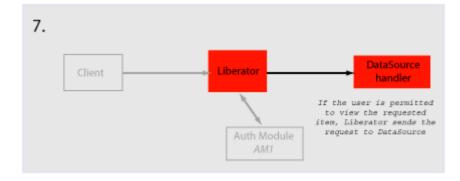

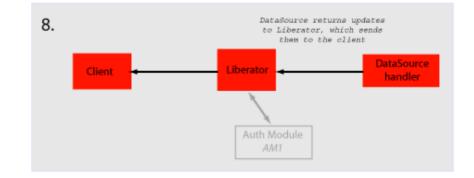

4 About the data

4.1 What is RTTP?

RTTP (Real Time Text Protocol) is a protocol developed by Caplin Systems that implements advanced real-time streaming for almost all types of textual information, including logical records, news and free-format pages. RTTP has been used by financial institutions for mission-critical data since mid-1997.

RTTP is an object-oriented server-push protocol for the distribution of streaming market data over internet-protocol networks. It supports both client-server and peer-to-peer publish/ subscribe models.

RTTP builds on the functional experience of historic market data protocols, but removes many of the restrictions inherent in these protocols whilst taking advantage of advances in objectedoriented techniques and internet concepts. It can reliably publish to thousands of simultaneous users over the public internet and can also be used as a simple point-to-point protocol over a LAN.

The need to be able to communicate without hindrance across the whole of the internet along with the need to support sophisticated event-driven server-side technology have been the two primary driving forces behind the evolution of RTTP. It supports the widest range of market data instruments and activities, by providing a comprehensive set of standard data types as built-in objects, allowing user customisation of these, and finally permitting completely user-defined objects. This design philosophy has allowed RTTP to become a ready-to-use mechanism for Internet delivery with the capacity to mature over time.

RTTP ensures high data quality irrespective of most network obstacles using persistent virtual connections with smart/secure tunnelling and data health checking.

4.2 Key features of RTTP

Smart tunnelling

Web browsers are able to make HTTP connections over the internet because the proxy servers and firewalls which separate them from the web servers are specifically designed to pass on HTTP. Special protocols such as RTTP are normally not recognised by these proxy servers and firewalls, which have to be specially modified to let them pass.

Liberator avoids this problem by intelligently detecting the presence of such obstacles and employing the RTTP Smart Tunnelling technology where necessary to tunnel through them in a safe and secure manner.

Persistent Virtual Connection (PVC)	The PVC mechanism allows the Liberator to maintain a continuous virtual connection to every client irrespective of the activity of the Tunnelling Engine and transient loss of the actual connection.
	In the event that a client connection is prematurely terminated (because of excessive packet loss or a proxy timeout, for example) the client RTTP layer immediately reopens the session. Liberator uses a unique session identifier to resume the previous RTTP session with no loss of context. If the delay in reconnection is excessive, this is automatically signalled to the client via the Data Health Check mechanism.
Data Status	In the event of a physical network failure, a link in the chain may fail and that updates intended for a particular client may be delayed, or may not arrive at all. In such circumstances, it is essential that the client is alerted instantly to the fact that the data may be stale.
	Liberator and DataSources keep track of the status of all data objects amd signal to the client if an object may contain stale data. Heartbeats between Client and Liberator, and between Liberator and DataSources can be configured so loss of connections can always be handled even when the operating system does not close the connection.
	Please see Monitoring system health using heartbeats on page 135 for further details.

4.3 About RTTP objects

Throughout this document you will find references to "RTTP objects". There are several types of RTTP object, and each type is identified by a two digit number, as described in Table 4-1.

Object Type	Description
20	Directory
21	Page
22	Record
23	News headline
24	News story
27	Chat object
28	Container object
29	Auto Subscription Directory

Table 4-1: Object types

Directory	A directory is both an object and a container for other objects. Directories can be used as a means of organising information into groups and hierarchies. Users of data streamed on RTTP can subscribe to a directory and receive updates when objects are created or deleted within that directory.	
Page	A page is a free format piece of text made up of rows. RTTP supports any size of page up to 128 rows of 256 characters (typical sizes are 14 rows of 64 characters and 25 rows of 80 characters).	
Record	A record (or "logical record") is a means of storing and displaying information. Records are composed of fields which may not be of the same type: for example, a record containing equity data could have several price fields (e.g. the last traded prices) together with time and date fields, whereas an index record would have a price field but no bid or ask values.	
	For more information on fields, see About RTTP fields on page 80.	
News headline and news story	Generally, news stories do not get streamed on RTTP since these do not benefit from being real- time enabled. The news headline, however, must be RTTP-enabled, so that if the user wants to read the story they can select that particular news item and use a more standard subscription mechanism to request the story.	
	A request for a news headline object may contain a filter string which allows a client to limit the updates it receives based on a simple logical syntax.	
Chat objects	RTTP chat objects allow users logged into Liberator to chat in real-time. Each chat object represents a virtual chat room for 2 or more users.	
	To send a message to the channel, users contribute to chat objects.	
Container	Container objects store references to other objects. A client requesting a container object will receive both changes to the container object (called structure updates), and will also be automatically subscribed to any objects that are held in the container.	
	As item references are added or removed from a container object, subscribed clients will receive notification of the structure changes and will automatically request or discard the relevant objects.	
Auto Subscription Directory	This is a specialised directory object that allows the subscriber to the directory to be automatically subscribed to all of the contents of the directory, in a manner similar to the container object.	
	When combined with a filter, all objects within the directory will be subscribed to with the filter. This applies to both record and news filtering.	

Auto Subscription Directories also provide the option to monitor filtering, which allows a client to distinguish easily between an infrequently updating record and a record for which many updates have been filtered out. As records' field values transit from: either matching to not matching; or not matching to matching the filter, a notification is sent.

- **Symbols and parameters** Most real time data handled by RTTP is identified by combinations of symbols and parameters. The symbol is stored as the name of an object on the Liberator.
 - A symbol is a letter or sequence of letters used to identify a security. Symbols should always start with a "/". For example, "/DCX" is used for Daimler Chrysler Corporation, "/LO/VOD" for Vodafone trading on the London Stock Exchange, and "/MSFT" for Microsoft.

The symbol you choose depends on the "symbology" being used by the data source. If you are running your own Liberator, this will by default be the same as the symbology of the data source to which it is connected. If you are using a third-party RTTP source, you should obtain a symbol directory from its owner.

 A parameter is a certain piece of information relating to the symbol. Typical parameters are "Bid" (the bid price), "Ask" (the asking price) or "Cls" (for the previous day's closing price).

The range of parameters available for a particular financial instrument also depends on the data source to which you are connected.

4.4 About RTTP fields

The Liberator uses fields to represent data within an object. Standard record objects are simply made up of a set of fields. Examples of these types are Bid (the bid price), Ask (the ask price), Time (Time of the last trade in seconds) and Currency (the currency in which the price is quoted).

Data comes into the Liberator via the DataSource protocol, which uses field numbers to identify fields. However, data sent to RTTP clients over the Internet uses field names to identify fields.

Record objects are probably the most important and widely used in RTTP due to the simple generic nature of the "symbol" container and "field" structure. However, within the market data arena it is important to be able to provide specific functionality to help address the needs of particular client applications and displays. This has brought about the need for a subclassification of record field data, which is illustrated in the following pages.

Type 1 data

The majority of record based data is considered to be Type 1. This means that there is only one level of fields under the main container. Figure 4-1 shows an example field structure for a simple full quote display for the IBM stock on NYSE.

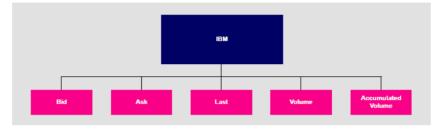


Figure 4-1: Example of Type 1 data within a record

Here, the single container IBM has one level of five fields, Bid, Ask, Last, Volume and Accumulated Volume. Whenever an update comes in to the Liberator for any of these fields the value is over-written. A user newly subscribing to IBM would then see this new value; the previous value would not be available.

 Type 2 data
 Type 2 data is often referred to as "level 2" data, as it is mostly used for level 2 quote data. Level 2 quote data enables several price quotes per symbol (coming from different market makers or traders) to be available at all times.

The field structure shown in Figure 4-2 might be applicable for a simple level 2 display for IBM, where there are three or more active market makers.

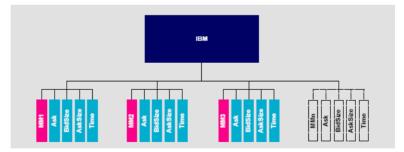


Figure 4-2: Example of Type 2 data within a record

In this case the IBM container (primary key) has a secondary key of Market Maker. This allows a new subscriber to see the full set of quotes in the market by enabling them to view each set of quotes from each market maker.

A quote update in this example will always have a market maker associated with it, causing only a specific sub-set of fields to be overwritten.

Type 3 dataType 3 data allows for the storage of update history by keeping all updates of this type and not
overwriting the symbol/field pair. A common use for Type 3 record data is for holding and viewing
daily trade activity where, typically, this mechanism will only be used for a day at a time before
the cache is deleted and the update list starts again.

Figure 4-3 shows a Type 3 field structure, which is similar to a Type 1 field structure but with many instances.

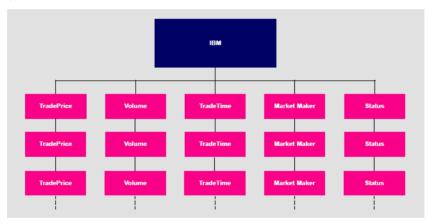


Figure 4-3: Example of Type 3 data within a record

Each new update is placed as the first (most recent) item on the list. Subscribers would receive the whole list as part of the initial subscribe response. The size and purging frequency of this list is configurable separately to the size and purging frequency of the fields themselves.

5 Communicating with clients

5.1 Enabling clients to connect using RTTP (over HTTP)

Specifying the Liberator URL	Liberator can write information regarding clients accessing it using HTTP to a log file. For more information on this and other logging facilities, see Monitoring performance on page 126	
	Use the following parameters in the configuration file <i>rttpd.conf</i> to enable clients to connect to Liberator using RTTP over HTTP connections.	
	C	Space-separated list of interface IP addresses to listen on for HTTP connections. See page 170
	rı 4 s	Network port to listen for HTTP connections. When the Liberator is unning in production, this should usually be set to port 80 for HTTP or 143 for HTTPS. The Liberator will have to be started as 'root' on UNIX systems to allow binding to port 80. See page 163
	tł tł	Configures the interfaces and ports settings for additional threads. add- hread entries are optional, and the default values will be used for those hreads that do not have an associated add-thread entry. See page 212
Configuring the HTTP Keep Alive feature	Use the following parameters in the configuration file <i>rttpd.conf</i> to enable the HTTP Keep Alive feature.	
	http-keepalive-max	Number of requests per connection. See page 163
	http-keepalive-timec	Dut Timeout in seconds of HTTP Keep Alive connections. See page 164
Using cookies to aid HTTP connection	Liberator can use cookies to indicate which RTTP & MIME type was used to successfully connect, so that on subsequent attempts the client knows which connection type to try first.	

Use the following parameters in the configuration file *rttpd.conf* to enable Liberator to save cookies on client machines.

http-connection-cookie-enable	If set, the server will set a cookie in the client when the client connects over HTTP. See page 167
http-connection-cookie-expires	Number of days before the cookie expires. See page 168

5.2 Enabling clients to connect using HTTPS

Making an HTTPS connection	The Secure Sockets Layer (SSL) is a commonly-used protocol for managing the security of a message transmission on the Internet, and offers a greater level of protection than standard HTTP transmission.	
	Liberator can run as an HTTPS web server like most common web servers. Liberator is also capable of communicating with its data sources over SSL, providing an encrypted channel over which the data sources can publish their data.	
	Liberator can run as an HTTPS server. Web pages, Java applets and other standard HTTP traffic can be sent over HTTPS. If the RTTP Applet is downloaded over HTTPS then all RTTP data will be over an HTTPS connection too.	
	Liberator supports standard SSL server-side certificates to authenticate the server to the client. They must be generated and signed by a certificate authority.	
	Use the following parameter in the configuration file <i>rttpd.conf</i> to enable clients to connect using HTTPS.	
	Using HTTPS—Linux and Solaris	
	https-enable This option switches on support for HTTPS connections. See page 170	
Virtual hosting	Virtual hosts allow a single Liberator to serve independent websites.	
	Note: Each virtual host is based on the IP address the client connects to and not HTTP 1.1 name-based virtual hosts.	
	There are two things that can be configured as virtual hosts:	

- the directory to use as the root directory for the website;
- the SSL certificates to use for HTTPS connections.
- Use the following parameter to use a virtual host.
- add-virtual-host Identifies a virtual host that Liberator will serve. If a client connects via an ip address identified by add-virtual-host it will use the options configured. Any other IP addresses will use the global options.

Example:

add-virtual-host		
name	service2	
addr	192.168.123.123	
wwwroot	/Liberator/service2/docs	
https-certificate	cert2.pem	
https-privatekey	cert2.pem	
https-passwordfile	rttpd_ssl.https.service2.pass	
end-virtual-host		

Configuring the HTTPSTo setup Liberator to use HTTPS you can use the test certificate provided for the SSL sample
configuration (etc/certs/rttpd.pem and rttpd.key). For more information on the Using SSL with
the demonstration feed on page 167.

This certificate requires a pass phrase which is contained in the file identified by *https*passwordfile. You will find the necessary configuration option commented out at the end of *rttpd.conf*.

- Use the following parameters in the file *rttpd.conf* to configure the HTTPS connection.
- https-interface Configures the network interface to listen on for HTTPS connections. See page 170

	https-port	Configures which network port to listen on for HTTPS connections. See page 170
	ssl-random-seed	Configures the seeding of the OpenSSL random number generator, which the Liberator uses for session IDs and HTTPS and DataSource SSL connections. See page 171
		On Linux OpenSSL is seeded by a hardware device so using ssl- random-seed may be unnecessary.
	Example:	
	https-interfa	ce 192.168.150.150 192.168.150.151
	ssl-random-se ssl-random-se	ed builtin ed file etc/randomdata
		ed file etc/randomdata 1024 ed exec etc/random.sh
	ssl-random-se	ed exec etc/random.sh 512
Applying the security policy	 Use the following be used. 	ng parameters in the file <i>rttpd.conf</i> to determine how SSL certificates are to
	https-certificate	Filename of the SSL certificate. This file should be in PEM format. See page 170
	https-privatekey	Filename of the SSL private key. This file should be in PEM format. See page 170
		filename for the private by is the same as the certificate because both the nd the private key can be contained in the same file.
	https-passwordfile	This option identifies the file containing the SSL certificate passphrase. See page 171

Sample certificates and certificate authorities	The sample HTTPS configuration uses certificates and certificate authorities which are already set up in the Liberator kit in the directories <i>etc/certs</i> and <i>etc/demosrcCA</i> . These were created using the OpenSSL toolkit (for more information see www.openssl.org).		
	even tho	• • • •	you will need to tell your browser to accept the certificate nise the authority and the certificate is not for that server. n a real certificate.
	The certificate and certificate authority use the following passphrase:		
	Liberator certificate: rttpdcert		
	present a passw	ord prompt will be given ord into the application	ssphrases in the file <i>etc/.rttpd.https.pass</i> . If this file is not ven when the Liberator starts. It is therefore possible to on on startup: to achieve this the standard startup script
Configuring hardware devices	OpenSSL has built-in support for cryptographic acceleration. In newer versions of OpenSSL an application can get a reference to a specific representation, often a hardware device. These representations are referred to as Engines.		
	■ Use the following parameters in the file <i>rttpd.conf</i> to configure SSL hardware.		
	ssl-engine-id	The SSL hardware o See page 172	or software engine to support.

The hardware and software engines that the Liberator supports are listed in Table 5-1 below. If you are using a different engine please contact Caplin.

ssl-engine-id option	Engine
openssl	The engine uses the normal built-in software functions
аер	Uses the Aep acceleration hardware
atalla	Uses the Compaq Atalla acceleration hardware
chil	Uses the nCipher CHIL acceleration hardware
cswift	Uses the CryptoSwift acceleration hardware

	nuron	Uses the Nuron acceleration hardware
	ubsec	Uses the Broadcom uBSec acceleration hardware
	sureware	Uses the SureWare acceleration hardware
		Table 5-1: Supported hardware and software engines
ssl-engine-flags Flags to be passed to the See page 172		Flags to be passed to the engine implementation. See page 172

The available flags to use are listed in Table 5-2 below. These flags may be ORed together using the "|" operator to represent multiple flags: for example "dsa|rsa" equates to using only DSA and RSA operations.

Flag	Description
dh	Limit engine usage to only DH operations
dsa	Limit engine usage to only DSA operations
rand	Limit engine usage to only random operations
rsa	Limit engine usage to only RSA operations
all	Allow OpenSSL to use any of the above implementations

Table 5-2: ssl-engine-flags flags

5.3 Enabling clients to connect using RTTP (direct connection)

RTTP direct connection is also known as a type 1 connection. The RTTP protocol is described in more detail in the chapter entitled About the data on page 77.

Use the following parameters in the configuration file *rttpd.conf* to enable clients to connect to Liberator using an RTTP direct connection.

direct-interface	Network interfaces to listen for RTTP connections. See page 174.
direct-port	Network port to listen for RTTP connections. See page 174.
add-thread	Configures the interfaces and ports settings for additional threads. add- thread entries are optional, and the default values will be used for those threads that do not have an associated add-thread entry. See page 212.

5.4 Configuring objects

It is possible to configure certain objects and directories that will be created on startup. This may be to make sure they are there before a broadcast source alerts updating the object, or to configure throttling for all objects in a directory.

	Use the follo up.	wing parameter in the file <i>rttpd.conf</i> to identify any object to be created on start-
	add-object	Identifies an object that a client can request. This configuration option can also specify throttle times that are specific to this object, and override any global values that have been set. See page 175
	object-map	Defines an object mapping. Object mapping changes the internal name of an object when a user requests it. This allows a username to be included in the object name in order for each user to get a unique object. For example if a user called 'userX' requests /HN/NEWSSTORY/1234, the object could be mapped to /HN/NEWSSTORY/userX/1234. See page 179 Example:
		object-map "/MYCHANNELS/%1" "/CHANNELS/%u/%1" object-map "/ABC/%1/%2" "/DEF/%2/%1"
		where %u is the username and %1 and %2 are strings to be matched in the pattern. Each object-map entry can identify up to 9 strings (%1 to %9).
	default-type	Sets the default sub-type parameter for all objects. See page 178
	add-type- mapping	Adds a sub-type mapping, which changes the sub-type of an object when a user requests it. You can have any number of entries. Object names are matched in the order given. Asterisk "*" is used as a wildcard character. See page 178
Purging objects	•	ies enable you to specify different purging times for different objects (purging e object from the Liberator's cache). These are configured using the following n add-object:
	The examples be	elow show how these options can be used to configure object purging.
	purge-time	Number of minutes after midnight on Sunday to start purging.

purge-period	Number of minutes between purges.
purge-age	A multiplier on purge-period. Defines how old an object should be before it is purged.

Purging example 1

Given the following add-object entry, Liberator will recursively purge all objects under /I/CHARTS at 2am on Monday morning, unless someone is looking at them:

```
add-object

name /I/CHARTS

type 20

throttle-times 0

purge-time 120

purge-period 1440

end-object
```

- If purge-time = 0 and purge-period = 1440, purging would at midnight every day.
- If purge-time = 180 and purge-period = 720, purging would occur at 3am and 3pm every day.
- If purge-time = 0 and purge-period = 60, purging would occur every hour.

Purging example 2

Given the following add-object entry, Liberator will purge all objects under /l/CHARTS at midnight, unless someone is looking at them:

```
add-object

name /I/CHARTS

type 20

throttle-times 0

purge-time 0

purge-period 1440

purge-age 0

end-object
```

If purge-age = 1, only objects which had not been updated for 1440 minutes (1 day) would be purged.

- If purge-age = 7, only objects which had not been updated for a week would be purged.
- If purge-period = 60 (i.e. purging every hour) and purge-age = 6, only objects 6 hours old would get purged.

Purging example 3

This example shows how to configure a weekly purge at 2am every Sunday morning.

add-object				
name	/DIR1			
type	20			
purge-time	8760			
purge-period	10080			
end-object				

Sending only changed fields

This feature makes the Liberator compare each update received from it's DataSources with the previous update for a given symbol. If any of the fields are the same as previously received, those fields are not sent out to the client. If no fields have changed in an update, no message will be sent to the client

Where there are many fields that are infrequently updated, the size of the message transferred to client is reduced. This feature might require increased server resources and may not be suitable where there the majority of fields are frequently updated.

This feature applies to record types (including type 2 records) only.

The Liberator can be configured so that all updates to a certain symbol are processed, or so that every update to a symbol in that directory and below are processed. This feature can alternatively be implemented directly in a custom datasource (please refer to the DataSource SDK Documentation).

Use the following parameters within the add-object to configure sending only changed fields.

only-changed-fields Configures an object to only forward the changed fields in an update.

Sending only changed fields example 1

A single object can be configured with this option

```
add-object
name /B/Object1
type 22
only-changed-fields
end-object
```

Sending only changed fields example 2

A whole directory and it's descendants can be configured with this option

```
add-object
name /A
type 20
only-changed-fields
end-object
```

5.5 Identifying the fields clients can request

- Use the following parameters in the file *rttpd.conf* to identify any field that might be requested.
- add-field Defines which fields can be used within the Liberator. It configures the field name and field number, as well as setting various flags which can customise the characteristics of the field before being sent to clients. See page 187
 - Flags are used for:
 - a) setting the number of decimal places;

b) setting the data to be Type 2 or Type 3 (for an explanation of Type 2 and Type 3 data types, see About RTTP fields on page 80).

You can configure multiple field numbers to be translated to the same field name if necessary, but not vice versa.

fields-file Name of a file containing configuration for fields, to be used as an alternative to those listed in *rttpd.conf*. This file can contain a list of add-field entries and list all required fields, so that Liberator can read in the fields on startup in order to gain an up-to-date list without its own configuration being changed. See page 187

Setting the number of decimal places If the FieldFlags parameter of the add-field entry is set to 256, it can be used to define how many decimal places the value of a field should have. When this flag is set, a fourth argument to add-field is needed to set the number of decimal places. This fourth argument is FieldFlagsData—see page 187

- Set the FieldFlags parameter of add-field to 256
- Set the FieldFlagsData parameter of add-field to the required number of decimal places

	For example:						
	add-field	Last	6	256	3		
	This would make	e all upda	tes to	the Last	field be formatt	ed to 3 decimal place	es.
Setting the record data to Type 2	means a record	can conta	in a s	et of field	ds for each uniq	sing a second index (ue value of a specific pased arrangement u	ed field, giving a two
						used as a Type 2 in a Type 2 update sho	
	■ Set <i>FieldFlags</i> to 1 or 2						
	For example:						

add-field	MarketMaker	212	3
add-field	Bid	22	2
add-field	Ask	25	2

Note: Record Type 2 updates must contain the Type 2 index as the first field in the update.

With the above configuration a record object could contain the following data:

MarketMaker	Bid	Ask
AA	123	125
BB	122	124
сс	123	126

If an update then came in with MarketMaker=BB Bid=121 Ask=125 it would replace the values in the BB row.

Use the following parameter in the configuration file *rttpd.conf* to improve the caching of Type 2 data.
 record-type2-hash-size Size of hashtable which holds Type 2 data. See page 180
 Setting the record data to Type 3 data keeps updates as sets of fields in a similar way to Type 2 data; however, updates are not replaced but added to the list. Updates are discarded when the number of updates reaches a configured limit.
 Type 3 data is more analagous to trade history updates. Fields with Bit 4 set in FieldFlags are defined as Type 3 data.
 Set *FieldFlags* to 3 or 4

For example:

add-field TradePrice64add-field TradeTime3794add-field TradeVol1784

Use the following parameter in the configuration file *rttpd.conf* to set the number of Type 3 records Liberator will keep in cache.

record-max-cache Maximum number of type 3 record data to keep. See page 175

5.6 Handling requests for news headlines

A client can request updates from news streams, and set certain filtering criteria using special codes for topics such as industries or countries.

Identifying news codes users can search for	■ Use the following parameters in the configuration file <i>rttpd.conf</i> to identify valid codes that clients can use as filters.				
	add-newscodes	If there are permissible exceptions to newscode-max-length, this parameter should include an array of codes listing the permitted exceptions. See page 214			
	newscodes-valid-chars	A list of characters that are valid in a news code. The default of "/." means a news code can be any uppercase characters and the characters "/" or "." (for example "FIN" or "BT.L"). See page 215			
	newscode-max-length	Users can request news stories by either sending a code (for example "AFN" is African Domestic News Service; "BASK" is basketball and "CHE" will return chemical industry stories) or by entering a search string. Liberator identifies the request as being a search string rather than a code if it is over a certain length.			
		newscode-max-length determines the maximum length of a news code. Anything longer is considered to be a search string, unless it has been identified as an exception using newscode- exceptions and add-newscodes. Only strings in upper case are considered to be codes. See page 214			
	newscode-exceptions	Boolean parameter that determines whether there are any exceptions to the newscode-max-length rule (i.e. whether there are any news codes that are longer than newscode-max-length). EUROPE, for example, is a news code, but is longer than the default maximum code length of 4, and would therefore need to be added to the exception list. If set to TRUE, list the exceptions in add-newscodes. See page 214			
	newscode-hash-size	Default number of entries in the newscode exceptions hashtable. See page 215			

5.7 Adjusting the update rate

Using throttling

Liberator can send updates every fraction of a second, but in most situations this is unnecessary and at times may overload the system. When this happens, Liberator can improve performance by using its throttling feature. This is sometimes known as conflation. This means that the

Liberator will wait to publish an update if it occurs less than a certain time after the previous update. This gives the Liberator a chance to publish all outstanding updates and let the system catch up.

The Liberator can supply the same object to multiple users at different throttle levels. This provides per-object per user throttling instead of just per object. This allows users viewing lots of objects, with slow network connections to the server or on low specification computers to receive data at a speed that suits their environment.

A user application can change the level of throttling for specified objects, groups of objects or all objects globally. Each object has a set of throttle levels which defines the time delay of the throttling. This set can include special cases which represent no throttling and also a stopped state in which the user will receive no updates until it asks for them.

For example an object may have five throttle levels:

- 1 no throttling
- 2 throttling at 0.5 seconds
- 3 throttling at 1 second
- 4 throttling at 2 seconds
- 5 the stopped state.

Your Liberator can have a default throttle level at which each object starts on login. This is typically the lowest level, but it could be set to one of the other levels. A user will start at the default throttling level when he logs in and requests objects, and may subsequently ask to go up or down a level, go to the minimum or maximum level, or stop or start updates.

■ Use the following parameters in the configuration file *rttpd.conf* to configure throttle levels.

object-throttle-timesAn array of throttle times in seconds.
See page 175Acceptable values are positive numbers, 0 and "stopped" or
"paused". Client applications select one of these throttle times by
choosing a throttle level; each level corresponds to an entry in the
array, with level 0 being the first, level 1 being the second and so on.Setting the level to "stopped" or "paused' means that clients are
allowed to pause objects, therefore receiving no updates until the
object is unpaused.Note:The array must be in ascending order of throttle times, and if
you use "stopped" or "paused" it must be the last entry in the
array.

Example:

object-throttle-times 0 0.5 1 2 3 4 stopped

This will result in all objects having a minimum setting of 0 seconds (no throttling) and a maximum of 4 seconds.

	object-throttle-default-level			s the throt	tle leve	el, not t	he thro	at on login. The value ottle time. The time of bject-throttle-times array.
		objec	the examp t-throttle- 1 0.5 1		ve: 3	4	stopped	
				le level 1 2	3	4	5	
			-		-	-	-	(the default level),
			throttli	ing will sta	rt at 0 s	second	s.	
	object-throttle-of	ff		the throttli age 175	ng cap	ability	off.	
Configuring "bursts"		The efficiency of the Liberator can be increased by writing user output in defined "bursts", c "batches". However, employing bursts can result in screen updates occurring in obvious pulses				•		
	 Adjust the follo level of both p 	0.1		0	uration	file rtt	pd.coi	<i>if</i> to achieve an acceptable
	burst-min	Starting poin See page 21		onds of clie	ent upd	ate bu	ffering	(i.e. start of burst).
	burst-max	Maximum tin has shown tl compromise See page 21	hat a bu betwee	rst-max of	0.5 se	conds	provid	g. Benchmark testing es the best
Configuring buffering	Adjusting the way read, and so contr	• •			•			speed at which the cache is

■ Use the following parameters in the configuration file *rttpd.conf* to set buffering levels.

	buf-cache-size	Overall size of the buffer cache in megabytes. On top of this the Liberator will use about 15Mb for core memory, and this memory requirement will increase as the amount of users and data increase. The suggested maximum is 512Mb. See page 211
	buf-elem-len	Length of standard buffer element, in bytes. See page 211
	output-queue-size	The number of update messages the Liberator will store per client (maximum is 4096). The main use for this parameter is when you reconnect, as Liberator stores any messages that might have been missed.
		The queue size could be increased if there are lots of reconnects or if your data updates fast and the queue fills quickly. See page 211
	newsitems-saved	Maximum number of news items (headlines) that Liberator stores in memory. See page 214
Returning news to clients	 Use the following para returns news headline 	ameters in the configuration file <i>rttpd.conf</i> to configure how Liberator as to clients.
	newsitems-max	Maximum number of news items that the Liberator will send to any particular client for any one request. See page 214
	news-datetime-format	The time string format used for news headline items (for further information please refer to strftime-within your Unix manual). See page 215
		Note: Some data sources may override this by sending their own datetime string.

5.8 Configuring write failure actions

If either the Liberator's output buffer is full or the RTTP client cannot read updates fast enough, updates for that client will fail. Liberator will continue to attempt to write to the client, using up system resources.

You can control this by adjusting how large the output queue can get before the Liberator stops trying to update that client and either kicks them out or checks its buffer.

Use the following parameters in the configuration file *rttpd.conf* to configure how Liberator will check for write failures.

session-max-queue-length	The size the queue in the server waiting to be sent to the client must reach before the server starts counting consecutive increases to the queue length. See page 210
session-max-queue-count	This is the number of consecutive times the queue length in the server has to increase after the session- max-queue-length has been reached before the connection is dropped. See page 210

6 Authentication and entitlement

6.1 Overview

Liberator supports a modular system for handling authentication of users and entitlement of objects. This allows users to be authenticated, objects to have permissions loaded, read and write permissions for a user to be checked and object name mappings to be performed.

- Authentication is the process of determining whether someone is who they say they are. In networks such as the Internet, authentication is commonly done through the use of logon passwords: knowledge of the password is assumed to guarantee that the user is authentic. The user must know and use the declared password.
- Authorisation or entitlement is the process of giving someone permission to do or have something. A system administrator defines which users are allowed access to which files. Authorisation is sometimes seen as both the preliminary setting up of permissions by a system administrator and the actual checking of the permission values that have been set up when a user is getting access.

For details on how to create your own Auth Modules, refer to the companion document Liberator Auth Module SDK Developer's Guide.

6.2 Using auth modules

An Auth Module provides a means performing authentication and authorisation.

Specifying the AuthUse the following parameters in the configuration file *rttpd.conf* to identify the location of
Auth Modules.

auth-moddir Directory from where authentication modules are loaded. See page 181

auth-module	Name of authentication module to use. See page 181
add-authdir	An HTTP-authenticated directory. Using HTTP authentication realms is a way of naming an area of the website. If a client tries to enter a different part of the site which is protected by the same realm they will be let in automatically, but you can configure different directories with different realms for different users. See page 165

Example:

add-authdir	
name	/status
realm	Liberator Admin
username	admin admin2
password	admin admin2
username	admin3
password	admin3
end-authdir	

In this example, the /status folder can only be used by people with the following login details:

Username	Password
admin	admin
admin2	admin2
admin3	admin3

Configuring user numbers	Use the following parameters in the configuration file <i>rttpd.conf</i> to configure the numbers of users allowed.	
	max-user-limit	Number of users allowed on the Liberator. This enables you to set a maximum at a level less than the licence allows if desired. The default setting of 0 means there is no limit. See page 181
	max-user-warn	Specifies the number of users at which a warning about the number of users approaching the maximum (set by max-user- limit) will be logged to the event log (see page 181). A warning will only be logged again if the number of users drops below the max-user-ok level. See page 181
	max-user-ok	Specifies the number of users at which a message confirming that the user level is acceptable will be logged to the event log. The default setting of 0 corresponds to 90% of max-user-warn. See page 181
		A message will only be logged if a warning about the number of users has previously been logged.
Vaiting times for uthentication	Use the following parameters in the configuration file <i>rttpd.conf</i> to configure how long Liberator should wait for a authenticated message from an Auth Module when there is a delay.	
	auth-login-timeout	Timeout period in seconds when logging in and auth_new_user returns AUTH_DELAYED, which means that there is no blocking while a database is accessed or any other other blocking call is made. (auth_new_user is a function in the Liberator Auth Module SDK which authenticates a user). See page 182

	auth-map-timeout	Timeout period in seconds when requesting a mapped object and auth_map_object returns AUTH_DELAYED (auth_map_object is a function in the Liberator Auth Module SDK used to deliver renamed objects to users without them seeing the new name). See page 182
	session-timeout	Sets the time in seconds for which the Liberator will maintain a session if a user has connected but not managed to log in. See page 183
Reconnecting	 By default, Liberator uses the Auth Module to check a user's authentication when they attempt to reconnect, but this functionality can be disabled. Use the following parameters in the configuration file <i>rttpd.conf</i> to configure how to authenticate users who are reconnecting to Liberator after a connection failure. 	
	noauth-reconnect	Set to TRUE for Liberator to compare the user's username and password with those used on the previous session and not request authentication from the Auth module. See page 183
	session-reconnect-ti	meout Sets the time the Liberator will maintain a session for after a disconnection, to enable the user to reconnect without a new authentication request being sent to the Auth module. See page 184

6.3 Liberator's standard auth modules

Liberator is equipped with three standard Auth Modules, openauth, cfgauth and xmlauth. Additionally, the javaauth module (which can be purchased seperately) allows the Liberator to connect to authentication modules which can be build using the java auth SDK.

 XMLauth
 This module enables programmers and system administrators to use XML to create their own permissioning structures and control entitlement to objects held on the Liberator.

As XMLauth is more complex than the other standard modules, there is an accompanying document XML Auth Module User Guide which must be referred to for instructions on how to use this module.

openauth	This is the simplest Auth Module possible and is used for systems where no authentication or authorisation is needed.			
	•	v any username to enter the system and with any password. It can also specify have either or both read and write access to any object in the system.		
	To use openauth:			
	Set auth-module to openauth (see Auth modules on page 181).			
	openauth uses its own configuration file <i>openauth.conf</i> to set the users' permissions. There are two configuration options in this file.			
	The default values	s for these options are used if no configuration file is present.		
	read-access	Determines all users' read access to objects. See page 220		
	write-access	Determines all users' permission to write to or create any object. See page 220		
	Example openauti	<i>h.conf</i> file		
	read-access write-access	1 1		
cfgauth	This module allow	s the number of users and the types of objects they can read to be configured.		
		tended for relatively low numbers of users where the usernames and other d to be changed often.		
	To use cfgauth:			

Set auth-module to cfgauth (see auth-module on page 181).

cfgauth uses its own configuration file *cfgauth.conf* to set up the users. There are two main configuration options in this file.

add-user	Identifies a user and their required password and permissions See page 221	s.
encrypted-passwords	A global option to determine whether a password is encrypted or not. See page 223	
	Note: This changes the way the passwords are read fro the configuration file, not the way they are transmitte across the network.	

Example cfgauth.conf file

encrypted-passwords	0
add-user	
username	userl
password	passl
read	0 20 21 22
licenses	2
end-user	

javaauth

This optional module allows the Liberator to connect to user defined authentication modules created using Caplin's java auth SDK - see Appendix D: Javaauth configuration on page 244 for details on how to configure **javaauth** to be able to connect to your module.

6.4 Signature authentication

Use the following parameters in the configuration file *rttpd.conf* to configure how to authenticate users' signatures.

signature-validtime How long a generated signature is valid for, in seconds. See page 217

signature-hashsize	Size of hashtable for storing signature keys. See page 217
add-sigkey	Adds a signature checking key to the configuration file. See page 217

These only come into play if an Auth Module is using Liberators signature checking system. Liberator can check signatures produced by the Caplin KeyMaster product, which integrates with single sign on systems.

7 Communicating with sources of data

The Liberator is capable of requesting and retrieving data from any application using the dataSource protocol which enables most Caplin and RTTP-related products to communicate with each other. These products are called DataSource peers.

7.1 What is a DataSource peer?

A DataSource peer is an application or feed handler, installed remotely, which another DataSource peer can receive data from and send to. Liberator incorporates a DataSource peer in order to request data from other DataSources and feeds.

As well as being a source of data, DataSource can act as a destination for data sent from other DataSource applications. This means the link between peers is bidirectional, as shown in Figure 7-1 below.

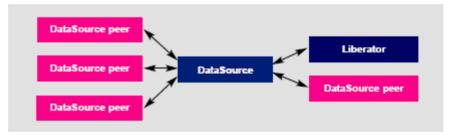


Figure 7-1: DataSource acting as a data source and data sink

There are two types of DataSource peer:

Active DataSources, which will accept requests for objects. Active sources keep track of which objects have been requested and send updates for those objects only.

Objects may be discarded as well as requested. This tells the source that we no longer wish to receive updates for this object.

When a user requests an object, and the Liberator does not already have it, it will request it from one or more of its active sources. If another user requests that object Caplin Liberator will already have all the information it needs, and will respond to the user immediately.

When a user logs out or discards an object, Liberator will send a discard message to the

active DataSource (as long as no other user is viewing that object). This discard will actually take place one minute after the user discarded the object: this is prevents objects being requested and discarded from the source unnecessarily.

Broadcast DataSources, which simply send all objects and updates to any connected peers.

7.2 Configuring Liberator to be a DataSource peer

You need to give Liberator an identifier in order for any connected peers to know which updates should be sent to it.

- Use the following parameters in the configuration file *rttpd.conf* to give a unique identifier for your Liberator.
- datasrc-name The name of the Liberator, and how DataSource peers will identify it. See page 189.

This name can be overridden by putting a value in the local-name option of the add-peer entry (see add-peer on page 190). %a represents the application name, %h the name of the host machine.

Example:

datasrc-name testsrchost8

datasrc-id ID number of this Liberator. See page 189

> This ID can be overridden by putting a value in the local-id option of the add-peer entry (see add-peer on page 190), in which case it must match the remote-id given in the add-peer entry in the remote DataSource's configuration.

7.3 Connecting to DataSource peers

Use the following parameters in the configuration file *rttpd.conf* to identify peers and configure how they connect.

	datasrc-interface	Network interfaces to listen for connections from DataSource peers. See page 189	
	datasrc-port	Network port to listen for connections from DataSource peers. The default of 0 means that no connections can be made to the Liberator. See page 190	
	datasrc-sslport	Network port to listen for SSL connections from DataSource peers. The default of 0 means that no SSL connections can be made to the Liberator. See page 190 and Making SSL connections with DataSources on page 123	
	add-peer	Identifies a DataSource peer which can be communicated with. This entry includes the ID number and name of the DataSource peer, and the ID number and name of Liberator, which is sent to the DataSource peer in order to identify your Liberator. See page 190	
Enabling failover	receive heartbeat s	peer is down when it loses its network connection to the peer or it fails to signals from that peer (heartbeats are explained in more detail in Monitoring g heartbeats on page 135).	
	The add-peer entries can be used to set up the Liberator to allow a data source failover and enable Liberator to connect to alternative data sources when required. A single add-peer section can configure a set of alternative peers to connect to using the addr and port options.		
		can be configured by commenting out all the add-peer options and using the default ngs with the exception of the following options:	
	S	nust have at least one data source identified to failover to. If more are specified, then the Liberator will try the first source, and if that fails too will try the second and so on.	
	port e	each data source identified in the addr option must have a port specified.	

Liberator will connect to the first addr and port in the list and failover to the others in order if it cannot connect to the preceding peer in the list. Having established a connection with another source, it will continue to request data from it until that connection fails and it attempts to connect to the other sources in order again.

The following example allows failover to 4 data sources; the Liberator will try each identified source in turn.

```
add-peer
addr 192.168.201.245 192.168.201.245 192.168.201.245
port 25110 25112 25112 25113
end-peer
```

New in Liberator 4.0, using Data Services, multiple peers can be configured for failover without Liberator needing to swap connections. Please see Data services on page 116.

- Use the following parameters in the configuration file *rttpd.conf* to determine whether Liberator ignores extra connection attempts by a user.
- datasrc-reject-new-peersIf a DataSource peer tries to connect to the Liberator but
there is already one connected with the same id (for
example, if a peer's firewall has been down and the peer
is registered as connected but in fact is not), the current
peer will be disconnected and the new one allowed to
connect.datasrc-reject-new-peers turns off this default behaviour
so the new DataSource peer is not allowed to connect.

See page 189

Use the following parameters in the configuration file *rttpd.conf* to configure the timing of heartbeats between peers.

heartbeat-time	Time in seconds between DataSource heartbeats. Peers compare their heartbeat-time values and all use the lowest. See page 195
heartbeat-slack-time	Time in seconds after a heartbeat has not been received before disconnecting and trying to reconnect (this value is not compared by peers). See page 195

Use the following parameters in the configuration file *rttpd.conf* to clear specific types of data when failing over to another peer or reconnecting to the same one.

This allows cached data to be refreshed from the new DataSource.

record-type1-clear-on-failover	Clear Type 1 data for active objects. See page 179
record-type2-clear-on-failover	Clear Type 2 data for active objects. See page 179
record-type3-clear-on-failover	Clear Type 3 data for active objects. See page 179

7.4 Reconnecting peers using the UDP interface

Liberator includes a UDP command interface that enables you to send a UDP message to reset peer connections after failover.

- Include the following options in the file *rttpd.conf* in order to use the UDP interface.
- udp-port
 Port to listen on for UDP messages. If not specified then udp signals are disabled.

 see page 219
 See page 219

 udp-interface
 Network interface to listen on for UDP messages.

 see page 219
 See page 219

The following UDP command can be sent over a Liberator's UDP interface.

peer-reconnect An instruction to attempt to reconnect with the specified peers. If several DataSource peers have been configured to be used as alternative or failover sources, this enables your application to reconnect to previously failed peers if they are now online. By default, the first failover address is reconnected to, if no number is given:

Syntax: peer-reconnect peers addr-num

Parameter:

Name	Туре	Descrip	Description	
peer	int		Datasource peer index which should be reconnected to after failover.	
		Note:	These are not DataSource IDs (specified by datasrc_id parameter in the configuration file), but correspond to the order of the peers' add-peer entries in the configuration file. The first add-peer is for peer 0, the next peer 1 and so on.	
addr-num	int		address in the failover list to reconnect to. s to the first in the list.	

■ For how to issue the UDP command, see the section UDP commands on page 136.

7.5 Data services

You must use Data Services in order for Liberator to request a particular object from a particular DataSource or to define where broadcast data can come from.

Data Services is the replacement to the old Source Mapping feature. Data Services allow an administrator to define where data comes from, based on its subject name. It also allows the definition of groups of peers in a way that allows priority, failover and load balancing.

A Data Service defines the following:

- a name, which is the identifier for the service;
- a regular expression pattern match on the object name, or a number of patterns this defines which objects will come from this service;
- a DataSource peer or set of peers that the request for the object will be forwarded to.

The datasouce peers defined for a service allow a number of different structures. Each service can have a number of 'source groups'. Within a source group a number of priority groups can be defined, and within those priority groups, lists of peers can be defined.

When an object needs to be requested from a service and Liberator first looks at the service groups, it will make a request to a peer from each group at the same time. This may be useful if you do not know which peer has the data, or if a peer is serving a different set of fields and the data needs to be merged together.

Within a source group Liberator will look at the first priority group and request from a peer in that priority - if there are multiple peers in the priority group Liberator will request from just one peer, keeping state so the next object will be requested from a different peer - this achieves load balancing across peers. If no peer is connected in that priority, or if the peers in that priority did not have that object the Liberator will try the next priority group - this achieves failover.

Active Data Services are identified within the Data Service section of the *rttpd.conf* configuration file. How these are configured is detailed in Data services on page 200.

Specifying the object or Examples of different applications of mappings are given below. **objects**

For example:

include-pattern "^/NA/"

	would request any object starting with the characters /NA/			
	include-pattern "^/[A-M]"			
	would request any object starting with the characters /A to /M			
	include-pattern "ABC"			
	would request any object containing "ABC" in any part of the name.			
	Note: Remember that this is a regular expression and should start with a "^" if the pattern should only match from the beginning of the object name.			
Specifying a single DataSource peer				
	For example:			
	add-data-service service-name include-pattern add-source-group	MyService ^/NA/		
	required add-priority	true		
	label end-priority	sic2		
	end-source-group end-data-service			
	would request any object starting with the	e characters /NA/ from the DataSource peer with ID sic2.		
Specifying alternative DataSource peers		of DataSource peers, you can ensure that no individual seful when a number of peers hold similar data.		
	Enter alternative DataSource peers wit page 200.)	thin the same priority group (See "Data services" on		

For example:

add-data-service			
service-name	MyService		
include-pattern	^/NA/		
add-source-group			
required	true		
add-priority			
label	srcl		
label	src2		
label	src3		
end-priority			
end-source-group			
end-data-service			

This means the first request that matches "^/NA/" will go to DataSource peer src1, the second to src2 and so on, wrapping round to DataSource peer 1 again, spreading the load evenly.

Specifying multiple datasource peers

To send the same request to more than one DataSource peer, enter more than one source group (See "Data services" on page 200.)

For example:

add-data-service		
service-name	MyService	
include-pattern	^/NA/	
add-source-group		
required	true	
add-priority		
label	srcl	
end-priority		
end-source-group		
add-source-group		
required	true	
add-priority		
label	src2	
end-priority		
end-source-group		
end-data-service		

This will mean any request starting "/NA/" will be sent to DataSource peer src1 and peer src2 at the same time.

Note: If both DataSource peers reply with data then the updates will be duplicated, so this configuration should not be used if both peers have the same data. This combination is more likely to be useful when you are not sure which peer has which data.

Specifying priority or failover You can configure a data service to send to an alternative Data Source peer if your first choice of peer is down, for example:

add-data-service	
service-name	MyService
include-pattern	^/NA/
add-source-group	
required	true
add-priority	
label	srcl
end-priority	
add-priority	
label	src2
end-priority	
end-source-group	
end-data-service	

This will only request from peer src2 if peer src1 is down.

More complex mappings More complex combinations of DataSource peers can be defined. For example: add-data-service service-name MyService include-pattern ^/NA/ add-source-group add-priority label src1 label src2 end-priority end-source-group add-source-group add-priority label src3 label src4 end-priority end-source-group end-data-service This results in the server sending requests to two DataSource peers simultaneously, one from src1 and src2 on a round robin basis, and one from src3 and src4 on a round robin basis. Waiting for responses Use the following parameter in the configuration file *rttpd.conf* to set the timeout period to wait for responses from a peer following a request for data. service-request-timeout Time in seconds that the Liberator will wait for a Service to answer a request-after this time the Liberator will send a discard to all peers that have not responded to request from another peer if the service defines a suitable alternative. A discard is sent to the datasource peer ro cancel the timed out request. This value can be overridden for an individual service by using the request-timeout option of the add-data-service

entry (see Data services on page 200).

	source-request-timeout	Time in seconds that the Liberator will wait for an individual DataSource to answer a request—after this time Liberator will attempt to request from another peer if the service defines a suitable alternative. A discard is sent to the datasource peer ro cancel the timed out request.
		This value can be overridden for an individual source by using the request-timeout option of the add-peer entry (see add-peer on page 190).
Waiting for requests	Use the following parameter in the configuration file <i>rttpd.conf</i> to set the timeout per for a request for data before discarding the data from Liberator's cache.	
	active-discard-timeout	Time in seconds that the Liberator will hold on to an active object after the last user stops viewing it. After this time Liberator will also send a discard instruction to the peer to cancel the request. See page 175.

7.6 Replaying data from peers into Liberator

The DataSource Auto Replay capability means that previously-sent data can be reprocessed by the Liberator stepping through its log files and replaying the data. Auto Replay is useful following a period when the Liberator was down, as replaying data can return it to the state immediately before it was shutdown.

Use the following parameters in the configuration file *rttpd.conf* to configure how Liberator replays data to clients.

datasrc-auto-replay	Time (in minutes after midnight) that the server should load previously received messages on a restart. If the number is negative it represents the number of minutes back from the current time. See page 199.
	Only peers with the recvautoreplay (4) flag set in the local- flags entry of add-peer will receive the Auto Replay data (see add-peer on page 190).
datasrc-auto-replay-days	The number of whole days to go back from the time indicated by datasrc-auto-replay (if less than 1440). See page 199.
datasrc-auto-replay-files	By default DataSource will only replay the current packet log. Use datasrc-auto-replay-files to specify a list of log files to replay. See page 199.
	If the files are specified without an absolute pathname, the order in which they will be searched for is: Liberator root directory the directory containing the current packet log the log root directory You must include the current packet log. The list of log files must be in order of age, with the oldest first.

Example:

datasrc-auto-replay-files packet-rttpd.old packet-rttpd.log

Replaying news headlines	 Use the following pa replays news to clien 	rameters in the configuration file <i>rttpd.conf</i> to configure how Liberator ts.
	news-replay	Time (in minutes after midnight) that the server should start replaying news headlines on a restart. If the number is negative it represents the number of minutes back from the current time. See page 216.
		You must give news-log a value to use news-replay.
	news-replay-days	The number of whole days to go back from the time indicated by news-replay (if less than 1440). See page 216.
	news-replay-files	An array of strings which identifies the news logs to replay. By default DataSource will only replay the current news log (as defined by news-log). See page 216.
		 If the files are specified without an absolute pathname, the order in which they will be searched for is: Liberator root directory the directory containing the current news-log the log root directory You must include the current news log. The list of log files must be in order of age, with the oldest first.

Example:

news-replay-files news.old news.log

7.7 Making SSL connections with DataSources

SSL certificates can be configured at either or both client and server ends of the channel— Liberator is said to be operating in server mode when accepting connections from DataSources, and in client mode when connecting to DataSources.

There is no fallback to non-SSL operation should the SSL connection fail to be established.

■ Edit the following parameter in the file *rttpd.conf* to configure SSL certificates.

start-sslConfigures the SSL connection when setting up Liberator to be both
client and server ends of an SSL channel. This group is needed in
the configuration file of both client and server applications.
See page 195.ssl-passwordfileIdentifies the file containing the SSL certificate passphrase.
See page 198.

Server mode only configuration

- To configure Liberator for SSL when in server mode, use the datasrc-sslport option to select the network port to listen for SSL connections from DataSource peers (see page 190).
- It is possible for DataSource to accept both SSL and non-SSL connections on different ports. Non-SSL connections should be configured using the datasrc-port option (see page 190).

Client mode only configuration

To configure Liberator for SSL when in client mode, use the ssl option in the add-peer entry for the DataSource peer that acts as server. For more information see add-peer on page 190.

Sample certificates and certificate authorities The sample SSL configuration found commented out in *rttpd.conf* uses certificates and certificate authorities which are already set up in the Liberator kit in the directories *etc/certs*, *etc/ demosrcCA* and *etc/rttpdCA*. These were created using the OpenSSL toolkit (for more information see *www.openssl.org*).

The certificates and certificate authorities use the following passphrases:

Liberator certificate:

rttpdcert

Demonstration feed certificate: demosrccert

Liberator certificate authority:	rttpdCA (you will need this if you create new data source certificates)
Demonstration feed certificate authority:	demosrcCA (you will need this if you create a new certificate for the Liberator.)

By default Liberator will look for passphrases in the files *etc/.rttpd.ssl.pass* and *etc/.demosrc.ssl.pass*. If these files are not present a password prompt will be given when the Liberator starts. It is therefore possible to echo the password into the application on startup: to achieve this the standard startup script should be changed.

8 Monitoring performance

The status of the Liberator can be monitored in three ways:

- by using the monitoring and management subsystem;
- by viewing the contents of log files;
- by viewing the status web page or the object browser.

8.1 Monitoring and management subsystem

Liberator supports monitoring and management via a plug-in system. This is an additional licensable feature. The monitoring subsystem allows the user to monitor many different aspects of the Liberator including the objects currently requested, the users that are currently connected and the peers that are configured. There are two monitoring plug-ins available:

- JMX Monitoring: Uses JMX (Java Management Extensions) to provide an interface to the monitoring subsystem. This module allows any standard JSR160 JMX client to access information and operations exposed by the system. The Caplin Enterprise console uses this JMX monitoring plug-in. There are also provided sample Java JMX command-line applications. A number of modifications to the configuration file are needed in order to enable JMX monitoring. These modifications are documented in the Enterprise Monitoring Console Getting Started Guide.
- Socket Monitoring : A simple command-based socket protocol, similar to ftp, that allows access to the information and operations exposed by the system.

Please refer to the **Management and Monitoring Overview** document which is provided with the Liberator kit for more details.

8.2 Log files

Liberator creates several log files when it runs. The format and content of messages written to the request log are described in **Appendix C: Log File Messages and Message Formats** starting on page 232.

- Log file configuration To view packet logs, you must use the logcat utility (see The logcat utility on page 131). Other logs are simple text.
 - Specify the directory where log files will be created using log-dir (see page 157)

Specify the names of each log file using the options listed in Table 8-1. These take the form [log type] [file location] [application name].log and will take the form [log type] [application name].log in the specified directory.

Log filenames can use the following abbreviations:

- ✤ %r can be used to represent application-root (see page 155)
- ✤ %a can be used to represent application-name (see page 155).

Log type	Configured by	Default	Contains
Event	event_log	event-rttpd.log	Messages about starting up, shutting down, and connections to data sources as well as extra general and debug information.
HTTP	http_access_log	http-access-rttpd.log	Each HTTP request to the server.
HTTP errors	http_error_log	http-error-rttpd.log	Each HTTP request resulting in an Object not found error.
Packet	datasrc-pkt-log	packet-rttpd.log	Each packet received from a data source.
RTTP Request	request-log	request-rttpd.log	Each RTTP request made to Liberator.
Session	session-log	session-rttpd.log	Messages re client connections, disconnections, logins and logouts.
Object	object-log	object-rttpd.log	All request and discard commands for objects, and whether those commands were successful.
News	news-log	[no default]	News headlines for replaying on startup.

Table 8-1: Configuring log files

Log file cycling By default all log files are cycled at 0400 each day and a separated log file created for each day. These default settings are specified using the following configuration options:

> log-maxsize 0 log-cycle-time 240 log-cycle-period 1440 log-cycle-suffix %u log-cycle-offset -1

Note: Often this default config can create large log files if your system has lots of fast moving data. It is useful to have as much log data as possible, but this config should be changed if the files are too big. Please contact Caplin Support if you would like advice about configuring your log files.

Use the following options in the configuration file *rttpd.conf* to set the same cycling format for all logs.

log-maxsize	A value of 0 means log files will cycle every time they are checked irrespective of size. See page 157
log-cycle-time	A value of 240 represents 0400 as it is defined as minutes from midnight. See page 157
log-cycle-period	A value of 1440 represents 24 hours as it is defined as minutes from midnight. See page 157

log-cycle-suffix	The default value of .%u appends the log filenames with a number between 1-7 for each day representing Monday to Sunday. The suffix is a format string which is passed to the system function 'strftime'— please refer to your operating system manuals for more information. See page 158
log-cycle-offset	A value of -1 means the offset is the same as log-cycle-period. When the log cycles at 0400 on Tuesday, the value passed to strftime will be 0400 on Monday, making timestamps in the filenames more meaningful. See page 158

Example log cycling configuration (all logs):

```
        log-maxsize
        1024000

        log-cycle-time
        0

        log-cycle-period
        30

        log-cycle-suffix
        .old

        log-cycle-offset
        -1
```

Results in each log file being checked every 30 minutes and moved to *logfile.old* if it is bigger than 1024000 bytes.

- Use the following parameter in the configuration file *rttpd.conf* to set different cycling formats for different logs.
- add-log-cycle Overrides the global settings and defines different cycling settings for individual log files. A possible application of this is to cycle the logs every night by default, but set the news log to cycle once a week, so you can replay the news log on startup and have a week's worth of news headlines available. See page 160

	Example log cyc	Example log cycling configuration (individual log):					
	add-log-cyd name time perio suffi end-log-cyd	od .x	event_log 240 10080 .old				
	Results in the ev	vent log	cycling once a week	at 0400.			
System log files (syslog)	Some important	log mes	ssages are also logge	ed to the syste	m log files.		
	Example system	n log me	essages:				
	Jan 1 12:00 Jan 2 12:00):00 1:):00 1:	ibl rttpd[9999]: ibl rttpd[9999]: ibl rttpd[9999]: ibl rttpd[9999]:	Logging t received	o /opt/Lib signal SIG	erator/var	
	The syslog priority used is LOG_INFO. The syslog facility used for log messages can be configured with the syslog-facility option. The default is "local6".						
	Refer to your op messages.	perating	system manual for ir	structions on	how to set up	syslog to receiv	/e these
Logging crash details	■ Use the following parameter in the configuration file <i>rttpd.conf</i> to log application crashes.						
	catch-crash	Liber applie	ean option which turn ator attempts to write cation has crashed. page 155	-			ie
			option should not be nated monitoring as i uced.			-	≀d for

Note: Applies to Linux and Solaris platforms only.

Note: This feature is not reliable as catching of segmentation faults and bus errors is not always possible.

8.3 The logcat utility

The **logcat** utility is needed to process the binary packet logs and can be used in the same way as the standard **cat** command. It can be found in the bin directory of the Liberator installation.

Argument Description -h, --help Detailed information on logcat options -v, --log-version the version of the log -i, --print-info The version, type and source of the given log -z, --timezone Sets all times in the log to the specified timezone. To find the required timezone look in the system folder zoneinfo, sometimes found at /usr/share/lib/ zoneinfo or /usr/share/zoneinfo. -t, --type Forces logcat to process a particular type of file. This takes an argument, currently only 'packet' is used. eg logcat -t packet mypacket.log.

The logcat utility can take the arguments listed in Table 8-2 below.

Table 8-2: logcat options

Examples

The command:

logcat -i packet-rttpd.log

outputs:

Logcat: Log Type 'packet' Version 4 created by 'rttpd' in timezone 'Europe/London'

The command:

logcat packet-rttpd.log

outputs:

```
Logcat: Log Type 'packet' Version 4 created by 'rttpd'
2005/08/22-16:46:52.528 +0100: 192.168.201.102 < PEERINFO 1
type2src-devsunl 0
2005/08/22-16:46:52.528 +0100: 192.168.201.102 > PEERINFO 0 rttpd-
devsun2 0
2005/08/22-16:47:00.000 +0100: 192.168.201.102 > SUBJREQ 1 1 /I/
VOD.L
2005/08/22-16:47:00.000 +0100: 192.168.201.102 > SUBJREQ 1 1 /I/BP.L
```

You can also use the tail command with logcat to display the last part of the log file and update the screen when more data appears.

Note: The timezone offset is that of the local machine that the logs were written on.

Example:

tail -f packet-rttpd.log | ../bin/logcat -t packet

To view very large packet logs it is possible to split the log into smaller files using the standard unix command 'split'.

split -b 10m packet.log

This will split a large packet log into separate files of 10Mb each.

Note: This command can produce a lot of files if you are not careful with the size parameter.

You must then tell logcat that each part is a packet log as the header will now be missing.

logcat -t packet packet-xab

8.4 Status web page

Liberator is supplied with a browser-based monitoring function that displays status information within a web page and enables you to monitor the usage of the Liberator, including the volumes of type 1, type 2 and type 3 data being processed.

Figure 8-1 shows a typical status web page.

			C/	APL		era	tor	4.	2
Home	Status	Docume	ntation	Exa	mples	Diagno	stics Cap	lin.com	
✓ London office Caplin Systems Ltd Mercury House Triton Court 14 Finsbury Square	Status Server Version:								
London EC2A 1BR	Applet Version: RTML Version:								
info@caplin.com	RTSL Version: Company: Max Users: Max Sources:	caplin Unlimited							
	Expiry Date:								
	Current Sessions: Peak Sessions:	-	0	1	0	0	0		
	Number of Objects:	-		-	0				
	+ Server Breakdown Data Services								
		Na	ime: der itus: OK	mosrc					
	Data Sources								
		Nan	ID: 1 ne: dem us: UP	iosrc-te	stlinu×1				
		Last Chan		30 16:	53:48				
	Figure 8	8-1: St	atus	web	page				

To view the status web page, point your browser at http://<hostname>:8080 (where <hostname> is the host name or IP address of the machine you have installed Liberator on) and click on Status.

The information contained on the status web page includes the following.

Liberator status information

	Server Version	Release number of this version of Liberator.
	Applet Version	Release number of this version of the RTTP Applet.
	RTML Version	Release number of this version of RTML.
	RTSL Version	Release number of this version of RTSL.
	Company	The name of the company on the licence agreement.
	Max Users	The maximum number of users who can be logged on to Liberator, as specified in your licence agreement.
	Max Sources	The maximum number of data sources which can be connected to Liberator, as specified in your licence agreement.
	Expiry Date	Date when your Liberator licence expires.
	Current Sessions	The number of user sessions currently active on the Liberator. The four columns correspond to total sessions and the number of sessions handling type 1, type 2 and type 3 data.
	Peak Sessions	The maximum number of user sessions permitted on the Liberator, as specified in your licence agreement. The four columns correspond to total sessions and the number of sessions handling type 1, type 2 and type 3 data.
	Number of objects	Total number of RTTP objects currently being handled.
Data source information		nn of information for each data source to which the Liberator is connected. s the following details:
	ID	Numerical identifier for the data source.
	Name	Name of the data source.
	I	Status of the connection to the data source. This can be either: UP if the connection has been established; DOWN if there was a connection, but it has been lost.

Last ChangeThe date and time at which Status last changed.AddrIP address and port of currently connected or most recently connected
DataSource.

8.5 Object Browser

The Object Browsing Tool, which ships with the Liberator, can be used to request data from the data source. Browse to Examples -> Object Browsing Tool and request (for example) /DEMO/ MSFT.

Request Ob	jects			
Enter Object: 🖡	/DEMO/MSFT		OK Car	ncel
Object Type	Record			
Parent Dir	/DEMO			
Туре	211			
dFullName	Microsoft			
dTime	12:11	12:11	12:11	12:11
dLast	56.510	53.963	52.473	53.340
dNet.Chng	2.330	-0.217	-1.707	-0.840
dVolumeAcc	16068000	16062000	16060000	16051000
dBestBid	53.680	51.557		
dBestAsk	55.871	53.661		
SID	demosvc			

Figure 8-2: Object Browser Tool from the Examples page

Monitoring system health using heartbeats

Use the following parameter in the configuration file *rttpd.conf* to configure the timing of heartbeats to client applications.

session-heartbeat The interval in seconds between heartbeats sent from the server to the RTTP client. The value must be an integer. See page 184

8.6 UDP commands

The Liberator includes a UDP command interface that enables you to send it UDP messages to reset peer connections after failover, and to change the verbosity of log messages.

To use this command interface you must first configure Liberator to listen for UDP messages.

■ Include the following options in the configuration file *rttpd.conf*..

	udp-port	Port to listen on for UDP messages. If not specified then UDP signals are disabled. See page 219
	udp-interface	Network interface to listen on for UDP messages. See page 219
	The UDP comman	nd has the following format:
udpsend	Sends a UDP me	ssage.
	Syntax:	udpsend [-s <server-ip>] [-p <port>] message</port></server-ip>

Parameters:

Name	Туре	Default	Description
<server-ip></server-ip>	string	127.0.0.1	The IP address of the machine to which the UDP message is to be sent. (This <i>must</i> be an IP address, not a host name.)
<port></port>	integer	10001	Port on which the Liberator listens for UDP messages. This must be the port number specified in the udp-port option in the Liberator's <i>rttpd.conf</i> file.
message	string	[no default]	Message to send; this can include spaces. Possible values are defined in the Debugging section on page 137 and the section Reconnecting peers using the UDP interface on page 115.

The **udpsend** utility is located in the Liberator's *bin* directory. For an example of how to use **udpsend** see the **debug** command in the **Debugging** section on page 137.

The default IP address specifies the local host, so, to send a UDP message to a Liberator located on the machine from where you are issuing the UDP command, you can just omit the -s parameter.

8.7 Debugging

There are several levels of verbosity of errors and events that Liberator can print to its log files. The reporting level can take any of the values shown in Table 8-3 below.

Value	Description
DEBUG	Reports all errors and events.
INFO	Reports events and information regarding normal operation and all errors included in the WARN, NOTIFY, ERROR and CRIT debug levels.
WARN	Reports minor errors and all errors included in the NOTIFY, ERROR and CRIT debug levels.

	NOTIFY	Report errors reg ERROR and CRI	• ·	and all errors included in the
	ERROR	Reports serious e included in the Cl	0 0	connections and all errors
	CRIT	Reports critical er	rrors that prevent Liberat	or from running.
		1	Table 8-3: Debug levels	
	on page 2	0	these, Liberator also	g level can be found as Appendix D logs other system messages and
1	message interface	e is enabled (see		gurable. However, when the UDP e 136), the level can be changed IP command .
	Use the follow Liberator will u	• ·	e configuration file <i>rttpd</i> .	conf to set the debugging level that
	debug-level	Determines the err Liberator starts op See page 158.		reported to the log files when
	The following UDF	command can be	sent over a Liberator's L	JDP interface.
	Dynamically changes the level of error and event reporting. This overrides the level set using the configuration option debug-level (see page 158).			
	Syntax: debug leve	el		
	Parameter:			
	Name	Туре	Default	Description
	level	string	[no default]	New level of debug messages.

For how to issue the debug UDP command, see the section UDP commands on page 136, and the following example.

Example:

Assuming the current directory is *\$INSTALL_DIR*, the following command will change the Liberator's event reporting level to WARN, by sending a UDP message to port 1247 on the default IP address of 127.0.0.1 (the local host).

./bin/udpsend -p 1247 debug WARN

If the command is successful the Liberator's event log will contain entries like the following:

2006/12/18-15:11:55.054 +0000: INFO: Processing UDP Command 'debug' with arguments 'WARN' 2006/12/18-15:11:55.069 +0000: NOTIFY: Attempting to change debuglevel to WARN 2006/12/18-15:11:55.069 +0000: NOTIFY: Successfully changed debuglevel to WARN

8.8 Latency Measurement

Latency Measurements Liberator can be setup to allow the latency of data updates through the system to be monitored.

Latency Chains

The latency added by each server side component in the system can be configured to add latency information as the update passes through, building up a chain of latency information. To achieve this the initial source of data must publish a millisecond timestamp to a field. Using that timestamp each DataSource component in the system will add its own delta from that timestamp when it enters and when it exits the process. Liberator will also add its own delta from the initial timestamp when a data update enters and when it is sent to a client.

Note: this system relies on all the machines involved having their clocks synchronised. The client monitoring machine will also have to be synchronised if the last part of the journey is to be measured.

Example Latency Chain

Object Name:	/VOD.L
Initial Timestamp:	LTY_INIT_TS = 1125062541880
List of Events:	LTY_LIST_EVENT = datasrcl_E,datasrcl_X, transformerl_E,transformerl_X,rttpdl_E,rttpdl_X
List of Timestamp Deltas:	LTY_LIST_TS = 0,1,3,4,5,8

The comma seperated list of deltas correspond to the event names in the list of events. Each value represents the milliseconds since the initial timestamp that the event occured. For each component there should be a Enter (E) and an Exit (X) event.

Note: in some cases Liberator will not add an Exit event, such as when the message is a cached value and the Exit time would be very large.

datasrc1_E	0	Time elapsed between initial timestamp and entering datasrc1
datasrc1_X	1	Time elapsed between initial timestamp and exiting datasrc1
transformer1_E	3	Time elapsed between initial timestamp and entering transformer1
transformer1_X	4	Time elapsed between initial timestamp and exiting transformer1
rttpd1_E	5	Time elapsed between initial timestamp and entering rttpd1
rttpd1_X	8	Time elapsed between initial timestamp and rttpd1

Config options:

name	type	default	description
latency-chain-enable	BOOLEAN	FALSE	Turns on latency chaining
latency-chain-name	STRING	'application-name'	The name used by this component for the latency events field.
latency-chain-init-ts-field	STRING	LTY_INIT_TS	Name of initial timestamp field
latency-chain-list-event-field	STRING	LTY_LIST_EVENT	Name of list event field
latency-chain-list-ts-field	STRING	LTY_LIST_TS	Name of list timestamp delta field

Note: these fields must exist in the fields.conf file.

name	type	default	description
latency-chain-base64-mode	ENUMERATED	'none'	Defines whether to base64 decode and/or encode latency fields.

Accepted values for latency-chain-base64-mode:

- never Do not treat values as base64 encoded
- decode Decode latency chain fields for all objects
- detect Decode latency chain fields if they look encoded
- encode Encode latency chain fields after adding local deltas if the fields were decoded

These values can be ORed together, for example, 'decode|encode' will decode the field values, add the component entries onto the end of the field values, then encode the final values.

Note: 'Encode' will only convert a value that has just been decoded into base64, it will not encode values that arrived in plain text.

End to End Latency The Liberator can also provide per update latency information to RTTP Clients. To achieve this RTTP Clients can be configured to calculate the offset between its own clock and the Liberators clock. This is done at regular intervals as clocks can drift overtime. With the offset available and a millisecond timestamp on each update, the RTTP Client SDKs can provide a millisecond latency figure for every update received.

The field used for the millisecond timestamp can either come from a DataSource or Liberator can be configured to add one itself. If a timestamp field is configured in Liberator, it will only add the timestamp to updates that do not contain that field.

Config:

name	type	default	description
timestamp-field	STRING	no default	The field name of the timestamp field.

Note: Latency measurements will be affected by some Liberator configuration settings. The two main areas that can delay messages are object throttling (see Using throttling on page 97) and bursting (see Configuring "bursts" on page 100). Object throttling by default is set to 1 second, this means it is possible that an update gets delayed by up to 1 second by this feature. Bursting on client session output by default is set to 0.5 seconds. Again this means an update could get delayed a further 0.5 seconds on top of the throttling delay. Both these features have their benefits, throttling prevents sending out multiple updates to the same object in a short space of time, and bursting can improve overall performance in a system with a large number of clients by batching together small messages when output to a client. Throttling can be turned off if that feature is not desirable, but it is recommended to always have a burst setting, even if it is small, such as 0.1 seconds.

9 Optimising efficiency

Adjusting the configuration parameters highlighted in this chapter can greatly improve the speed at which the Liberator performs in certain situations.

9.1 Improving performance using bursts

burst-min	Recommended value:	0.1
burst-max	it will batch those message. The default values of 0.2	0.5 Itting more than one message in the time period ges together and send them as a single write. 5 and 0.5 work well in most situations. A burst- an 0.5 can give a visual effect on the client side " instead of streamed.

9.2 Improving performance using threads

threads-num	Recommended value: At least 1 per CPU This states the number of client side threads and defaults to 2; however, Liberator will also use a thread on its DataSource side. There must be at least one thread per CPU. See page 212
buf-elem-len	Recommended value: 4096 Size of cached buffers. Increasing this will improve performance if using very large messages, but it will considerably affect memory usage. See page 211

9.3 Improving performance using hashtables

Adjusting the size of the hashtables enables you to allocate memory resources and adjust performance. For example, increasing memory requirements might improve the speed of certain operations.

object-hash-size	Recommended value: Twice the maximum number of objects. This is the size of the hashtable that holds objects. Increasing this will use extra memory, but it will benefit the speed of updates and requests if this is sufficiently high to avoid too many hash collisions.	
	Note: there is an internal object for each client session, so this hash size ideally would be the maximum number of objects + maximum number of sessions. This should be approximately the number of objects the Liberator will hold. Internally there is one additional object for each logged on user, so the object hashtable should be the number of objects + number of concurrent users. See page 210	
session-hash-size	Recommended value: Twice the max number of users Size of session hashtable. This figure should be increased so that it is greater than the maximum concurrent users.	
	<i>Note:</i> Increasing session-hash-size will result in more memory usage. See page 210	
user-hash-size	Recommended value: Twice the maximum number of usernames.	
	Size of user hashtable. This figure should be increased as an Auth module may allow more than one session per user. See page 210	
record-type2-hash-size	Recommended value: Twice the maximum number of type 2 pieces of data that expected to be cached multiplied by the maximum number of objects. Size of Type 2 data hashtable. See page 180	

9.4 Improving performance using TCP nodelay

direct-tcp-nodelay-off	Recommended value: FALSE Turns off the no delay feature for direct sockets. By default the Liberator turns on the TCP_NODELAY flag for direct and HTTP client sockets and gives better performance. See page 212
	The no delay option will prevent TCP from buffering small amounts of data to be sent while it is waiting for an acknowledgement from a previous send.
http-tcp-nodelay-off	Recommended value: FALSE Turns off the no delay feature for HTTP sockets. See page 213
datasrc-tcp-nodelay-off	Recommended value: FALSE Turns off the no delay feature for datasource peer sockets. See page 213

9.5 Improving performance using selected fields

By sending only the fields requested by the client, Liberator uses smaller data packets but more CPU time.

requested-fields-only	Recommended value:	TRUE
	Enables only fields reque	ested by a client to be sent to that
	client.	
	See page 188	

9.6 Reducing message sizes using fields.conf

Due to the way RTTP encodes field names, message sizes can be reduced slightly by configuring the most commonly used fields nearer the top of the fields.conf file.

9.7 Improving security measures

To avoid attacks on your system, Liberator includes a number of options to limit the acceptable length of RTTP messages (sent on a direct connection) and each part of an HTTP message. If Liberator receives a message longer than that configured, it will reject it instead of reading it continuously until it runs out of memory.

The following parameters configure the various maximum lengths of messages and their elements. The recommended values are the default settings for these options, but should be shortened if you experience security problems.

direct-max-line-length	Recommended value: 65536 Maximum number of bytes allowed in a single line of an RTTP message sent to Liberator through a direct connection. See page 167
http-max-request-length	Recommended value: 1024 Maximum number of bytes allowed in a single HTTP request line (the line that contains a GET or a POST instruction). See page 167
http-max-header-line-length	Recommended value: 65536 Maximum number of bytes allowed in a single HTTP header line. See page 167
http-max-header-lines	Recommended value: 30 Maximum number of header lines allowed in an HTTP message. See page 167
http-max-body-length	Recommended value: 65536 Maximum number of bytes allowed in the body of an HTTP message. See page 167

10 Running Liberator with many users

Liberator can normally support up to 10,000 concurrent user sessions, and upto 30,000 concurrent users on suitably specified hardware if the message rates are low.

Each connected session requires an open socket connection, which means the system needs to be able to have an open file descriptor for this socket. The operating system will typically need configuration to allow these high numbers of file descriptors.

10.1 Configuring Liberator for a high number of users

- If your licence has a max-user limit then the Liberator will attempt to set a suitable file descriptor limit when it starts. If you receive the error message "Failed to set system-max-files to nnnn" when starting the Liberator, then adjust the operating system configuration as described in the Changing file descriptor limits sections below.
- If your licence is for an unlimited number of users, set system-max-files (see page 155) to a suitable amount to allow the expected numbers of concurrent users to login.
- **Note:** Liberator uses a certain number of file descriptors internally, for log files, internal communications and handling HTTP requests. This means that if your Liberator will have 2000 users, a **system-max-files** value of 2048 will not be large enough. The safety margin that Liberator chooses when it sets **system-max-files** automatically is an extra 512.

10.2 Changing file descriptor limits—Linux

This section describes how you can edit various Linux configuration files to adjust the file descriptor limits. Please note that the location of these files may differ according to the Linux distribution you are using.

- Use the following parameter in the configuration file *rttpd.conf* to set file descriptor limits.
- system-max-files Maximum file descriptors for this process. This is overridden if the licence states a higher number of users. See page 155
- **Note:** On some systems you may also need to configure the operating system to allow a higher number of open file descriptors in order to set system-max-files.

	Note: If your licence is for an unlimited amount of users, you will need to set system-max-files to a number higher than your expected maximum concurrent users. See also max-user-warn on page 181
Per process	The following changes allow you to change the file descriptor limit per process, from the default soft limit anywhere up to the hard limit. This will allow you to increase system-max-files to a suitable amount.
	In /etc/security/limits.conf add the lines:
	<pre>* soft nofile 1024 * hard nofile 32768</pre>
	■ In / <i>etc/pam.d/login</i> add:
	session required /lib/security/pam_limits.so
System-wide	The following changes configure the system-wide file descriptor limits.
	In /etc/rc.d/rc.local add:
	echo 32768 > /proc/sys/fs/file-max echo 131072 > /proc/sys/fs/inode-max
	Alternatively, on RedHat 6.2 and above you can achieve the same by adding the following into /etc/sysctl.conf:
	<pre>fs.file-max = 32768 fs.inode-max = 131072</pre>
Configuring the range of ports	The following changes configure the range of ports to be used by the system. Using kernel 2.4 upwards, the following is the default for systems with more than 128Mb of RAM.
	■ In / <i>etc/rc.local</i> , add:
	<pre>echo "32768 61000" > /proc/sys/net/ipv4/ ip_local_port_range</pre>

■ Alternatively for RedHat 6.2 and above add the following to /etc/sysctl.conf:

net.ipv4.ip_local_port_range= 32768 61000

10.3 Changing file descriptor limits—Solaris

The following commands change both the per process and the system-wide file descriptor limits. They also increase the size of the TCP connection hashtable.

■ In /etc/system add:

```
set rlim_fd_cur = 256
set rlim_fd_max = 32768
set tcp:tcp_conn_hash_size = 65536
set ipc_tcp_conn_hash_size = 65536
```

11 Liberator demonstrations

To check your Liberator is running properly some simple examples are provided, created using the SL4B SDK.

Figure 11-1 shows one of these examples, in which values randomly generated by Liberator are updated in real time.

SL4B Examples: Object Oriented

This page demonstrates how a SL4B_AbstractSubscriber subclass can be written. Two instances of this subclass are created, the first responsible for requesting and displaying the equity data within the top table, whilst the second handles the foreign exchange data in the bottom table. Please <u>click here</u> for more information on how this page has been configured.

Equities

Symbol	Last	Time	VolumeAcc
AAPL	20.964	05:10	51,681,000
CSCO	13.690	05:10	93,533,000
DELL	24.565	05:10	62,415,000
INTC	25.618	05:10	68,929,000
MSFT	53.449	05:10	64,744,000
ORCL	13.041	05:10	70,755,000
SUNW	13.437	05:10	67,091,000
Foreign Exchange			
Currency	Bid	Ask	
EUR	0.8732	0.9075	

1 3526

Figure 11-1: SL4B example

In order to view this example, you must perform the following steps:

1.4078

Start the demo feed;

GBP

Access the relevant page on the Liberator web site.

11.1 Starting the demo feed—Linux and Solaris

The demo feed should be started using the demosrc script.

Start the feed by entering:

```
$ cd /opt/Liberator
$ ./etc/demosrc start
```

- Stop the feed by entering:
- \$ cd /opt/Liberator
 \$./etc/demosrc stop

These commands can be issued from anywhere; the current working directory does not matter.

11.2 Using an SSL connection for the demo feed

The default *rttpd.conf* configuration file has a sample SSL section which will work with the demonstration data feed.

For instructions on how to adjust the configuration to enable this SSL connection, see Using SSL with the demonstration feed on page 151

11.3 Viewing the examples on the website

To view the examples web page:

- Point your browser at http://<hostname>:8080 (where <hostname> is the host name or IP address of the machine you have installed the Liberator on);
- Click on Examples.

You will be prompted for a username and password. The default values are *admin* and *admin*.

Note: These defaults correspond to the default username and password options in the addauthdir entry of your configuration file (see add-authdir on page 165). Any changes made to this entry will be reflected in the accessibility of the web site example pages.

11.4 Using SSL with the demonstration feed

The default *rttpd.conf* configuration file has a sample SSL section which will work with the demonstration data feed described in this chapter.

Configuring the To enable the demonstration SSL connection, you must edit the configuration files for both the demonstration SSL Liberator and the demonstration feed: connection ■ Edit *rttpd.conf* and "uncomment" the datasrc-sslport and start-ssl options (i.e. remove the "#" characters) at the bottom of the file, as shown below. datasrc-sslport 25001 start-ssl enable-server server-authmode 1 server-cert certs/rttpd.pem server-key certs/rttpd.key CAfile rttpdCA/cacert.pem CApath rttpdCA/newcerts end-ssl

Edit *demosrc.conf* and comment out the first add-peer section (i.e. add a "#" character to the start of each line) and uncomment the second add-peer section and the start-ssl section, as shown below.

```
#add-peer
           25000
#
     port
#end-peer
add-peer
     port
            25001
     ssl
end-peer
. . .
start-ssl
     enable-client
     client-authmode 1
     client-cert certs/demosrc.pem
     client-key
               certs/demosrc.key
     CAfile
                demosrcCA/cacert.pem
     CApath
                demosrcCA/newcerts
end-ssl
```

12 Appendix A: Configuration reference

Liberator is configured by editing the entries in the plain text file *rttpd.conf*. This can be found within the Liberator installation directory (see Installing Liberator on page 30).

Some of the more advanced configuration options are described in Optimising efficiency on page 143.

rttpd.conf is split into different sections, each concentrating on a different area of functionality. Each section and the parameters within them are described below.

12.1 Main

	This section of <i>rttpd.conf</i> configures the main system settings. Specifies the root directory of the application installation.		
application-root			
	Туре:	string	
	Default value:	[current working directory]	
application-name	Distinguishes this	s application from other applications.	
	Туре:	string	
	Default value:	[set by application]	
event-log	Filename of the e	event log.	
	Туре:	string	
	Default value:	event-rttpd.log (event-%a.log)	
system-max-files	Maximum file descriptors for this process.		
	Туре:	integer	
	Default value:	1024	
runtime-user	This specifies a user to run the server as (UNIX only).		
	Туре:	string	
	Default value:	[no default]	
catch-crash	Turns on catching	g of application crashes (Linux and Solaris platforms only).	
	Туре:	boolean	
	Default value:	FALSE	

include-file	•	ion parameters contained in another later in the main configuration with a	file. These will be overwritten if the same different value.
		application-name (see page 155) ar ables application- or host-specific co	nd %h is replaced by the host name of the nfiguration to be used.
	Туре:	string	
	Default:	[no default]	
	Example:		
	include-file	myfile-%a-%h.conf	
pid-filename		n of the pid file to be defined uses available which is the users home di	the usual %a,%n,%r expansion options. rectory.
	Туре:	string	
	Default value:	%r/var/%a.pid	
license-file		e of the license file for the application specified in the default <i>rttpd.conf</i> .	n. The standard Liberator kit uses <i>license</i> -
	Туре:	string	
	Default value:	license.conf	
syslog-facility	This is the syslog (syslog)" on page	,	unix based syslog - See "System log files
	Туре:	string	
	Default value:	user6	

12.2 Logging

		<i>ttpd.conf</i> configures the logging of events. You can set global settings to specify log files, or configure the cycling of each log file individually.
log-dir	Default directory	in which to store log files.
	Туре:	string
	Default value:	application-root/var (%r/var)
log-maxsize	Maximum log file	e size in bytes.
	Туре:	integer
	Default value:	0
log-max-history	Maximum numbe	er of log lines to retain for monitoring
	Туре:	Integer
	Default value:	10
log-cycle-time	Time at which log	gs will cycle, in minutes from midnight.
	Туре:	integer
	Default value:	240 (i.e. 0400 hours).
		ne is greater than 1440 it is taken from the start of the week (Midnight Sunday This allows weekly log cycling on a specific day if the period is set accordingly as
log-cycle-period	Interval between	cycling logs, in minutes.
	Туре:	integer
	Default value:	1440 (i.e. daily)

log-cycle-suffix	Suffix for cycled that can be used	logs. See the UNICX manual page for strftime to see the possible format strings d here.
	Туре:	string
	Default value:	%u
og-cycle-offset	Specifies how m	nany minutes to take off the current time when creating the suffix.
	Туре:	integer
	Default value:	[The same as log-cycle-period. For example, if cycling at 0400 hours, the time passed into strftime to create the suffix will be 0400 hours the previous day.]
debug-level		errors and events that are reported to the log files when Liberator is operating es are shown in Table A.1 below.
		all error messages and their associated debug level can be found as Append ile messages and formats on page 232
	Туре:	string
	Default value:	info
	Value	Description
	DEBUG	Reports all errors and events.
	INFO	Reports events and information regarding normal operation and all errors included in the WARN, NOTIFY, ERROR and CRIT debug levels.
	WARN	Reports minor errors and all errors included in the NOTIFY, ERROR and CRIT debug levels.
	NOTIFY	Report errors regarding data corruptions and all errors included in the

ERROR and CRIT debug levels.

ERROR	Reports serious errors regarding network connections and all errors included in the CRIT debug level.
CRIT	Reports critical errors that prevent Liberator running.

Table 12-1: Debug levels

12.3 Advanced log file settings

As well as the global configure options for log file cycling in the Logging section, individual log files can be cycled.

add-log

Overrides the global default for a particular log file.

Syntax:

add-log		
na	ame	[value]
ma	axsize	[value]
ti	ime	[value]
pe	eriod	[value]
รเ	uffix	[value]
of	ffset	[value]
le	evel	[value]
mo	onitor-level	[value]
end-log		

The options in this entry are:

Name	Туре	Default	Description	
name	string	[no default]	Name of the log to the global settings Acceptable values	
			http_access_log page 165	the HTTP access log file (see
			news_log headlines (see pa	the log file to store news
			object_log page 183	the object log file (see
			request_log page 183	the request log file (see
			session_log page 183	the session log file (see
			event_log page 155	the event log file (see
			packet_log page 189	the packet log file (see
maxsize	integer	0	be cycled if they e	size in bytes. The log files will exceed the size specified here, of 0 means log files will cycle re checked.
time	integer	240 (i.e. 0400 hours)	Time at which log midnight.	s will cycle, in minutes from
period	integer	1440 (i.e. daily)	Interval between	cycling logs, in minutes.
suffix	string	%u	strftime (refer to y information on str	ogs. This is passed through our Unix manual for further ftime). The default value of %u ing created for each day of the

Name	Туре	Default	Description
offset	integer	log-cycle- period	Specifies how many minutes to take off the current time when creating the suffix. For example, if cycling at 0400 hours, the time passed into strftime to create the suffix will be 0400 hours the previous day.]
level	string	INFO (this defaults to	Debug level for the log.
		the global option log- level).	Note: This is only valid for the event log.
monitor- level	string	NOTIFY (this defaults to	Debug level to send messages to monitoring.
		the global option monitor- level).	Note: This is only valid for the event log.

12.4 HTTP

	This section of r	<i>ttpd.conf</i> configures the HTTP conn	ection and type of contents.
http-wwwroot	The root directory of the html files.		
	Туре:	string	
	Default value:	application-root/htdocs (%r/htdocs)
http-interface	Network interfact	es to listen on for HTTP connections	
	Default value:	[all available interfaces]	
	Syntax:	http-interface IPaddresses	
	The option in this entry is:		
	Name	Type Default	Description
	Name IPaddresses		•
http-port	IPaddresses] Space-separated list of interface IP addresses to listen on for HTTP
http-port	IPaddresses	array [all available interfaces] Space-separated list of interface IP addresses to listen on for HTTP
http-port	IPaddresses Network port to I	array [all available interfaces] Space-separated list of interface IP addresses to listen on for HTTP
http-port http-keepalive-max	IPaddresses Network port to I Type: Default value:	array [all available interfaces isten for HTTP connections.] Space-separated list of interface IP addresses to listen on for HTTP connections.

Default value: 20

http-keepalive-timeout	Timeout period in seconds of HTTP Keep Alive connections.	
	Туре:	integer
	Default value:	30
http-refuse-time	Time in seconds	to refuse new connections if no sockets are available.
	Туре:	float
	Default value:	5.0
http-server-name		the HTTP response headers. This option is to change the default, which is sed for security reasons so the type of server is not advertised.
	Туре:	string
	Default value:	
http-indexfile	List of files to att	empt to use when a directory is requested.
	Туре:	string
	Default value:	index.html, index.js
http-rttp-content-type	Default RTTP st	ream content type.
	Туре:	string
	Default value:	application/octet-stream
http-def-content-type	Default HTTP co	ontent type.
	Туре:	string
	Default value:	text/plain

http-err-content-type	Error message content type.		
	Туре:	string	
	Default value:	text/html	
http-idx-content-type	Index page conte	ent type.	
	Туре:	string	
	Default value:	text/html	
http-access-log	Name of the HT	TP access log file.	
	Туре:	string	
	Default value:	http-access-rttpd.log (http-access-%a.log)	
http-error-log Name of the HTTP error log file. This file logs all HTTP red found error.		TP error log file. This file logs all HTTP requests that result in an Object not	
	Туре:	string	
	Default value:	http-error-rttpd.log (http-error-%a.log)	
add-authdir	Defines an HTTF	P-authenticated directory.	

Syntax:

add-authdir		
name	[value]	
realm	[value]	
username	[values]	
password	[values]	
check-mod	lule	
end-authdir		

The options in this entry are:

Name	Туре	Default	Description
name	string	/status	The full HTTP directory name.
realm	string	Liberator Admin	The HTTP basic authentication realm.
username	array of strings	admin	Username or names. See below.
password	array of strings	admin	Password or passwords (to match the users in username list. See below
check-module	boolean	FALSE	Determines whether this directory will ask the Auth Module to authenticate the user instead of using the list of usernames and passwords given above.

Multiple usernames and passwords can be entered in the following ways: either as spaceseparated lists, as individual entries, or a combination of the two.

Examples:

add-authdir	
username A	lf Bill Carl Dave
password p	wA pwB pwC pwD
end-authdir	

or add-authdir username Alf password pwA username Bill password pwB username Carl Dave pwC pwD password end-authdir Maximum number of bytes allowed in a single line of an RTTP message sent to Liberator direct-max-line-length through a direct connection. Default value: 65536 http-max-request-length Maximum number of bytes allowed in a single HTTP request line (the line that contains a GET or a POST). Default value: 1024 http-max-header-line-Maximum number of bytes allowed in a single HTTP header line. length Default value: 65536 http-max-header-lines Maximum number of header lines allowed in an HTTP message. Default value: 30 Maximum number of bytes allowed in the body of an HTTP message. http-max-body-length Default value: 65536 http-connection-cookie-If set, the server will set a cookie in the client when the client connects over HTTP. enable Type: boolean Default value: FALSE

http-connection-cookie- expires	Number of days before the cookie expires.	
	Туре:	integer

Default value: 1

12.5 RTTP

	This section of <i>rttpd.conf</i> configures the RTTP connection.			
rttp-type5-js	RTTP Type 5 Javascript filename			
	Туре:	String		
	Default value:	/sl4b/javascript-rttp-provider/streaming-type5.js		
rttp-type5-pad-length	RTTP Type 5 hea	ader padding in bytes		
	Туре:	Integer		
	Default value:	4096		
rttp-type3-timeout	RTTP Type 3 time	eout in seconds		
	Туре:	Float		
	Default value:	10.0		
rttp-hostname	RTTP Hostname	Override		
	Туре:	String		
	Default value:	[NO DEFAULT]		

12.6 Enable HTTPS

https-enable	This option swite	ches on support for H	TTPS connections.	
	Туре:	boolean		
	Default value:	FALSE		
https-interface	This option confi	gures the network int	erface to listen on for	HTTPS connections.
	Syntax: h	ttps-interface IPa	ddresses	
	The option in this	s entry is:		
	Name	Туре	Default	Description
	IPaddresses	array	[all available interfaces]	Space-separated list of interface IP addresses to listen on for HTTP connections.
https-port	This option confi	gures what network p	port to listen on for HT	TPS connections.
	Туре:	integer		
	Default value:	4443		
https-certificate	This option confi	gures the filename of	the SSL certificate.	This file should be in PEM format.
	Туре:	string		
	Default value:	cert.pem		
https-privatekey	This option confi	gures the filename of	the SSL private key.	This file should be in PEM format.
	Туре:	string		
	Default value:	cert.pem		

https-passwordfile	This option identifies the file containing the SSL certificate passphrase.	
	Туре:	string
	Default value:	.rttpd_ssl.https.pass
https-cipher-list		penssl function SSL_CTX_set_cipher_list which allows different SSL ciphers to Please refer to OpenSSL documentation for more information on this feature nssl.org).
	Туре:	string
	Default value:	DEFAULT
ssl-random-seed	0	eeding of the OpenSSL random number generator, which the Liberator uses for HTTPS and DataSource SSL connections.
	Syntax:	ssl-random-seed type arg1 arg2

The options in this entry are:

Name	Default	Description
type	[no default]	Type of random number generation. Must be one of the following:builtinThis takes no arguments and uses various system commands to produce random output.fileUses the data in the file to seed the random number generator.execUses the output of the command to seed the random number generator.

Name	Default	Description
arg1	[no default]	If type is file, this is a filename (relative to the Liberator Root Directory). If type is exec, this is a command line (relative to the Liberator Root Directory)
arg2	[no default]	If type is file, this specifies how many bytes of the file to use. If type if exec, this specifies how many bytes of the output to use.

```
ssl-random-seed file etc/randomdata
ssl-random-seed file etc/randomdata 1024
ssl-random-seed exec etc/random.sh
ssl-random-seed exec etc/random.sh 512
```

- **Note:** On Linux OpenSSL is seeded by a hardware device so using ssl-random-seed may be unnecessary.
- **ssl-engine-id** The SSL hardware or software engine to support. The default value of 'openssl' or 'software' will stop the server attempting to use an SSL card. If a value of 'all' is provided then the server will attempt to find and use any SSL cards available on the machine. Any other value will be considered to be a specific SSL card please refer to the OpenSSL documentation for a full list of what is supported.

	Туре:	string
	Default value:	openssl
ssl-engine-flags	Flags to be passe	ed to the engine implementation.
	Туре:	string
	Default value:	All (see page 88 for a list of flags)

add-virtual-host

Identifies a virtual host that Liberator will serve.

Syntax:

add-virtual-host	
name	[value]
addr	[value]
wwwroot	[value]
https-certificate	[value]
https-privatekey	[value]
https-passwordfile	[value]
end-virtual-host	

The options in this entry are:

Name	Туре	Default	Description
name	string	addr	Name for this virtual host.
addr	string	[no default]	Local ip address or hostname.
wwwroot	string	http-wwwroot	Root directory of the HTML files. Overrides the global setting http- wwwroot (see page 163)
https-certificate	string	https-certificate	Filename of the SSL certificate. Overrides the global setting https-certificate (see page 170).
https-privatekey	string	https-privatekey	Filename of the SSL private key. Overrides the global setting https-privatekey (see page 170)
https-passwordfile	string	https-passwordfile	File containing the SSL certificate passphrase. Overrides https- passwordfile (see page 171)

12.7 Direct connections

	This section of <i>rttpd.conf</i> configures the direct (type 1) RTTP connection.			
direct-interface	Network interfaces to listen for direct (type 1) RTTP connections.			
	Default value:	[all availa	able interfaces]	
	Syntax:	direct-interface IPaddresses		
	The option in this	s entry are:	:	
	Name Type Default Description		Description	
	IPaddresses	array	[all available interfaces]	Space-separated list of interface IP addresses to listen on for RTTP connections.
direct-port	Network port to I	isten for di	rect (type 1) RTT	P connections.
	Туре:	integer		
	Default value:	15000		
direct-refuse-time	Time in seconds to refuse new connections if no sockets are available		if no sockets are available	
	Туре:	float		
	Default value:	5.0		

12.8 Objects			
		<i>rttpd.conf</i> configures the way the Liberator deals with RTTP objects and the object types. See "About RTTP objects" on page 78. for more information.	
object-throttle-times	An array of throttle times in seconds. For more information see Using throttling on page 97.		
	Туре:	integer array	
	Default value:	1.0	
object-throttle-default- level	The throttle level	that all users start at on login	
	Туре:	integer	
	Default value:	0	
object-throttle-off	Turns the throttli	ng capability off.	
	Type:	boolean	
	Type.	boolean	
	Default value:	FALSE	
active-discard-timeout	Default value:		
active-discard-timeout	Default value: Time in seconds	FALSE	
active-discard-timeout	Default value: Time in seconds it.	FALSE that the Liberator will hold on to an active object after the last user stops viewing	
active-discard-timeout record-max-cache	Default value: Time in seconds it. Type: Default value:	FALSE that the Liberator will hold on to an active object after the last user stops viewing integer	
	Default value: Time in seconds it. Type: Default value:	FALSE that the Liberator will hold on to an active object after the last user stops viewing integer 60	
	Default value: Time in seconds it. Type: Default value: Maximum numbe	FALSE that the Liberator will hold on to an active object after the last user stops viewing integer 60 er of type 3 record data to keep.	

Syntax:

add-object				
name	[value]			
type	[value]			
flags	[value]			
init	[value]			
source	[value]			
throttle-times	[value]			
purge-time	[value]			
purge-period	[value]			
purge-age	[value]			
only-changed-fields				
end-object				

The options in this entry are:

Name	Туре	Default	Description
name	string	[no default]	The name of the object. Must be set.
type	integer	[no default]	The RTTP object type. Must be set. Values are shown in Table A.2 below.
flags	integer	0	Flags used when creating the object.
init	string	NULL	Object type-specific initialisation string.

Name	Туре	Default	Description
throttle-times	float array	[no default]	An array of throttle times in seconds (same as object-throttle-times; see page 175). Acceptable values are positive numbers, 0, "high", "priority" and "stopped" or "paused".
			Note: The array must be in ascending order of throttle times, and if you use "stopped" or "paused" it must be the last entry in the array.
			Note: If the only throttle time is "high" or "priority" it means the object is a high priority object and updates for it will jump the user's output queue on the server. This should only be used for objects sending important and infrequent messages.
purge-time	integer	-1 (no purge)	Number of minutes from midnight to start purging (deleting the object from the Liberator's cache). See page 89 for a description and examples of how this option can be used to configure object purging.
purge-period	integer	1440	Number of minutes between purges. See page 89 for a description and examples of how this option can be used to configure object purging.

Name	Туре	Default	Description
purge-age	integer	0	A multiplier on purge-period. Defines how old an object should be before it is purged. See page 89 for a description and examples of how this option can be used to configure object purging.
only- changed- fields	boolean	FALSE	Configures an object to only forward the fields changed from the last update

Table A.2: Object types

	Object Type	Description
	20	Directory
	21	Page
	22	Record
	23	News headline
	24	News story
	27	Chat object
default-type	Sets the default su	ub-type of objects.
	Туре:	integer
	Default value:	211
add-type-mapping	Adds a sub-type mapping.	
	Туре:	string, integer
	Default value:	[no default]

object-map	Adds an object mapping				
	Syntax:	object-map	[name of object to b	e changed]	[new name for object]
	Туре:	string			
	Default value:	[no default]			
object-precache-enable	Enables the caching of objects before they are requested.				
	Туре:	boolean			
	Default value:	FALSE			
record-type1-clear-on- failover	Clears all type 1 data for active objects when failing over to a new DataSource p reconnecting to the same one. This can allow cached data to be refreshed from th DataSource.				
	Туре:	boolean			
	Default value:	FALSE			
record-type2-clear-on- failover	Clears all type 2 data for active objects when failing over to a new DataS reconnecting to the same one. This can allow cached data to be refreshed DataSource.				
	Туре:	boolean			
	Default value:	FALSE			
record-type3-clear-on- failover	••		•	-	a new DataSource peer or be refreshed from the new
	Туре:	boolean			
	Default value:	FALSE			

record-type2-hash-size	Size of the Type 2 data hashtable.		
	Туре:	integer	
	Default value:	65536	

12.9 Auth modules

	This section of <i>rttpd.conf</i> configures the authentication and entitlement processing. For more information on Liberator permissioning, please refer to Authentication and entitlement on page 103.	
auth-moddir	Directory from wh	nere authentication modules are loaded.
	Туре:	string
	Default value:	application-root/lib (%r/lib)
auth-module	Name of authent	ication module.
	Туре:	string
	Default value:	xmlauth
max-user-warn		mber of users at which a warning about the number of users approaching the max-user-limit) will be logged to the event log (see max-user-limit on page 181
	Туре:	integer
	Default value:	0 [no warning]
max-user-ok	Specifies the nur will be logged to	nber of users at which a message confirming that the user level is acceptable the event log.
	Туре:	integer
	Default value:	0
max-user-limit	Number of users	allowed on the Liberator.
	Туре:	integer
	Default value:	0

auth-login-timeout	Timeout period in seconds when logging in and auth_new_user returns AUTH_DELAYED (see auth_new_user in the companion document Liberator Auth Modules Developer's Guide).	
	Туре:	integer
	Default value:	30
auth-map-timeout	•	n seconds when requesting a mapped object and auth_map_object returns (see auth_map_object in the companion document Liberator Auth Modules de).
	Туре:	integer
	Default value:	30
write-users-period	Time period in se	conds for writing users file
	Туре:	integer
	Default value:	3600
write-users-time	Time in minutes fr	rom midnight before writing users file1 means never
	Туре:	integer
	Default value:	-1

12.10 Sessions

	This section of <i>ri</i>	<i>ttpd.conf</i> configures the user session.
session-log	Name of the ses	sion log file.
	Туре:	string
	Default value:	session-rttpd.log (session-%a.log)
request-log	Name of the requ	uest log file.
	Туре:	string
	Default value:	request-rttpd.log (request-%a.log)
object-log		ject log file which keeps a record of all request and discard commands for ther those commands were successful.
	Туре:	string
	Default value:	object-rttpd.log (object-%a.log)
noauth-reconnect	Determines whe the user attempt	ther the Liberator uses the Auth Module to check a user's authentication when s to reconnect.
	Туре:	boolean
	Default value:	FALSE
session-timeout	Sets the time in but not managed	seconds for which the Liberator will maintain a session if a user has connected to log in.
	Туре:	integer
	Default value:	60

session-reconnect- timeout	Sets the time in seconds for which the Liberator will maintain a session following a disconnection.		
	Туре:	integer	
	Default value:	30	
session-heartbeat	The interval in seconds between heartbeats sent from the server to the RTTP client.		
	Туре:	integer	
	Default value:	0 (no heartbeats)	

12.11 Clustering

	This section of <i>rttpd.conf</i> configures the clustering of multiple Liberators.		
cluster-index	The index number of this cluster node.		
	Туре:	integer	
	Default value:	0	
cluster-cache-request- objects	Determines whe	ther to request objects when other Liberators do.	
	Туре:	boolean	
	Default value:	FALSE	
cluster-cache-source- routing	Determines whe	ther to request objects from the same source as other Liberators.	
	Туре:	boolean	
	Default value:	FALSE	
cluster-addr	Network interfac	e of this node.	
	Туре:	boolean	
	Default value:	FALSE	
cluster-port	Network port of t	his node.	
	Туре:	boolean	
	Default value:	FALSE	
type1-host	RTTP type 1 hos	st.	
	Туре:	boolean	
	Default value:	FALSE	

Network port of this node.

type1-port	RTTP type 1 port	i.		
	Туре:	boolean		
	Default value:	FALSE		
type2-url	RTTP type 2 url.			
	Туре:	boolean		
	Default value:	FALSE		
cluster-cache-source- routing	Determines whet	her to request o	objects from the same sour	ce as other Liberators.
	Туре:	boolean		
	Default value:	FALSE		
priority	Adds a cluster no	ode.		
	Syntax:			
		er-addr er-port	[value] [value]	
	The options in thi	is entry are:		
	Name	Туре	Default	Description
	cluster-addr	string	127.0.0.1	Network interface of this node.

integer

2333

cluster-port

12.12 Fields

	This section of <i>r</i> About RTTP obj	1 5 6	•	ained in objects.	For more information see
fields-file	Name of an alter	native file for fie	elds configuration.		
	Туре:	string			
	Default value:	fields.conf			
add-field	Adds a field.				
	Syntax:				
	add-field	FieldName	FieldNumber	FieldFlags	[FieldFlagsData]

The options in this entry are:

Name	Туре	Default	Description
FieldName	string	[no default]	The name of the field.
FieldNumber	integer	[no default]	The number of the field. Must be between -65535 and 65535 inclusive.
FieldFlags	integer	0	The flags passed by the field (see the section entitled Identifying the fields clients can request on page 94 for more information).
FieldFlagsData	integer	-1	Number of decimal places the field uses when FieldFlags is set to 256 (see the section entitled Identifying the fields clients can request on page 94 for more information).

FieldFlags (text)	FieldFlags (integer)	Description	FieldFlagsData	FieldFormat
type2_index index	1	Identifies field as Type 2 index	Not used	Not used
type2	2	ldentifies field as Type 2 field	Not used	Not used
type3	4	Identifies field as Type 3 field	Not used	Not used
dp decimal_precision	256	Decimal point precision mode	Number of decimal places	Not used

Table 12-2: Acceptable values of FieldFlags option

Note: Due to the way RTTP encodes field names, message sizes can be reduced slightly by configuring the most commonly used fields nearer the top of the fields.conf file.

requested-fields-only Enables only the fields requested by the client to be sent by Liberator.

Type: boolean

Default value: FALSE

numeric-locale Locale for numeric field formatting

12.13 DataSource peers

	sources of data.	<i>attpd.conf</i> is used to configure the connections between the Liberator and its A DataSource peer is a remote application which uses DataSource messaging data to the Liberator.
datasrc-name	The name of the	Liberator, and how DataSource peers will identify it.
	Туре:	string
	Default value:	%a-%h
datasrc-id	ID number of this	s Liberator.
	Туре:	integer
	Default value:	0
datasrc-reject-new-peers		ther a DataSource peer trying to connect to the Liberator when there is already vith the same id, is forbidden to connect.
	Туре:	boolean
	Default value:	FALSE
datasrc-pkt-log	Name of the Libe	erator packet log file.
	Туре:	string
	Default value:	packet-rttpd.log (packet-%a.log)
datasrc-interface	Network interface	e to listen for connections from DataSource peers.
	Туре:	integer
	Default value:	[all available interfaces]

datasrc-port	Network port to listen for connections from DataSource peers. The default of 0 means that no connections can be made to Liberator.		
	Туре:	integer	
	Default value:	0	
datasrc-sslport	Network port to I	isten for SSL connections from DataSource peers.	
	Туре:	integer	
	Default value:	0 (no SSL connections can be made)	
datasrc-default-obj-hash- size	Default number of	of entries in the active object hashtable.	
	Default value:	16384	
datasrc-rerequest-timeout		onds that the Liberator waits for a datasource to respond when rerequesting an atasrc was previously sending to Liberator. A rerequest happens when a datasrc comes back up.	
	Default value:	30	
add-peer	Adds a DataSou file.	rce peer. You can have a maximum of 63 add-peer entries in your configuration	

Syntax:

add-peer	
remote-id	[value]
remote-name	[value]
remote-flags	[value]
remote-type	[value]
local-id	[value]
local-name	[value]
local-flags	[value]
local-type	[value]
addr	[value]
port	[value]
queue-size	[value]
queue-delay	[value]
obj-hash-size	[value]
ssl	[value]
request-timeout	[value]
label	[value]
end-peer	

The options in this entry are:

Name	Туре	Default	Description
remote-id	integer	1	ID number of DataSource peer.
remote-name	string	scr-0	Name of DataSource peer. Gets overridden by startup packet when the peer connection is made.
remote-flags	integer	0	DataSource peer flags. Gets overridden by the startup packet when the peer connection is made.

Name	Туре	Default	Description
remote-type	integer	0	DataSource peer type. Gets overridden by the startup packet when the peer connection is made. Possible values are "none" (0), "active" (1) or "contrib" (2).
local-id	integer	datasrc-id	ID number of the Liberator. Sent to the DataSource peer.
local-name	string	datasrc-name	Name of the Liberator. Sent to the DataSource peer.
local-flags	integer	0	Flags determining restart and reconnection behaviour. The flags can be ORed together (for example "sendfromseq recvautoreplay"). Possible values: "none" or 0 No special restart/reconnection behaviour; "sendfromseq" or 1 When reconnecting, missed packets should be requested based on sequence number; "recvautoreplay" or 4 When restarting, this peer should accept replay updates.
local-type	integer	0	Data source type sent to the connecting peer. Possible values are "none" (0), "active" (1) or "contrib" (2).
addr	array of strings	localhost	Space-separated list of addresses to connect to if making the connection and not listening/ accepting the connection.*

Name	Туре	Default	Description
port	array of integers	[no default]	Space-separated list of ports to connect to if making the connection and not listening/ accepting the connection.*
queue-size	integer	50	Message queue size.
queue-delay	float	0.1	Message queue delay in seconds.
obj-hash-size	integer	datasrc-default- obj-hash-size	Number of entries in active object hashtable.
ssl	boolean	False	Determines whether this connection should be made using SSL. For more information on SSL connections, see Making SSL connections with DataSources on page 123
request- timeout	float	10	Time in seconds that the Liberator will wait for this DataSource peer to answer a request. Overrides the global request timeout option.
heartbeat-time	integer	[disabled]	Time in seconds between DataSource heartbeats.
heartbeat- slack-time	integer	2	Time in seconds after a heartbeat has not been received before disconnecting and trying to reconnect.
label	string	peer[int]	There must be a label set for each label used in the Data services section.

Note: addr and port should only be included if the connection is to be made to the peer as opposed to listening for a connection. If additional addr and port combinations are given

they will be used as failover addresses if the first fails to connect (the peer must be configured to accept connections—this is done through the datasrc-port entry in the peer's configuration file).

start-ssl Configures the SSL connection when setting up the Liberator to be both client and server ends of a Secure Sockets Layer channel.

Note: Not all options listed in this group are appropriate for both server and client modes.

Syntax:

start-ssl				
enable-server				
enable-client				
server-authmode	[value]			
client-authmode	[value]			
server-cert	[value]			
client-cert	[value]			
server-key	[value]			
client-key	[value]			
cipher	[value]			
ssl2				
ssl3				
CApath	[value]			
CAfile	[value]			
ssl-info				
end-ssl				

The options in this entry are:

Name	Туре	Default	Description
enable-server	boolean	FALSE	Enables server-side SSL.
enable-client	boolean	FALSE	Enables client-side SSL.
server- authmode	integer	0	A logical OR of the flags described in server-authmode and client-authmode flags on page 197. Exactly one of the mode flags SSL_VERIFY_NONE and SSL_VERIFY_PEER must be set at any time.

Name	Туре	Default	Description
client- authmode	integer	0	A logical OR of the flags described in server-authmode and client-authmode flags on page 197. Exactly one of the mode flags SSL_VERIFY_NONE and SSL_VERIFY_PEER must be set at any time.
server-cert	string	server.pem	Filename of the location of the server-side certificate.
server-key	string	server-cert	Filename of the location of the server-side private key.
client-cert	string	NULL	Filename of the location of the client-side certificate.
client-key	string	client-cert	Filename of the location of the client-side private key.
cipher	string	[strongest common cipher]	Sets the cipher to be used for the connection (usually] defined on client side). Cipher types can be identified using the https-cipher-list option (see page 171).
ssl2	boolean	FALSE	Sets the SSL protocol level to Level 2.
ssl3	boolean	FALSE	Sets the SSL protocol level to Level 3.
CApath	string	System CApath	Sets the directory name of the directory where the trusted certificates are held.

Name	Туре	Default	Description
CAfile	string	NULL	Sets the filename of the file where all trusted certificates are held.
ssl-info	boolean	FALSE	Enables SSL connection negotiation debugging.

client-authmode and server-authmode flags

Table 12-3 below describes the flags to be used for the *client-authmode* and *server-authmode* options within the start-ssl group.

Name	Value	server-authmode description	client-authmode description
SSL_VERIFY_NONE	0	Liberator will not send a client certificate request to the client, so the client will not send a certificate.	If not using an anonymous cipher (disabled by default), the Liberator will send a certificate which will be checked. The handshake will be continued regardless of the verification result.
SSL_VERIFY_PEER	1	Liberator sends a client certificate request to the client. The certificate returned (if any) is checked. If the verification process fails, the TLS/SSL handshake is immediately terminated, with an alert message containing the reason for the verification failure. The behaviour can be controlled by the additional SSL_VERIFY_FAIL and SSL_VERIFY_CLIENT_ONC E flags.	The server certificate is verified. If the verification process fails, the TLS/SSL handshake is immediately terminated with an alert message containing the reason for the verification failure. If no server certificate is sent, because an anonymous cipher is used, SSL_VERIFY_PEER is ignored.

Name	Value	server-authmode description	client-authmode description
SSL_VERIFY_FAIL	2	If the client did not return a certificate, the TLS/SSL handshake is immediately terminated with a "handshake failure" alert. This flag must be used together with SSL_VERIFY_PEER.	Ignored
SSL_VERIFY_CLIE NT_ONCE	4	Only request a client certificate on the initial TLS/ SSL handshake. Do not ask for a client certificate again in case of a renegotiation. This flag must be used together with SSL_VERIFY_PEER.	Ignored

Table 12-3: client-authmode and server-authmode flags

ssl-passwordfile

Identifies the file containing the SSL certificate passphrase.

Type: string

Default value: .rttpd_ssl.ssl.pass

12.14 Data replay

This section of rt	tpd.conf configures how Liberator replays data.
Time (in minutes restart.	after midnight) that the server should load previously received messages on a
Туре:	integer
Default value:	1440 (i.e. no replay)
The number of w 1440).	hole days to go back from the time indicated by datasrc-auto-replay (if less than
Туре:	integer
Default value:	7
Specifies a list of	log files to replay.
Туре:	string
Default value:	0
	Time (in minutes restart. Type: Default value: The number of w 1440). Type: Default value: Specifies a list of Type:

12.15 Data services	
	This section of <i>rttpd.conf</i> configures how Liberator connects to its data sources.
New in version 4.0	Version 4.0 of the Liberator incorporates improved source mapping over previous versions, with the following key features.
	 More intuitive configuration
	 More clearly defined handling of objects recieving data from multiple sources at the same time
	 Ability to define both failover and round-robin style mappings with priorities
	A Source Mapping definition is called a Service. A service comprises a name, one or more subject patterns to match and one or more source groups.
The service name	This is an indentifier which can be used in status messages. RTTP objects have a field called SID which is the service name.
	Note: When picking a service for an object, the first defined match takes priority. As such you should ensure that each object is associated with one and only one service.
The subject patterns	These are regular expression strings to accept or deny for this service. A service will allow multiple patterns including patterns to deny. Exclude patterns can help to define the namespace used.
	Note: When checking pattern matches within a service definition, the first match takes priority whether it is an include or an exclude.
The source groups	The main part of the service definition is the source groups. This is one or more sets of sources, plus certain attributes which define the behaviour of the group. In most cases only a single group is defined. When multiple groups are defined for a service it means that a request will attempt to get the object from a source from each group. Multiple groups allow an object to have different sets of fields coming from different sources, for example.
Priorities	Priorities are defined within each source group and are taken in the order in which they are defined. Multiple labels can be defined within each priority. Within a priority, labels are tried on a round robin basis.
Timeouts	There are several timeouts associated with Data Services. By default when an object is requested, if after 10 seconds there has been no response, the request will be cancelled and the user informed. This is the <i>service-request-timeout</i> and applies to the whole object request. It is

also possible to timeout requests to individual sources, to allow the request to move on to another source. This is the source-request-timeout, which by default is not turned on. The Source timeout is only useful when using a priority group with multiple sources within it as it allows the system to try more than one source before giving up. These timeouts are only relevant when a source does not respond to a request, when the timeout occurs a discard message is sent to the source so it is aware that the request is cancelled. service-request-timeout Global request timeout for all services. Type: float Default value: 10 source-request-timeout Global request timeout for all sources. Type: float Default value: -1 cleanup-stale-timeout Time in seconds after which stale objects will be deleted from the Liberator cache. . Type: float Default value: 0 (disabled) datasrc-default-obj-hash-Default number of entries in the active object hashtable. This size can be overridden by putting a size value in the obj-hash-size option of the add-peer entry. Default number of entries in the active object hashtable. This size can be overridden by putting a value in the obj-hash-size option of the add-peer entry. Type: integer Default value: 16384

add-data-service	Starts the definition of a data service. Syntax:			
	add-data-service			
	servi	ce-name	[value]	
	reques	st-timeout	[value]	
	exclud	de-pattern	[value]	
	includ	de-pattern	[value]	
	add-so	ource-group		
		required	[boolean]	
		retry-time	[value]	
		add-priority		
		label	[value]	
		end-priority		
	end-so	ource-group		
	end-data-se:	rvice		
service-name	Name of the serv	vice group.		
	Туре:	string		
	Default value:	none		
request-timeout			all requests for this service. Should no response be object will be assumed to be not available.	
	The default value	e of -1 means that reque	ests will never timeout.	
	Туре:	float		
	Default value:	-1.000000		
exclude-pattern	Patterns to exclu	de.		
	Туре:	function		
	Default value:	none		

include-pattern	Patterns to include.		
	Туре:	function	
	Default value:	none	
add-source-group	Add a source gro	bup.	
	Туре:	boolean	
	Default value:	false	
required	This sets whether info message.	er or not this source going down generates a status stale message or a status	
	Туре:	boolean	
	Default value:	false	
retry-time		nount of time in seconds after finding that all the labels in a group are down, connect to that group again.	
	Туре:	float	
	Default value:	30	
add-priority	Start a priority gr	oup.	
	Туре:	string array	
	Default value:	none	
label	Peer labels.		
	Туре:	string array	
	Default value:	none	

add-data-service					
service-name	FX				
exclude-pattern	^/I/X*				
include-pattern	^/I/*				
include-pattern	^/B/*				
add-source-group					
required	true				
retry-time	45				
add-priority					
label	sourceA				
end-priority					
add-priority					
label	sourceB				
label	sourceC				
end-priority					
end-source-group					
add-source-group					
required	false				
add-priority					
label	sourcel				
label	source2				
end-priority					
end-source-group					
end-data-service					

Below is an example section of *rttpd.conf* illustrating data services:

Default behaviour

If no data-service is defined in *rttpd.conf* then the application will act as if the following was defined:

add-data-service	
service-name default	
include-pattern	^/
add-source-group	
required	false
add-priority	
label	sourcel
end-priority	
end-source-group	
add-source-group	
required	false
add-priority	
label	source2
end-priority	
end-source-group	
add-source-group	
required	false
add-priority	
label	sourceN
end-priority	
end-source-group	
end-data-service	

This means that a request will be sent to all active DataSources at once.

Conversion Pre-version 4.0 source mapping should be converted to version 4.0 data services in the following manner:

All peers should have a label defined in the add-peer configuration section, for these example conversion, the label is 'src' appended with the the remote-id.

add-source-mapping /A/* 1 should be converted to:

```
include-pattern ^/A/
add-source-group
required true
add-priority
label srcl
end-priority
end-source-group
```

add-source-mapping /A/* 1,2 should be converted to:

include-pattern	^/A/	
add-source-group		
required	true	
add-priority		
label	srcl	
label	src2	
end-priority		
end-source-group		

add-source-mapping /A/* 1 2 should be converted to:

include-pattern	^/A/		
add-source-group			
required	true		
add-priority			
label	srcl		
end-priority			
end-source-group			
add-source-group			
required	true		
add-priority			
label	src2		
end-priority			
end-source-group			

add-source-mapping /A/* 1,2 3,4 should be converted to:

include-pattern	^/A/	
add-source-group		
required	true	
add-priority		
label	srcl	
label	src2	
end-priority		
end-source-group		
add-source-group		
required	true	
add-priority		
label	src3	
label	src4	
end-priority		
end-source-group		

12.16 Latency

latency-chain-enable	Enable Latency Chaining.		
	Туре:	Boolean	
	Default:	FALSE	
latency-chain-name	Latency Chain Name used for e	event list field.	
	Туре:	String	
	Default:	%a	
latency-chain-init-ts-field	Latency Chain Init Timestamp F	Field Name.	
	Туре:	String	
	Default:	LTY_INIT_TS	
latency-chain-list-event- field	Latency Chain Event List Field	Name.	
	Туре:	String	
	Default:	LTY_LIST_EVENT	
latency-chain-list-ts-field	Latency Chain Timestamp List	Field Name.	
	Туре:	String	
	Default:	LTY_LIST_TS	
latency-chain-base64- mode	This option defines how latency chain field values will be processed with respect to base64 encoding. The options can be ORed together, for example 'decode encode' will decode the field values, add the component entries onto the end of the field values, then encode the final values.		
	Туре:	Integer	
	Default:	0	

Note: 'Encode' will only convert a value to base64 that has just been decoded, it will not encode values that have arrived in plain text.

Acceptable Values:

Name	Value	Desc
never	0	Default - do not treat values as base64 encoded
decode	1	Decode latency chain fields before processing
detect	2	Decode latency chain fields if they are encoded
encode	4	Encode latency chain fields after processing

12.17 Tuning		
		<i>pd.conf</i> configures the more advanced options available in Liberator. These nore depth in Optimising efficiency on page 143
object-hash-size	Size of RTTP ob Liberator will hold.	ject hashtable. This should be approximately the number of objects the
	Туре:	integer
	Default value:	5000
user-hash-size	Size of user hasht	able.
	Туре:	integer
	Default value:	8192
session-hash-size	Size of session ha	ishtable.
	Туре:	integer
	Default value:	8192
session-max-queue- length		ue in the server waiting to be sent to the client must reach before the server insecutive increases to the queue length.
	Туре:	integer
	Default value:	5242880
session-max-queue-count		r of consecutive times the queue length in the server has to increase after the ie-length has been reached before the connection is dropped.
	Туре:	integer
	Default value:	10

burst-min	Starting point in seconds of client update buffering (i.e. start of burst).		
	Туре:	float	
	Default value:	0.1	
burst-max	Maximum time ir	n seconds of client update buffering.	
	Туре:	float	
	Default value:	0.5	
burst-increment	Burst buffer dela	y increment in seconds	
	Туре:	float	
	Default value:	0.05	
buf-cache-size		he buffer cache in megabytes. On top of this the Liberator will use about 15Mb , and this memory requirement will increase as the amount of users and data	
	Туре:	integer	
	Default value:	16	
buf-elem-len	Length of standa	ard buffer element, in bytes.	
	Туре:	integer	
	Default value:	4096	
output-queue-size	The number of u	pdate messages the Liberator will store per client.	
	Туре:	integer	
	Default value:	64 (maximum is 4096)	

threads-num	Number of session threads to run.			
	Туре:	integer		
	Default value:	2		
add-thread	Configures the o Syntax:	ptions for each t	thread.	
	add-thread	interface	[value]	
	http-		[value]	
		t-interface	[value]	
	direc	t-port	[value]	
	end-thread			

The options in this entry are:

Name	Туре	Default	Description
http-interface	string	[All available interfaces]	Network interface to listen for HTTP connections.
http-port	integer	8080	Network port to listen for HTTP connections.
direct-interface	string	[All available interfaces]	Network interface to listen for direct (type1) RTTP connections.
direct-port	integer	15000	Network port to listen for direct (type1) RTTP connections.

direct-tcp-nodelay-off Turns off the no delay feature for direct sockets.

Type: boolean

Default value: FALSE

http-tcp-nodelay-off	Turns off the no delay feature for HTTP sockets.		
	Туре:	boolean	
	Default value:	FALSE	
datasrc-tcp-nodelay-off	Turns off the no delay feature for datasource peer sockets.		
	Туре:	boolean	
	Default value:	FALSE	
batch-discard-time	Batch time for active discards		
	Туре:	float	
	Default value:	2.0	
object-delete-batchtime	Time for batching up deletes		
	Туре:	float	
	Default value:	0.5	
object-delete-time	Time delay for deleting a group of objects		
	Туре:	float	
	Default value:	0.5	

12.18 News

This section of *rttpd.conf* configures the way in which the Liberator handles requests for news headlines. newsitems-saved Maximum number of news items (headlines) that Liberator stores in memory. Type: integer Default value: 500 newsitems-max Maximum number of news items that the Liberator will send to any particular client for any one request. Type: integer Default value: 500 newscode-max-length Determines the maximum length of a news code. Type: integer Default value: 4 newscode-exceptions Determines whether there are any exceptions to the newscode-max-length rule (i.e. whether there are any news codes that are longer than newscode-max-length). Type: boolean Default value: FALSE add-newscodes If there are permissible exceptions to newscode-max-length, this parameter should include an array of codes listing the permitted exceptions. Type: string array Default value: [no default]

newscode-hash-size	Default number	of entries in the newscode exceptions hashtable.	
	Туре:	integer	
	Default value:	191	
news-purge-time	This represents the number of minutes from midnight that the purge of news headlines (i.e deletion from the Liberator's cache) should take place.		
	Туре:	integer	
	Default value:	 -1 (no purge, in which case newsitems-max will limit the number of headlines stored.) 	
news-purge-days	Number of days-worth of headlines to keep when purging.		
	Туре:	integer	
	Default value:	0	
news-datetime-format	t Time string used for news headline items (UNIX users should refer to strftime manual for further information).		
	Туре:	YY mm HH:MM:SS	
	Default value:	"%b [int] %H:%M:[str]" (i.e. current year, month, hours, minutes and seconds)	
newscodes-valid-chars	A list of characters that are valid in a news code.		
	Туре:	string	
	Default value:	"/." (any uppercase characters and the characters "/" or "." (for example "FIN" or "BT.L").	
news-log	Filename of log file to store news headlines for replaying on startup.		
	Туре:	string	
	Default value:	[no news headlines stored]	

news-replay	Time (in minutes after midnight) that the server should start replaying news headlines on a restart.		
	Туре:	integer	
	Default value:	OFF	
news-replay-days	The number of w than 1440).	hole days to go back from the time indicated by news-replay (if news-replay less	
	Туре:	integer	
	Default value:	0	
news-replay-files	The news logs to	o replay.	
	Туре:	string array	
	Default value:	news-log	
newsitems-hash-size	Size of the news	items hashtable	
	Туре:	integer	
	Default value:	191	

12.19 KeyMaster

	This section of <i>rttpd.conf</i> configures the way in which user signatures are authenticated. For more information on how the Liberator authenticates users, see Authentication and entitlement on page 103		
signature-validtime	How long a gene	erated signature is valid for, in seconds.	
	Туре:	integer	
	Default value:	600	
signature-hashsize	Size of hashtable	e for storing signature keys.	
	Туре:	integer	
	Default value:	8192	
add-sigkey	Adds a signature	e checking key to the configuration file.	
	Syntax:		
	add-sigkey key-id timeou keyfil end-sigkey	ut [values]	

The options in this entry are:

Name	Туре	Default	Description
key-id	string	[no default]	The user name for this signature key. Must be the same as the siguser parameter of an add-user entry in an Auth Module configuration file (see add-user for cfgauth on page 221).
timeout	float	600	How long a generated signature is valid for, in seconds. Overrides signature-validtime (see page 217).
keyfile	string	[no default]	Filename of public key.

12.20 UDP interface

udp-port	Port to listen on for UDP messages. If not specified then udp signals are disabled.		
	Туре:	integer	
	Default value:	[no default]	
udp-interface	Network interface to listen on for UDP messages.		
	Туре:	integer	
	Default value:	[all available interfaces]	

12.21 Openauth.conf configuration

read-access	Determines all users' read access to objects.	
	If set to 0	no user can view any objects;
	If set to 1	all users can view all objects.
	Default value:	1
write-access	Determines all us	ers' permission to write to or create any object.
	If set to 0	no user can write to any object;
	If set to 1	all users can write to any object.
	Default value:	0

12.22 Cfgauth.conf configuration

add-user

Adds a user to the cfgauth configuration file.

The entry must use the following syntax:

add-u	ser	
	username	[values]
	password	[values]
	licenses	[values]
	read	[values]
	write	[values]
	prefix	[values]
	sigcheck	
	siguser	[values]
	http	
	expire	[value]
end-u	ser	

The options in this entry are:

Name	Туре	Default	Description
username	string	[no default]	The username for this user.
password	string	[no default]	The password for this user. If encrypted-passwords is set to 1 then this should be an encrypted password as produced by the cfgpass utility (see encrypted-passwords on page 223).
licenses	integer	1	The number of licences this user has.
read	integer array	none	Space-separated list of object types this user can read. The types are listed in the default cfgauth.sample file.
write	integer array	none	Space-separated list of object types this user can write to.

Name	Туре	Default	Description
prefix	string	none	This is an optional prefix that will be added to all requests by this user.
sigcheck	boolean	FALSE	If set to TRUE ignores password and uses the signature checker to authenticate the user.
			The signature checker works by having a public key specified by an add-sigkey entry in <i>rttpd.conf</i> (see Signature Authentication on page 108). add-sigkey includes a user parameter, which must be the same as the siguser parameter below to authenticate a user.
siguser	string	username	If sigcheck is set to TRUE, this option is used to identify the user for the purpose of checking signatures. This means you can have several users pointing to the same signature checking key—siguser must be the same as the user parameter in an add-sigkey entry in <i>rttpd.conf</i> . Signature authentication on page 108for more information.
http	boolean	FALSE	If set to TRUE allows HTTP authentication for this user. See auth_http_request function in the accompanying document Liberator Auth Module Developer's Guide.
expire	YYYYMMDDNN	NULL	If set, defines a start date and number of days this user is valid for. The format of the string should be YYYYMMDDNN, where NN is the number of days the user is valid for.

encrypted-passwords	Determines whether a password is encrypted or not.		
	If set to 0	password is set as clear text;	
	If set to 1	password is encrypted.	
	Default value:	0	

12.23 Licencing

UUPP

The license file can be found in the *etc* directory of the root of your Liberator installation.

Configuration options:

Name	Туре	Default	Description
uupp-qdbm- name	STRING	%r/users/uupp-%a.conf [%a will be replaced by the application name, eg rttpd]	Location of the database.
uupp-delimiter	CHAR	1.1	Used to separate application name/user id - it may need to be changed if users/apps can have the delimiter in the name
uupp-sync- time	FLOAT	300 (secs)	Time to synchronise the database to disc

12.24 Java Configuration

All java configuration options are now held in an external file from *rttpd.conf*.

java-file

Name of an alternative file for java configuration.

Type: string

Default value: java.conf

12.25 Java.conf configuration

A Java Virtual Machine (JVM) is required to execute Java modules created using the Java Auth SDK and to enable JMX Monitoring.

Note: When using Linux, LD_LIBRARY_PATH must be set to /usr/java/jre/lib/i386:/usr/java/jre/ lib/i386:/server where the java runtime environment is installed in /usr/java/jre.

jvm-location	Location of the Jathe .so suffix.	Location of the Java Virtual Machine file ${\rm libjvm.so.}$ Should contain the complete path and include the .so suffix.		
	Туре:	string		
	Default value:	[no default]		
jvm-global-classpath	Location of the g	lobal classpath. There must be a separate jvm-global-classpath entry for each		
	Туре:	string		
	Default value:	%r/lib/java		
add-javaclass	Identifies the Aut console.	h SDK Java module to be loaded and is also used to specify the JMX monitoring		
	syntax:	add-javaclass class-name class-id classpath end-javaclass		

The options in this entry are:

Name	Туре	Default	Description
class-name	string	[no default]	The fully-qualified class name of the Java module to load.
class-id	string	0	Short identifier of the Java class.
classpath	string array		Adds a Java classpath.

jvm-options

Adds a standard startup option for the JVM. Multiple configuration lines may be specified.

Type: string

Default value: no default

For example, to enable socket debugging on port 9955 the following configuration options could be added:

jvm-options -Xdebug

jvm-options -Xrunjdwp:transport=dt_socket,server=y,suspend=n,address=9955

12.26 Monitoring configuration

This configuration should be added to java.conf as in the following example

```
add-javaclass
                                  class-name com.caplin.management.jmx.JMXController
                                  class-id
                                                jmx
                                  classpath %r/lib/java/jmx-child-classloader.jar
                                                %r/lib/java/common-jmx.jar
                                  classpath
                             end-javaclass
                            The following configuration options are specified in in rttpd.conf.
monitor-plugin
                            Loads the JMX monitoring module into the Liberator.
                            syntax:
                                                        monitor-plugin jmx
add-monuser
                            Specifies the credentials that allow a JMX enabled client application to log into the Liberator.
                            There are two alternative ways to specify these credentials:
                            syntax (alternative 1):
                                                         add-monuser
                                                              user username
                                                              pass password
                                                              addr 127.0.0.1
```

end-monuser

The options for this entry are:

Name	Туре	Default	Description
user	string	[any]	The username that the JMX enabled client application will use to log in to the Liberator. If the user and pass options are not specified then the Liberator will accept monitoring login requests from <i>any</i> user with the IP address specified in the addr option.
pass	string	[any]	The password that the JMX enabled client application will use to log in to the Liberator.
addr	string	[any]	An IP address in dot notation (n.n.n.n). The Liberator will accept monitoring login requests from this IP address only. Just ONE address may be specified per <i>add-monuser</i> block. If multiple addresses are required then define each one in a separate <i>add-monuser</i> block. If the addr option is not specified then the Liberator will accept monitoring login requests from <i>any</i> IP address.

Example:

```
add-monuser
user admin
pass admin
addr 192.168.201.107
end-monuser
```

In this example the Liberator will accept monitoring login requests from the IP address 192.168.201.207, where the user login name is "admin" and the user's password is also "admin".

Note: It is recommended that you specify an add-monuser entry with explicit user, pass and addr options (or network and netmask options in place of addr – see below). If the add-monuser entry has no options explicitly defined, or is missing altogether, the Liberator will by default accept monitoring login requests from any user on any IP address.

The alternative way to specify the network access credentials is to provide network and netmask specifications, instead of a specific IP address. This will allow login requests from multiple addresses within a network, without needing to define multiple *add-monuser* blocks.

syntax (alternative 2):	add-monuser	
	user	admin
	pass	admin
	network	192.168.201.0
	netmask	255.255.255.0
	end-monuser	

The network specification options for this entry are:

Name	Туре	Default	Description
network	string	[no default]	An IP network specification in dot notation (n.n.n.n).
netmask	string	[no default]	An IP netmask specification in dot notation (n.n.n.n).

Example:

add-monuser		
user	admin	
pass	admin	
networ	k 192.168.201.0	
netmas	k 255.255.255.0	
end-monuser		

In this example the Liberator will accept monitoring login requests from any host address on the 192.168.201.0 network.

Note: The default Liberator configuration file in the install kit contains the following JMX login credentials:

```
add-monuser
user admin
pass admin
ipaddress 127.0.0.1
end-monuser
```

This configuration will only permit the JMX client to access the Liberator from the local machine, which may mean the monitoring console will not connect. You may therefore need to change these options.

The following configurations will allow a JMX enabled client to log in to the Liberator from *any* network address:

add-monuser			
user	admin		
pass	admin		
end-monuser			

or

```
add-monuser
user admin
pass admin
network 0.0.0.0
netmask 0.0.0.0
end-monuser
```

log-monitor-level

Specifies the log level for the monitoring log file. This file will be located with the other Liberator log files in the *var* directory. The file name will depend on the mode the user is running the Liberator in. The file will always be prefixed with jmx-. So for example if the Liberator was running in SSL mode then the file would be *jmx-rttpd_ssl.log*. Log wrapping will be applied to this file if wrapping is enabled.

syntax: log-monitor-level LEVEL

	Please see Appendix C: Debug Levels and Messages on page 243 for valid values of LEVEL.			
monitor-moddir	Monitor module directory If the first two characters are %r then this will be expanded as relative to the liberator application root directory.			
	Туре:	string		
	Default value:	%r/lib		
session-monitoring- interval	Session monitoring interval in seconds (set to -1 to disable)			
	Туре:	float		
	Default value:	-1.0		
object-monitoring-interval	Object monitoring interval in seconds (set to -1 to disable)			
	Туре:	float		
	Default value: -1.0			

12.27 Javaauth configuration

This configuration should be added to java.conf as in the following example:

```
add-javaclass

class-name examples/DelayedLoginAuthenticator

class-id authenticator

class-path /home/dom/src/rttpd/src/lib/java/examples.jar

end-javaclass
```

Where there is an entry:

javauth-classid authenticator

in javaauth.conf.

debug-level	This sets the debug level.		
	Туре:	string	
	Default value:	DEBUG	
javaauth-classid	This specifies the class-id to load.		
	Туре:	string	
	Default value:	javaauth	

12.28 Container configuration

container-request-timeout	Timeout in seconds for broadcast container objects		
	Туре:	float	
	Default value:	5.0	

13 Appendix B: Log file messages and formats

13.1 Session log

The session log records actions and events regarding Liberator sessions and connections.

Session log messages

Table 13-1 lists the possible messages that will be written to the session log.

Message type	Description	EXTRA arguments
OPEN	New session opened. Client has connected.	[none]
CLOSE	Session closed.	 Reason for session closing: 1 Logout from client 2 Lost type 1 connection 4 Lost type 2 connection 8 Lost type 3 connection 16 Server kicked out as couldn't write 32 Server kicked out as couldn't write whole packets 64 Reconnected on new session, so this one closed 128 Timeout after lost connection 256 Timeout due to not logging in successfully
LOST	Session connection lost.	Reason for loss of connection: arguments as for CLOSE
LOGIN_OK	Session logged in successfully.	[none]
RECON_OK	Session reconnected successfully.	[none]

	LOGIN_FAIL	Session failed to login.	-1 -2 -3 -4 -5 -6 -7 -8 -9 something t	login failure: General denial Another general denial Invalid username Invalid password Invalid IP address Account expired User licence exceeded Site licence exceeded Auth error (module did unexpected) User defined reasons
	LOGOUT_OK	Session logged out.	[none]	
		Table 13-1: Ses	sion log messa	ges
Session log format	All session log mes	sages have the same forma	ıt:	
	TIMESTAMP IP-A	DDRESS MSG-TYPE USER	NAME SESSI	ON-ID REASON [EXTRA]

For RECON_OK the last field gives the previous session ID (i.e. the session ID of the session that has been reconnected to).

The REASON field is only used by CLOSE, LOST and LOGIN_FAIL. For others this field will be 0.

Example:

```
2005/08/15-04:55:54.101 +0100: 192.168.201.210 LOGIN_OK maggie 1001RK 0
2005/08/15-05:05:59.301 +0100: 192.168.201.210 LOGOUT_OK maggie 1001RK 0
2005/08/15-05:05:59.201 +0100: 192.168.201.210 CLOSE - 1001RK 1
2005/08/15-05:07:01.201 +0100: 192.168.201.210 OPEN - 1007zX 0
2005/08/15-05:07:01.201 +0100: 192.168.201.210 LOGIN_OK maggie 1007zX 0
2005/08/15-05:14:18.201 +0100: 192.168.201.104 LOST - 0006IW 4
2005/08/15-05:14:18.201 +0100: 192.168.201.104 OPEN - 000346 0
2005/08/15-05:14:18.201 +0100: 192.168.201.104 RECONNECT_OK livedemos
000346 0 0006IW
2005/08/15-05:14:18.201 +0100: 192.168.201.104 CLOSE - 0006IW 64
2005/08/15-05:17:06.201 +0100: 192.168.201.210 LOGOUT_OK maggie 1007zX 0
2005/08/15-05:17:06.201 +0100: 192.168.201.210 CLOSE - 1007zX 1
2005/08/15-05:18:08.201 +0100: 192.168.201.210 OPEN - 00002C 0
2005/08/15-05:18:08.201 +0100: 192.168.201.210 LOGIN OK maggie 00002C 0
2005/08/15-05:21:08.201 +0100: 192.168.201.121 LOST - 0004dG 4
2005/08/15-05:21:08.201 +0100: 192.168.201.121 OPEN - 0003L- 0
2005/08/15-05:21:09.201 +0100: 192.168.201.121 RECONNECT_OK livedemos
0003L- 0 0004dG
2005/08/15-05:21:09.201 +0100: 192.168.201.121 CLOSE - 0004dG 64
2005/08/15-05:28:14.201 +0100: 192.168.201.210 LOGOUT_OK maggie 00002C 0
2005/08/15-05:28:14.201 +0100: 192.168.201.210 CLOSE - 00002C 1
2005/08/15-05:29:15.201 +0100: 192.168.201.210 OPEN - 1003gD 0
2005/08/15-05:29:15.201 +0100: 192.168.201.210 LOGIN_OK maggie 1003gD 0
2005/08/15-05:39:21.201 +0100: 192.168.201.210 LOGOUT_OK maggie 1003gD 0
2005/08/15-05:39:21.201 +0100: 192.168.201.210 CLOSE - 1003gD 1
2005/08/15-05:40:22.201 +0100: 192.168.201.210 OPEN - 1007-- 0
2005/08/15-05:40:22.201 +0100: 192.168.201.210 LOGIN OK maggie 1007-- 0
2005/08/15-05:50:28.201 +0100: 192.168.201.210 LOGOUT_OK maggie 1007-- 0
```

13.2 Request log

The request log shows the raw RTTP messages sent by each client. This is before the message is parsed so could contain anything in that field.

Request log format All session log messages have the same format:

TIMESTAMP IP-ADDRESS USERNAME SESSION-D MESSAGE

Example:

2005/08/21-15:04:42.201 +0100: 192.168.201.16 - 2ADqSL "2ADqSL LOGIN 000000 CLIENT/CLEAR RTTP/2.0 demouser demopass" 2005/08/21-15:04:46.201 +0100: 192.168.201.16 demouser 2ADgSL "2ADgSL LOGOUT" 2005/08/15-04:11:27.201 +0100: 192.168.201.210 maggie 0004p_ "0004p_ REQUEST / EOUITIES/MSFT" 2005/08/15-04:11:27.201 +0100: 192.168.201.210 maggie 0004p_ "0004p_ REQUEST / FX/GBP" 2005/08/15-04:11:28.201 +0100: 192.168.201.210 maggie 0004p_ "0004p_ REQUEST / IPE/IPE/HB" 2005/08/15-04:14:17.201 +0100: 192.168.201.104 - 0006IW "0006IW NOOP" 2005/08/15-04:14:17.201 +0100: 192.168.201.104 - 0006IW "0006IW LOGIN 0003U-CLIENT/CLEAR RTTP/0.2 bobby11 mypassw11" 2005/08/15-04:21:08.201 +0100: 192.168.201.121 - 0004dG "0004dG NOOP" 2005/08/15-04:21:08.201 +0100: 192.168.201.121 - 0004dG "0004dG LOGIN 000770 CLIENT/CLEAR RTTP/0.2 bobby11 mypassw11" 2005/08/15-04:21:32.201 +0100: 192.168.201.210 maggie 0004p_ "0004p_ LOGOUT " 2005/08/15-04:22:34.201 +0100: 192.168.201.210 - 1002i0 "1002i0 LOGIN 000000 CLIENT/CLEAR RTTP/0.2 maggie thatcher" 2005/08/15-04:22:34.201 +0100: 192.168.201.210 maggie 1002i0 "1002i0 REQUEST / EOUITIES/MSFT" 2005/08/15-04:22:34.201 +0100: 192.168.201.210 maggie 1002i0 "1002i0 REQUEST / FX/GBP" 2005/08/15-04:22:34.201 +0100: 192.168.201.210 maggie 1002i0 "1002i0 REQUEST / IPE/IPE/HB" 2005/08/15-04:32:39.201 +0100: 192.168.201.210 maggie 1002i0 "1002i0 LOGOUT "

13.3 Object log

The object log shows which objects are successfully requested and discarded by each RTTP client. This is after processing client requests and one line per object instead of the unprocessed request log.

Object log format All object log messages have the same format:

TIMESTAMP SESSION-ID TYPE OBJECT

Where TYPE is either REQUEST or DISCARD.

Example:

2005/08/15-08:27:06.201	+0100:	0000Fw	REQUEST	/HBT/snpsrc-frac
2005/08/15-08:27:07.201	+0100:	0000Fw	REQUEST	/HBT/snpsrc-deci
2005/08/15-08:27:07.201	+0100:	0000Fw	REQUEST	/IPE/IPE/HB
2005/08/15-08:37:10.201	+0100:	0000Fw	DISCARD	/HBT/snpsrc-frac
2005/08/15-08:37:10.201	+0100:	0000Fw	DISCARD	/HBT/snpsrc-deci
2005/08/21-15:04:42.201	+0100:	2ADgSL	DISCARD	/DEMO/AMZN
2005/08/21-15:04:42.201	+0100:	2ADgSL	DISCARD	/DEMO/CSCO
2005/08/21-15:04:42.201	+0100:	2ADgSL	DISCARD	/DEMO/EBAY
2005/08/21-15:04:42.201	+0100:	2ADgSL	DISCARD	/DEMO/FX/DEM
2005/08/21-15:04:42.201	+0100:	2ADgSL	DISCARD	/DEMO/FX/EUR
2005/08/21-15:04:42.201	+0100:	2ADgSL	DISCARD	/DEMO/FX/GBP
2005/08/21-15:04:46.201	+0100:	2ADgSL	DISCARD	/DEMO/AMZN
2005/08/21-15:04:46.201	+0100:	2ADgSL	DISCARD	/DEMO/CSCO
2005/08/21-15:04:46.201	+0100:	2ADgSL	DISCARD	/DEMO/EBAY
2005/08/21-15:04:46.201	+0100:	2ADgSL	DISCARD	/DEMO/FX/DEM
2005/08/21-15:04:46.201	+0100:	2ADgSL	DISCARD	/DEMO/FX/EUR
2005/08/21-15:04:46.201	+0100:	2ADgSL	DISCARD	/DEMO/FX/GBP

13.4 Packet log

The packet log shows all messages sent between Liberator and its data sources.

Packet log messages Table 13-2 lists the possible messages that can be written to the packet log.

Message	Description	EXTRA arguments
PEERINFO	These messages are sent and received when a two datasource applications connect. A PEERINFO can also be sent at other times indicating the status of a DataSource.	DATASRC-NAME [MSG-ID] [MSG- STR]
DATAUPD ATE	This is the most common type of message in a packet log. These messages are actual data being sent from a DataSource to a Liberator.	SEQUENCE-NUMBER FLAGS OBJECT-NAME NUM-FIELDS [FIELD-DATA]

SUBJREQ	This message shows when a request for objects is made to a DataSource.	NUM-OBJECTS [OBJECT-NAMES]
SUBJDSC	This message shows when a discard message is sent to a DataSource, informing a datasource the liberator no longer wants to receive updates for that object.	Identical format to SUBJREQ.
DOWN	This shows when a DataSource connection goes down. More detailed information on connections can be found in the event log.	
NODATA	This message is sent when a DataSource does not have the object being requested or wishes to inform the Liberator at any point of a change in this condition.	OBJECT-NAME FLAGS
STATUS	This shows object status messages from a DataSource.	OBJECT-NAME FLAGS MSG-ID MSG-STR

Table 13-2: Packet log messages

Table 13-3 lists the possible value for the FLAGS field when used in a NODATA message.

EXTRA argument	Description
PEERINFO MSG-ID MSG-STR	Status conditions.
DATAUPDATE FIELD-DATA	A space separated list of field/value pairs. These are given as field numbers as that is what is sent on the Datasource protocol, these would have to be matched up with the Liberator's fields.conf to find the names.

	SUBJREQ SUBJDSC OBJECT-NAMES	A space-separated list of object names.		
	NODATA FLAGS	 NOT FOUNDThe object does not exist READ DENIEDAccess to this object is denied DELETE Delete the object UNAVAILABLEObject may exist but is not available at the moment 		
	STATUS OBJECT-NAME FLAGS	The object in question. 0x0000 Status Info 0x0001 Object is Stale (won't receive updates) 0x0002 Object is Stale and should be removed from any watch lists 0x0004 Object is not stale. 0x0100 Wait for update. When used with Stale indicates that a data update will clear the Stale status. When used with Not Stale indicates that the object is only not stale once a data update is received. 0x1101 Failover. Object is stale and Liberator should failover to another DataSource if possible. MSG-ID MSG-STRUser definable		
		Table 13-3: NODATA message flags		
Packet log format	All packet log messages ha			
	TIMESTAMP IP-ADDRESS DIRECTION TYPE PEER-ID [EXTRA] The DIRECTION field is either "<" or ">". "<" means a message is received, and ">" is a message sent. With sent messages the PEER-ID is the ID of the DataSource the message is being sent to, and with received messages it is the ID of the DataSource the message is from.			
Packet log examples	PEERINFO messages:			
	bigsun 0 2005/08/21-15:04:03 0	.201 +0100: 127.0.0.1 < PEERINFO 1 demosrc- .201 +0100: 127.0.0.1 > PEERINFO 0 rttpd-bigsun .201 +0100: 127.0.0.1 < PEERINFO 3 testsrc-		

DATAUPDATE messages:

2005/08/21-15:04:03.201 +0100: 127.0.0.1 < DATAUPDATE 1 1 48 /DEMO/ AAPL 8 10003=Apple 10436=21.332 10441=22.203 10006=21.767 10005=09:04 10032=2000000 10011=0.887 10005=09:04 2005/08/21-15:04:03.201 +0100: 127.0.0.1 < DATAUPDATE 1 2 48 /DEMO/ AMZN 8 10003=Amazon 10436=8.165 10441=8.499 10006=8.332 10005=09:04 10032=1700000 10011=-0.388 10005=09:04 2005/08/21-15:04:03.201 +0100: 127.0.0.1 < DATAUPDATE 1 3 48 /DEMO/ CSCO 8 10003=Cisco 10436=13.932 10441=14.501 10006=14.217 10005=09:04 10032=45700000 10011=0.347 10005=09:04

SUBJREQ messages:

2005/08/21-15:22:37.201 +0100: 127.0.0.1 > SUBJREQ 3 2 /I/VOD.L /I/ ANL.L

SUBJDSC messages:

2005/08/21-15:23:45.201 +0100: 127.0.0.1 > SUBJDSC 3 2 /I/VOD.L /I/ ANL.L

DOWN messages:

2005/08/21-15:24:09.201 +0100: 127.0.0.1 < DOWN 3

NODATA messages:

2005/08/21-15:28:53.201 +0100: 127.0.0.1 < NODATA 3 /I/VOD.L 1 2005/08/21-15:28:53.201 +0100: 127.0.0.1 < NODATA 3 /I/ANL.L 1

STATUS messages:

```
2005/08/21-15:40:48.201 +0100: 127.0.0.1 < STATUS /I/VOD.L 0x0001 8
Data may be stale
2005/08/21-15:40:53.201 +0100: 127.0.0.1 < STATUS /I/VOD.L 0x0104 6
Data may be ok now
2005/08/21-15:40:58.201 +0100: 127.0.0.1 < STATUS /I/VOD.L 0x0004 4
Data is ok now
2005/08/21-15:41:03.201 +0100: 127.0.0.1 < STATUS /I/VOD.L 0x0000 9
Everything is fine
2005/08/21-15:41:20.201 +0100: 127.0.0.1 < STATUS /I/VOD.L 0x1101 3
Try somewhere else
```

13.5 HTTP access log

This logs all HTTP requests made to the Liberator. This is similar to most web servers log files.

HTTP access log format The format is as follows:

TIMESTAMP IP-ADDRESS REQUEST HTTP-RESPONSE-CODE RESPONSE-SIZE-IN-BYTES PORT-NUMBER

Example:

192.168.201.16 - - [21/Aug/2005:15:04:34 +0100] "GET /demos/rtml/ rtml.html HTTP/1.1" 200 2192 192.168.201.16 - - [21/Aug/2005:15:04:34 +0100] "GET /demos/rtml/ common.css HTTP/1.1" 200 522 192.168.201.16 - - [21/Aug/2005:15:04:34 +0100] "GET /rtml/ HTTP/ 1.1" 200 9570 192.168.201.16 - - [21/Aug/2005:15:04:35 +0100] "GET /rtml/lib/ formatting.js HTTP/1.1" 200 3769 192.168.201.16 - - [21/Aug/2005:15:04:35 +0100] "GET /rtml/lib/ stale.js HTTP/1.1" 200 1167 192.168.201.16 - - [21/Aug/2005:15:04:35 +0100] "GET /rtml/ w3clibrary.js HTTP/1.1"200 3122

13.6 HTTP error log

Example:

[01/Dec/2004:11:47:09.123 +0000] [error] [client 127.0.0.1] File does not exist: /opt/Liberator/htdocs/notfound

13.7 Event log

The event log is a text log file which can be viewed with normal commands. It contains information about starting up, shutting down and connections to datasources.

Example:

2005/08/25-13:52:17.420 +0	100:	CONFIG: UDP Message port not configured
2005/08/25-13:52:17.420 +0	100:	NOTIFY: Attempting to change debug-level to INFO
2005/08/25-13:52:17.420 +0	100:	NOTIFY: Successfully changed debug-level to INFO
2005/08/25-13:52:17.420 +0	100:	NOTIFY: Liberator/4.0.0 starting
2005/08/25-13:52:17.420 +0	100:	NOTIFY: Logging to /opt/caplin/Liberator/var
		NOTIFY: Licence will expire on Wed Dec 28 00:00:00 2005
2005/08/25-13:52:17.421 +0	100:	NOTIFY: system-max-files set to 1024
2005/08/25-13:52:17.422 +0	100:	INFO: Loaded auth module <openauth></openauth>
2005/08/25-13:52:17.423 +0	100:	INFO: Next cycle of UUPP database (/opt/caplin/Liberator/
users/uupp-rttpd.db) sched	luled	for Wed Aug 31 23:59:59 2005
2005/08/25-13:52:17.426 +0	100:	INFO: Read in 101 unique users from database
2005/08/25-13:52:17.455 +0	100:	INFO: Created object /(220) [0x8c37578/0]
2005/08/25-13:52:17.455 +0	100:	NOTIFY: Field CONTRIB_USER not known, setting unique user
fieldnumber to 20000		
2005/08/25-13:52:17.459 +0	100:	INFO: 2 CPUs CONFIGURED
2005/08/25-13:52:17.459 +0	100:	INFO: 2 CPUs ONLINE
2005/08/25-13:52:17.493 +0	100:	INFO: Created object /SYSTEM(200) [0x9f41478/1]
2005/08/25-13:52:17.493 +0	100:	INFO: Created object /SYSTEM/NODE-0(200) [0x9f41628/2]
2005/08/25-13:52:17.493 +0	100:	INFO: Created object /SYSTEM/NODE-0/INFO(200) [0x9f417d0/3]
2005/08/25-13:52:17.493 +0	100:	INFO: Changing type of /SYSTEM/NODE-0/INFO from 200 to 201
[0x9f417d0/3]		
		INFO: Created object /SYSTEM/INFO(200) [0x9f41a58/4]
2005/08/25-13:52:17.493 +0	100:	INFO: Changing type of /SYSTEM/INFO from 200 to 201
[0x9f41a58/4]		
		INFO: Created object /SYSTEM/LICENSE(200) [0x9f41d10/5]
	100:	INFO: Changing type of /SYSTEM/LICENSE from 200 to 201
[0x9f41d10/5]		
		<pre>INFO: Created object /SYSTEM/NODE-0/SRC-0(200) [0x9f41fd8/6]</pre>
	100:	INFO: Changing type of /SYSTEM/NODE-0/SRC-0 from 200 to 201
[0x9f41fd8/6]		
		<pre>INFO: Created object /SYSTEM/NODE-0/SRC-1(200) [0x9f42248/7]</pre>
	100:	INFO: Changing type of /SYSTEM/NODE-0/SRC-1 from 200 to 201
[0x9f42248/7]		
		<pre>INFO: Created object /SYSTEM/NODE-0/SRC-2(200) [0x9f425a8/8]</pre>
	100:	INFO: Changing type of /SYSTEM/NODE-0/SRC-2 from 200 to 201
[0x9f425a8/8]		

2005/08/25-13:52:17.493 +0100: INFO: Created object /SYSTEM/NODE-0/SRC-3(200) [0x9f42890/9] 2005/08/25-13:52:17.493 +0100: INFO: Changing type of /SYSTEM/NODE-0/SRC-3 from 200 to 201 [0x9f42890/9] 2005/08/25-13:52:17.494 +0100: INFO: Created object /SYSTEM/NODE-0/SRC-4(200) [0x9f42ba0/ 101 2005/08/25-13:52:17.494 +0100: INFO: Changing type of /SYSTEM/NODE-0/SRC-4 from 200 to 201 [0x9f42ba0/10] 2005/08/25-13:52:17.494 +0100: INFO: Created object /SYSTEM/NODE-0/SERVICE(200) [0x9f42eb0/ 111 2005/08/25-13:52:17.494 +0100: INFO: Created object /SYSTEM/NODE-0/SERVICE/svc1(200) [0x9f43048/12] 2005/08/25-13:52:17.494 +0100: INFO: Changing type of /SYSTEM/NODE-0/SERVICE/svc1 from 200 to 201 [0x9f43048/12] 2005/08/25-13:52:17.494 +0100: INFO: Created object /MT1(200) [0x9f43428/13] 2005/08/25-13:52:17.494 +0100: INFO: Changing type of /MT1 from 200 to 222 [0x9f43428/13] 2005/08/25-13:52:23.675 +0100: INFO: Accepted connection from 127.0.0.1 42371 2005/08/25-13:52:23.676 +0100: NOTIFY: Accepting peer id 1 on 127.0.0.1 42371 2005/08/25-13:52:33.642 +0100: INFO: Created object /SYSTEM/USERS(200) [0x9f45b80/14] 2005/08/25-13:52:33.642 +0100: INFO: Created object /SYSTEM/USERS/demouser-0(200) [0x9f45ce8/15] 2005/08/25-13:52:33.642 +0100: INFO: Changing type of /SYSTEM/USERS/demouser-0 from 200 to 202 [0x9f45ce8/15] 2005/08/25-13:52:37.114 +0100: INFO: Removed object /SYSTEM/USERS/demouser-0(202) [0x9f45ce8/15] 2005/08/25-13:52:37.114 +0100: INFO: Adding to batch-delete timer for /SYSTEM/USERS/ demouser-0(202) [0x9f45ce8/15] 2005/08/25-13:52:39.619 +0100: NOTIFY: Lost connection to peer 1 on 127.0.0.1 42371 2005/08/25-13:52:42.616 +0100: INFO: Deleted object /SYSTEM/USERS/demouser-0(202) [0x9f45ce8/15] 2005/08/25-13:52:42.863 +0100: NOTIFY: Received signal SIGINT (2) 2005/08/25-13:52:42.864 +0100: NOTIFY: Shutting down - SIGNAL (6)

14 Appendix C: Debug Levels and Messages

Please refer to the log message reference on Caplin's Client Portal available at demo.caplin.com/clientportal for a list of Liberator and DataSource log messages and their explanations.

These log message references include the internal message label, the message severity (in decreasing order - Error, Critical, Notify, Warn, Info, Debug, Config), the message that is written to the log file, and an explanation of that message.

15 Appendix D: Javaauth configuration

Follow the steps below to configure the javaauth module. The example given configures the included *examples.OpenAuthenticator* module.

Ensure java authentication has been specified in the Liberator License (see example license.conf below). Please contact Caplin Systems Ltd if the module is not present.

```
start-license
     company
               Caplin Systems
    hostname
              hostnamel
    max-users 500
               2005030330
     expire
    https
               1
     module
               cfgauth auth
     module
               openauth auth
     module
               xmlauth auth
               javaauth auth
     module
end-license
```

- Ensure there is a Sun JVM version 1.4 or higher installed. The jvm-location configuration option in *java.conf* should point to the installed location of the libjvm.so library, for example, / usr/local/jdk/jre/lib/sparc/server/libjvm.so.
- Ensure the Liberator is not running.
- Create or edit the configuration file *javaauth.conf* in the etc directory. It must contain the option **javaauth-classid** that refers to the class-id of the Java Auth module to be loaded. The Java Auth debug level is also set here. For example:

javaauth-classid authenticator debug-level debug

Edit the configuration file *java.conf* within the etc directory. The auth-module option should be set to javaauth, the jvm-location should point to the installed JVM and the jvm-global-classpath option should point to *javaauth.jar* within the *lib.java* directory.

To configure the specific Java Authenticator class to load, create an add-javaclass section and insert the classpath and class-name details for the authentication module, with a class-id which matches the class-id of the javaauth module to be loaded. For example:

auth-module	javaauth	
jvm-location	/usr/local/jdk/jre/lib/i386/server/libjvm.so	
jvm-global-classpath	%r/lib/java/javaauth.jar	
add-javaclass		
class-id	authenticator	
class-name	examples/OpenAuthenticator	
classpath	<pre>%r/lib/java/javaauth-examples.jar</pre>	
end-javaclass		

Please see Java.conf configuration on page 224 for details on the above parameters.

Start the Liberator.

16 Appendix E: Performance benchmark

16.1 Benchmark test methodology

Liberator is started on the target test machine with a pre-configured list of 100 symbols that will be subscribed to by the test clients. These symbols will initially have no field values but act as containers which can be added to the users' watchlists.

The RTTP clients are then started up on the client machine(s). The number of client sessions started is the only metric that changes from test to test. Each client subscribes randomly to 20 of the 100 symbols.

Once all the clients have been connected, logged in and subscriptions acknowledged, a lightweight DataSource program is started on the target server machine that provides continuous updates to the 100 symbols. The update rate is increased every 100 seconds throughout the test with the CPU utilisation logged as the average over each of these 100 second intervals.

A typical message consists of 5 fields or 5 updates.

		•
Hardware	Server	
	Model:	SUN 420R
	Processors:	4 x 450MHz, 4Mb Cache
	Random Access Memory:	2Gb
	Operating System:	Solaris 8
	Client 1	
	Model:	SUN 220R
	Processors:	2 x 450MHz, 4Mb Cache
	Random Access Memory:	2Gb
	Operating System:	Solaris 8

Client 2

ModelDELL/IntelProcessors:Xeon 4 x 550MHz, 2Mb CacheRandom Access Memory:2GbOperating System:RedHat Linux 2.4.2

16.2 Message content

The update message used for all these tests was a standard record object. An example of a message actually used in the tests is shown below

6c0R0001 4=/B/OBJ_00 5=1732 6=1000 7=1000 8=0032

16.3 Results

The following headline results represent achievable performance with the system running at no more than 50% utilisation in each case.

Note: These results were obtained using Liberator running on a Solaris platform.

At 50% CPU utilisation

- 5,000 concurrent users can each receive 250 updates per second giving 1.25 million user updates per second.
- 7,500 concurrent users can each receive 116 updates per second giving 870,000 user updates per second.
- 10,000 concurrent users can each receive 110 updates per second giving 1.1 million user updates per second.

At 36% CPU utilisation

 2,500 concurrent users can each receive 500 updates per second giving 1.25 million user updates per second.

Α

active request 44 active-discard-timeout 121, 175 add-authdir 24, 104, 151, 165 add-cluster-node 41, 186 add-field 94, 187 add-javaclass 225 add-log-cycle 129, 160 add-monuser 226 add-newscodes 97, 214 add-object 90, 91, 175 add-peer 111, 112, 115, 122, 153, 190 add-sigkey 109, 217, 222 add-source-mapping 210 add-thread 83, 89, 212 add-type-mapping 90, 178 add-user 108, 218 add-virtual-host 85, 173 application-name 155, 156 application-root 155 architecture 18 internal 18 system 21 Auth Module 24, 103, 106, 181, 222 auth_new_user 105 authentication 103 auth-login-timeout 105, 182 auth-map-timeout 106, 182 auth-moddir 103, 181 auth-module 104, 107, 181 authorisation 103

В

broadcast 29, 43, 111 buf-cache-size 101, 211 buf-elem-len 101, 143, 211 buffering 100, 143 burst-max 100, 143, 211 burst-min 100, 143 bursts 100, 143

С

cache 27. 28. 82. 90 catch-crash 130, 155 cfgauth 107, 218, 221 cfgpass 221 chat 79 cipher 195, 196 cluster-addr 185 cluster-cache-request-objects 185 cluster-cache-source-routing 185, 186 cluster-index 42, 185 Clustering 22 clustering 185 cluster-port 185 command to change debug level 138 to reset peer connections 115

D

data 25 sources 25 Type 1 81, 114, 179 Type 2 81, 95, 114, 144, 179 Type 3 82, 96, 114, 179 Data health checking 78 DataSource peer 110 configuration parameters 189 connecting to 112 failover 112 Liberator as 111 reconnecting 114 replaying data from 121, 123 requesting updates from 116 DataSource, protocol 80, 237 datasrc id 115 datasrc-auto-replay 122, 199 datasrc-auto-replay-days 122, 199

datasrc-auto-replay-files 122, 199 datasrc-default-obj-hash-size 117, 190, 193 datasrc-id 111, 189, 192 datasrc-interface 112, 189 datasrc-name 111, 189, 192 datasrc-pkt-log 127, 189 datasrc-port 112, 190, 194 datasrc-reject-new-peers 114, 189 datasrc-sslport 112, 152, 190 debua UDP command 138 debug level command to change 138 default-type 90, 178 definition of Liberator 17 direct-interface 89, 174 direct-max-line-length 146, 167 directory 79 direct-port 89, 174 direct-tcp-nodelay-off 145, 212 discarding 235, 237

Ε

encrypted-passwords 108, 221 event log 241 event-log 127, 155

F

failover 238 fields 80 fields.conf 237 fields-file 94, 187 file descriptors 147, 149

Η

hashtables 144 header 146 heartbeat 135, 184 heartbeat-slack-time 114, 195 heartbeat-time 114, 195 http-access-log 127, 165, 240 http-connection-cookie-enable 84 http-connection-cookie-expires 84 http-def-content-type 164 http-err-content-type 165 http-error-log 127, 165 http-idx-content-type 165 http-indexfile 164 http-interface 83, 163 http-keepalive-max 83, 163 http-keepalive-timeout 83, 164 http-max-body-length 146, 167 http-max-header-line-length 146, 167 http-max-header-lines 146, 167 http-max-request-length 146, 167 http-port 83, 163 http-rttp-content-type 164 https-certificate 86, 170, 173 https-cipher-list 171 https-enable 84, 170 https-interface 85, 170 https-passwordfile 85, 87, 171, 173 https-port 86, 170 https-privatekey 86, 170, 173 http-tcp-nodelay-off 145, 213 http-wwwroot 163, 173

improving performance 143 include-file 156 installation licence 38 secure 38 IP address 25

J

Java Virtual Machine 224

java-file 224 JMX user access configuring 226 JMX user credentials configuring 226 JVM See Java Virtual Machine jvm-global-classpath 225 jvm-options 225

Κ

key 24, 82 KeyMaster Integration 24

L

Liberator 17 as DataSource peer 111 features 22 licence 38, 233 licence.conf 38 license-file 156 Linux 23, 30 logcat 126 log-cycle-offset 129, 158 log-cycle-period 128, 157, 158, 162 log-cycle-suffix 129, 158 log-cycle-time 128, 157 log-dir 126, 157 logging 126, 157 logging 126, 157 log-maxsize 129, 157

Μ

max-user-limit 105, 181 max-user-ok 105, 181 max-user-warn 105, 181 monitoring access configuring 226 monitoring user configuring 226

Ν

news 79. 101 configuring 214 replaying 123 newscode-exceptions 97, 214 newscode-hash-size 97, 215 newscode-max-length 97, 214 newscodes-valid-chars 97, 215 news-datetime-format 101, 215 newsitems-max 101, 214, 215 newsitems-saved 101, 214 news-log 123, 215, 216 news-purge-days 215 news-purge-time 215 news-replay 123, 216 news-replay-days 123, 216 news-replay-files 123, 216 noauth-reconnect 106, 183

0

object-hash-size 145, 210 object-log 127, 183 object-map 90, 179 object-precache-enable 179 objects 78 object-throttle-default-level 100, 175 object-throttle-off 100, 175 object-throttle-off 100, 175 object-throttle-times 92, 99, 175, 177 openauth 107, 220 OpenSSL 16, 86, 87, 88, 171, 172 output-queue-size 101, 211

Ρ

packet log 236, 237, 238 page 79 parameter 80 peer connection command to connect after failure 115 peer-reconnect UDP command 115 permissioning 24 Persistent virtual connection 78 pid-filename 156 port 25 priority 186 purge-age 91, 92 purge-period 91, 92 purge-period 91, 92 purge-time 90 purging 27, 28, 82, 90

Q

queue 27

R

read-access 107, 220 record 79.80 record-max-cache 96, 175 record-type1-clear-on-failover 114, 179 record-type2-clear-on-failover 114, 179 record-type2-hash-size 144 record-type2-hashsize 96, 180 record-type3-clear-on-failover 114 replaying data 121, 123, 199 requested-fields-only 145, 188 requesting 26, 79, 234, 235, 237 request-log 127, 183 request-timeout 193 **RTML 134 RTSL 134** RTTP 77 definition 77 features 77 fields 80 objects 78 runtime-user 155

S

SDK 224 security 146 service 120, 201 service-request-timeout 120 session log 232, 233, 234 session-hash-size 144, 210 session-heartbeat 136, 184 session-log 127, 183 session-reconnect-timeout 106, 184 session-timeout 106, 183 signature 24, 222 signature-hashsize 109, 217 signature-validtime 108, 217, 218 SL4B 25, 150 Solaris 26 source 121 source-request-timeout 201 sources, data 25 ssl-engine-flags 88, 172 ssl-engine-id 87, 172 ssl-random-seed 86, 171 start-ssl 152 startup 26, 27 symbol 80, 82 system-max-files 147, 155

T

TCP nodelay 145 threads 143 threads-num 144, 212 throttling 175 timestamp 233, 234, 235, 238 tunnelling 77 type1-host 185 type1-port 186 type2-url 186

U

UDP commands 136 debug 138 example of 139 peer-reconnect 115 to change debug level 138 to reset peer connections 115 UDP message command to send 136 UDP messages 114, 219 udp-interface 115, 136, 219 udp-port 115, 136, 219 udpsend command to send UDP message 136 user-hash-size 105, 144, 210 users, concurrent 17

W

web site, Liberator 24 Windows 26, 40 write-access 107, 220 XML 24 XMLauth 106, 181

X-Y-Z

175

CAPLIN

The information contained in this publication is subject to UK, US and international copyright laws and treaties and all rights are reserved. No part of this publication may be reproduced or transmitted in any form or by any means without the written authorisation of an Officer of Caplin Systems Limited.

Various Caplin technologies described in this document are the subject of patent applications. All trademarks, company names, logos and service marks/names ("Marks") displayed in this publication are the property of Caplin or other third parties and may be registered trademarks. You are not permitted to use any Mark without the prior written consent of Caplin or the owner of that Mark.

This publication is provided "as is" without warranty of any kind, either express or implied, including, but not limited to, warranties of merchantability, fitness for a particular purpose, or noninfringement.

This publication could include technical inaccuracies or typographical errors and is subject to change without notice. Changes are periodically added to the information herein; these changes will be incorporated in new editions of this publication. Caplin Systems Limited may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time.

Contact Us

 Triton Court

 14 Finsbury Square

 London EC2A 1BR

 UK

 Telephone:
 +44 20 7826 9600

 Fax:
 +44 20 7826 9610

www.caplin.com

info@caplin.com